



CUDA Binary Utilities

Application Note

Table of Contents

Chapter 1. Overview.....	1
1.1. What is a CUDA Binary?.....	1
1.2. Differences between cuobjdump and nvdiasm.....	1
1.3. Command Option Types and Notation.....	2
Chapter 2. cuobjdump.....	4
2.1. Usage.....	4
2.2. Command-line Options.....	7
Chapter 3. nvdiasm.....	9
3.1. Usage.....	9
3.1.1. Control flow graph information.....	10
3.1.2. Register liveness information.....	13
3.1.3. Debug information.....	13
3.2. Command-line Options.....	15
Chapter 4. Instruction Set Reference.....	18
4.1. Maxwell and Pascal Instruction Set.....	18
4.2. Volta Instruction Set.....	21
4.3. Turing Instruction Set.....	25
4.4. Ampere and Ada Instruction Set.....	31
4.5. Hopper Instruction Set.....	36
Chapter 5. cu++filt.....	43
5.1. Usage.....	43
5.2. Command-line Options.....	44
5.3. Library Availability.....	45
Chapter 6. nvprune.....	47
6.1. Usage.....	47
6.2. Command-line Options.....	47

List of Figures

Figure 1. Control Flow Graph	11
Figure 2. Basic Block Control Flow Graph	12

List of Tables

Table 1. Comparison of cuobjdump and nvdiasm	1
Table 2. cuobjdump Command-line Options	7
Table 3. nvdiasm Command-line Options	15
Table 4. Maxwell and Pascal Instruction Set	18
Table 5. Volta Instruction Set	22
Table 6. Turing Instruction Set	26
Table 7. Ampere and Ada Instruction Set	31
Table 8. Hopper Instruction Set	36
Table 9. cu++filt Command-line Options	44
Table 10. nvprune Command-line Options	48

Chapter 1. Overview

This document introduces `cuobjdump`, `nvdiasm`, `cu++filt` and `nvprune`, four CUDA binary tools for Linux(x86, ARM and P9), Windows, Mac OS and Android.

1.1. What is a CUDA Binary?

A CUDA binary (also referred to as cubin) file is an ELF-formatted file which consists of CUDA executable code sections as well as other sections containing symbols, relocators, debug info, etc. By default, the CUDA compiler driver `nvcc` embeds cubin files into the host executable file. But they can also be generated separately by using the `-cubin` option of `nvcc`. cubin files are loaded at run time by the CUDA driver API.



Note: For more details on cubin files or the CUDA compilation trajectory, refer to [NVIDIA CUDA Compiler Driver NVCC](#).

1.2. Differences between `cuobjdump` and `nvdiasm`

CUDA provides two binary utilities for examining and disassembling cubin files and host executables: `cuobjdump` and `nvdiasm`. Basically, `cuobjdump` accepts both cubin files and host binaries while `nvdiasm` only accepts cubin files; but `nvdiasm` provides richer output options.

Here's a quick comparison of the two tools:

Table 1. Comparison of `cuobjdump` and `nvdiasm`

	<code>cuobjdump</code>	<code>nvdiasm</code>
Disassemble cubin	Yes	Yes
Extract ptx and extract and disassemble cubin from the following input files: ▶ Host binaries	Yes	No

	cuobjdump	nvdiasm
<ul style="list-style-type: none"> ▶ Executables ▶ Object files ▶ Static libraries ▶ External fatbinary files 		
Control flow analysis and output	No	Yes
Advanced display options	No	Yes

1.3. Command Option Types and Notation

This section of the document provides common details about the command line options for the following tools:

- ▶ [cuobjdump](#)
- ▶ [nvdiasm](#)
- ▶ [nvprune](#)

Each command-line option has a long name and a short name, which are interchangeable with each other. These two variants are distinguished by the number of hyphens that must precede the option name, i.e. long names must be preceded by two hyphens and short names must be preceded by a single hyphen. For example, `-I` is the short name of `--include-path`. Long options are intended for use in build scripts, where size of the option is less important than descriptive value and short options are intended for interactive use.

The tools mentioned above recognize three types of command options: boolean options, single value options and list options.

Boolean options do not have an argument, they are either specified on a command line or not. Single value options must be specified at most once and list options may be repeated. Examples of each of these option types are, respectively:

```
Boolean option : nvdiasm --print-raw <file>
Single value   : nvdiasm --binary SM70 <file>
List options   : cuobjdump --function "foo,bar,foobar" <file>
```

Single value options and list options must have arguments, which must follow the name of the option by either one or more spaces or an equals character. When a one-character short name such as `-I`, `-l`, and `-L` is used, the value of the option may also immediately follow the option itself without being separated by spaces or an equal character. The individual values of list options may be separated by commas in a single instance of the option or the option may be repeated, or any combination of these two cases.

Hence, for the two sample options mentioned above that may take values, the following notations are legal:

```
-o file
```

```
-o=file  
-I dir1,dir2 -I=dir3 -I dir4,dir5
```

For options taking a single value, if specified multiple times, the rightmost value in the command line will be considered for that option. In the below example, `test.bin` binary will be disassembled assuming `SM75` as the architecture.

```
nvdiasm.exe -b SM70 -b SM75 test.bin  
nvdiasm warning : incompatible redefinition for option 'binary', the last value of  
this option was used
```

For options taking a list of values, if specified multiple times, the values get appended to the list. If there are duplicate values specified, they are ignored. In the below example, functions `foo` and `bar` are considered as valid values for option `--function` and the duplicate value `foo` is ignored.

```
cuobjdump --function "foo" --function "bar" --function "foo" -sass test.cubin
```

Chapter 2. cuobjdump

cuobjdump extracts information from CUDA binary files (both standalone and those embedded in host binaries) and presents them in human readable format. The output of cuobjdump includes CUDA assembly code for each kernel, CUDA ELF section headers, string tables, relocators and other CUDA specific sections. It also extracts embedded ptx text from host binaries.

For a list of CUDA assembly instruction set of each GPU architecture, see [Instruction Set Reference](#).

2.1. Usage

cuobjdump accepts a single input file each time it's run. The basic usage is as following:

```
cuobjdump [options] <file>
```

To disassemble a standalone cubin or cubins embedded in a host executable and show CUDA assembly of the kernels, use the following command:

```
cuobjdump -sass <input file>
```

To dump cuda elf sections in human readable format from a cubin file, use the following command:

```
cuobjdump -elf <cubin file>
```

To extract ptx text from a host binary, use the following command:

```
cuobjdump -ptx <host binary>
```

Here's a sample output of cuobjdump:

```
$ cuobjdump a.out -sass -ptx
Fatbin elf code:
=====
arch = sm_70
code version = [1,7]
producer = cuda
host = linux
compile_size = 64bit
identifier = add.cu

code for sm_70
```



```

Function : _Z3addPiS_S
.headerflags @"EF_CUDA_SM70_EF_CUDA_PTX_SM(EF_CUDA_SM70)"
/*0000*/      IMAD.MOV.U32 R1, RZ, RZ, c[0x0][0x28] ; /* 0x00000a00ff017624 */
/*0010*/      @!PT SHFL.IDX PT, RZ, RZ, RZ, RZ ; /* 0x000fd000078e00ff */
/*0020*/      IMAD.MOV.U32 R2, RZ, RZ, c[0x0][0x160] ; /* 0x000000ffffff389 */
/*0030*/      MOV R3, c[0x0][0x164] ; /* 0x000fe200000e00ff */
/*0040*/      IMAD.MOV.U32 R4, RZ, RZ, c[0x0][0x168] ; /* 0x00005800ff027624 */
/*0050*/      MOV R5, c[0x0][0x16c] ; /* 0x000fe200078e00ff */
/*0060*/      LDG.E.SYS R2, [R2] ; /* 0x00005b0000057a02 */
/*0070*/      LDG.E.SYS R5, [R4] ; /* 0x000fcc0000000f00 */
/*0080*/      IMAD.MOV.U32 R6, RZ, RZ, c[0x0][0x170] ; /* 0x000005a00ff047624 */
/*0090*/      MOV R7, c[0x0][0x174] ; /* 0x000fe200078e00ff */
/*00a0*/      IADD3 R9, R2, R5, RZ ; /* 0x00005d0000077a02 */
/*00b0*/      STG.E.SYS [R6], R9 ; /* 0x000fe40000000f00 */
/*00c0*/      EXIT ; /* 0x0000000502097210 */
/*00d0*/      BRA 0xd0; /* 0x004fd00007ffe0ff */
/*00e0*/      NOP; /* 0x0000000906007386 */
/*00f0*/      NOP; /* 0x000fe2000010e900 */
/*0100*/      NOP; /* 0x00000000000794d */
/*0110*/      NOP; /* 0x000fea0003800000 */
/*0120*/      NOP; /* 0xfffffff000007947 */
/*0130*/      NOP; /* 0x000fc0000383ffff */
/*0140*/      NOP; /* 0x0000000000007918 */
/*0150*/      NOP; /* 0x000fc00000000000 */
/*0160*/      NOP; /* 0x0000000000007918 */
/*0170*/      NOP; /* 0x000fc00000000000 */
.....

```

Fatbin ptx code:

=====

```

arch = sm_70
code version = [7,0]
producer = cuda
host = linux
compile_size = 64bit
compressed
identifier = add.cu

```

```

.version 7.0
.target sm_70
.address_size 64

```

```

.visible .entry _Z3addPiS_S_(
.param .u64 _Z3addPiS_S_param_0,
.param .u64 _Z3addPiS_S_param_1,
.param .u64 _Z3addPiS_S_param_2
)
{
.reg .s32 %r<4>;
.reg .s64 %rd<7>;

```

```

ld.param.u64 %rd1, [_Z3addPiS_S_param_0];
ld.param.u64 %rd2, [_Z3addPiS_S_param_1];
ld.param.u64 %rd3, [_Z3addPiS_S_param_2];
cvta.to.global.u64 %rd4, %rd3;
cvta.to.global.u64 %rd5, %rd2;
cvta.to.global.u64 %rd6, %rd1;

```

```
ld.global.u32 %r1, [%rd6];
ld.global.u32 %r2, [%rd5];
add.s32 %r3, %r2, %r1;
st.global.u32 [%rd4], %r3;
ret;
}
```

As shown in the output, the `a.out` host binary contains cubin and ptx code for `sm_70`.

To list cubin files in the host binary use `-lelf` option:

```
$ cuobjdump a.out -lelf
ELF file      1: add_new.sm_70.cubin
ELF file      2: add_new.sm_75.cubin
ELF file      3: add_old.sm_70.cubin
ELF file      4: add_old.sm_75.cubin
```

To extract all the cubins as files from the host binary use `-xelf all` option:

```
$ cuobjdump a.out -xelf all
Extracting ELF file      1: add_new.sm_70.cubin
Extracting ELF file      2: add_new.sm_75.cubin
Extracting ELF file      3: add_old.sm_70.cubin
Extracting ELF file      4: add_old.sm_75.cubin
```

To extract the cubin named `add_new.sm_70.cubin`:

```
$ cuobjdump a.out -xelf add_new.sm_70.cubin
Extracting ELF file      1: add_new.sm_70.cubin
```

To extract only the cubins containing `_old` in their names:

```
$ cuobjdump a.out -xelf _old
Extracting ELF file      1: add_old.sm_70.cubin
Extracting ELF file      2: add_old.sm_75.cubin
```

You can pass any substring to `-xelf` and `-xptx` options. Only the files having the substring in the name will be extracted from the input binary.

To dump common and per function resource usage information:

```
$ cuobjdump test.cubin -res-usage
Resource usage:
Common:
  GLOBAL:56 CONSTANT[3]:28
Function calculate:
  REG:24 STACK:8 SHARED:0 LOCAL:0 CONSTANT[0]:472 CONSTANT[2]:24 TEXTURE:0 SURFACE:0 SAMPLER:0
Function mysurf_func:
  REG:38 STACK:8 SHARED:4 LOCAL:0 CONSTANT[0]:532 TEXTURE:8 SURFACE:7 SAMPLER:0
Function mytexsampler_func:
  REG:42 STACK:0 SHARED:0 LOCAL:0 CONSTANT[0]:472 TEXTURE:4 SURFACE:0 SAMPLER:1
```

Note that value for REG, TEXTURE, SURFACE and SAMPLER denotes the count and for other resources it denotes no. of byte(s) used.

2.2. Command-line Options

[Table 2](#) contains supported command-line options of `cuobjdump`, along with a description of what each option does. Each option has a long name and a short name, which can be used interchangeably.


Table 2. `cuobjdump` Command-line Options

Option (long)	Option (short)	Description
<code>--all-fatbin</code>	<code>-all</code>	Dump all fatbin sections. By default will only dump contents of executable fatbin (if exists), else relocatable fatbin if no executable fatbin.
<code>--dump-elf</code>	<code>-elf</code>	Dump ELF Object sections.
<code>--dump-elf-symbols</code>	<code>-symbols</code>	Dump ELF symbol names.
<code>--dump-ptx</code>	<code>-ptx</code>	Dump PTX for all listed device functions.
<code>--dump-sass</code>	<code>-sass</code>	Dump CUDA assembly for a single cubin file or all cubin files embedded in the binary.
<code>--dump-resource-usage</code>	<code>-res-usage</code>	Dump resource usage for each ELF. Useful in getting all the resource usage information at one place.
<code>--extract-elf <partial file name>,...</code>	<code>-xelf</code>	Extract ELF file(s) name containing <partial file name> and save as file(s). Use 'all' to extract all files. To get the list of ELF files use '-lelf' option. Works with host executable/object/library and external fatbin. All 'dump' and 'list' options are ignored with this option.
<code>--extract-ptx <partial file name>,...</code>	<code>-xptx</code>	Extract PTX file(s) name containing <partial file name> and save as file(s). Use 'all' to extract all files. To get the list of PTX files use '-lptx' option. Works with host executable/object/library and external fatbin. All 'dump' and 'list' options are ignored with this option.
<code>--function <function name>,...</code>	<code>-fun</code>	Specify names of device functions whose fat binary structures must be dumped.
<code>--function-index <function index></code>	<code>-findex</code>	Specify symbol table index of the function whose fat binary structures must be dumped.
<code>--gpu-architecture <gpu architecture name></code>	<code>-arch</code>	Specify GPU Architecture for which information should be dumped. Allowed values for this option: 'sm_50', 'sm_52', 'sm_53', 'sm_60', 'sm_61', 'sm_62', 'sm_70', 'sm_72', 'sm_75', 'sm_80', 'sm_86', 'sm_87', 'sm_89', 'sm_90'.
<code>--help</code>	<code>-h</code>	Print this help information on this tool.

Option (long)	Option (short)	Description
<code>--list-elf</code>	<code>-lelf</code>	List all the ELF files available in the fatbin. Works with host executable/object/library and external fatbin. All other options are ignored with this flag. This can be used to select particular ELF with <code>-xelF</code> option later.
<code>--list-ptx</code>	<code>-lptx</code>	List all the PTX files available in the fatbin. Works with host executable/object/library and external fatbin. All other options are ignored with this flag. This can be used to select particular PTX with <code>-xptx</code> option later.
<code>--options-file <file>,...</code>	<code>-optf</code>	Include command line options from specified file.
<code>--sort-functions</code>	<code>-sort</code>	Sort functions when dumping sass.
<code>--version</code>	<code>-V</code>	Print version information on this tool.

Chapter 3. nvdiasm

`nvdiasm` extracts information from standalone cubin files and presents them in human readable format. The output of `nvdiasm` includes CUDA assembly code for each kernel, listing of ELF data sections and other CUDA specific sections. Output style and options are controlled through `nvdiasm` command-line options. `nvdiasm` is also capable to do control flow analysis to annotate jump/branch targets and data flow analysis to analyse register usage.

 **Note:** `nvdiasm` requires complete relocation information to do control flow analysis. If this information is missing from the CUDA binary, either use the `nvdiasm` option `"-ndf"` to turn off control flow analysis, or use the `ptxas` and `nvlink` option `"-preserve-relocs"` to re-generate the cubin file.

For a list of CUDA assembly instruction set of each GPU architecture, see [Instruction Set Reference](#).

3.1. Usage

`nvdiasm` accepts a single input file each time it's run. The basic usage is as following:

```
nvdiasm [options] <input cubin file>
```

Here's a sample output of `nvdiasm`:

```
.headerflags    @"EF_CUDA_TEXMODE_UNIFIED EF_CUDA_64BIT_ADDRESS EF_CUDA_SM70
                EF_CUDA_VIRTUAL_SM(EF_CUDA_SM70)"
.elftype        @"ET_EXEC"

//----- .nv.info -----
.section        .nv.info,"",@"SHT_CUDA_INFO"
.align 4

.....

//----- .text._Z9acos_main10acosParams -----
.section        .text._Z9acos_main10acosParams,"ax",@progbits
.sectioninfo    @"SHI_REGISTERS=14"
.align 128
    .global      _Z9acos_main10acosParams
    .type        _Z9acos_main10acosParams,@function
    .size        _Z9acos_main10acosParams, (.L_21 - _Z9acos_main10acosParams)
    .other       _Z9acos_main10acosParams,@"STO_CUDA_ENTRY STV_DEFAULT"
_Z9acos_main10acosParams:
```

```

.text._Z9acos_main10acosParams:
/*0000*/      MOV R1, c[0x0][0x28] ;
/*0010*/      NOP;
/*0020*/      S2R R0, SR_CTAID.X ;
/*0030*/      S2R R3, SR_TID.X ;
/*0040*/      IMAD R0, R0, c[0x0][0x0], R3 ;
/*0050*/      ISETP.GE.AND P0, PT, R0, c[0x0][0x170], PT ;
/*0060*/      @P0 EXIT ;

.L_1:
/*0070*/      MOV R11, 0x4 ;
/*0080*/      IMAD.WIDE R2, R0, R11, c[0x0][0x160] ;
/*0090*/      LDG.E.SYS R2, [R2] ;
/*00a0*/      MOV R7, 0x3d53f941 ;
/*00b0*/      FADD.FTZ R4, |R2|.reuse, -RZ ;
/*00c0*/      FSETP.GT.FTZ.AND P0, PT, |R2|.reuse, 0.5699, PT ;
/*00d0*/      FSETP.GEU.FTZ.AND P1, PT, R2, RZ, PT ;
/*00e0*/      FADD.FTZ R5, -R4, 1 ;
/*00f0*/      IMAD.WIDE R2, R0, R11, c[0x0][0x168] ;
/*0100*/      FMUL.FTZ R5, R5, 0.5 ;
/*0110*/      @P0 MUFU.SQRT R4, R5 ;
/*0120*/      MOV R5, c[0x0][0x0] ;
/*0130*/      IMAD R0, R5, c[0x0][0xc], R0 ;
/*0140*/      FMUL.FTZ R6, R4, R4 ;
/*0150*/      FFMA.FTZ R7, R6, R7, 0.018166976049542427063 ;
/*0160*/      FFMA.FTZ R7, R6, R7, 0.046756859868764877319 ;
/*0170*/      FFMA.FTZ R7, R6, R7, 0.074846573173999786377 ;
/*0180*/      FFMA.FTZ R7, R6, R7, 0.16667014360427856445 ;
/*0190*/      FMUL.FTZ R7, R6, R7 ;
/*01a0*/      FFMA.FTZ R7, R4, R7, R4 ;
/*01b0*/      FADD.FTZ R9, R7, R7 ;
/*01c0*/      @!P0 FADD.FTZ R9, -R7, 1.5707963705062866211 ;
/*01d0*/      ISETP.GE.AND P0, PT, R0, c[0x0][0x170], PT ;
/*01e0*/      @!P1 FADD.FTZ R9, -R9, 3.1415927410125732422 ;
/*01f0*/      STG.E.SYS [R2], R9 ;
/*0200*/      @!P0 BRA `(.L_1) ;
/*0210*/      EXIT ;

.L_2:
/*0220*/      BRA `(.L_2);

.L_21:

```

3.1.1. Control flow graph information

To generate the control flow graph of a kernel, use the following:

```
nvdiasm -cfg <input cubin file>
```


nvdiasm generates control flow in the DOT graph description language format. The output of the control flow from nvdiasm can be imported to a DOT graph visualization tool such as [Graphviz](#).

To generate a PNG image (cfg.png) of the control flow of the above cubin (a.cubin) with nvdiasm and Graphviz:

```
nvdiasm -cfg a.cubin | dot -ocfg.png -Tpng
```

The generated visual graph is:

Figure 1. Control Flow Graph

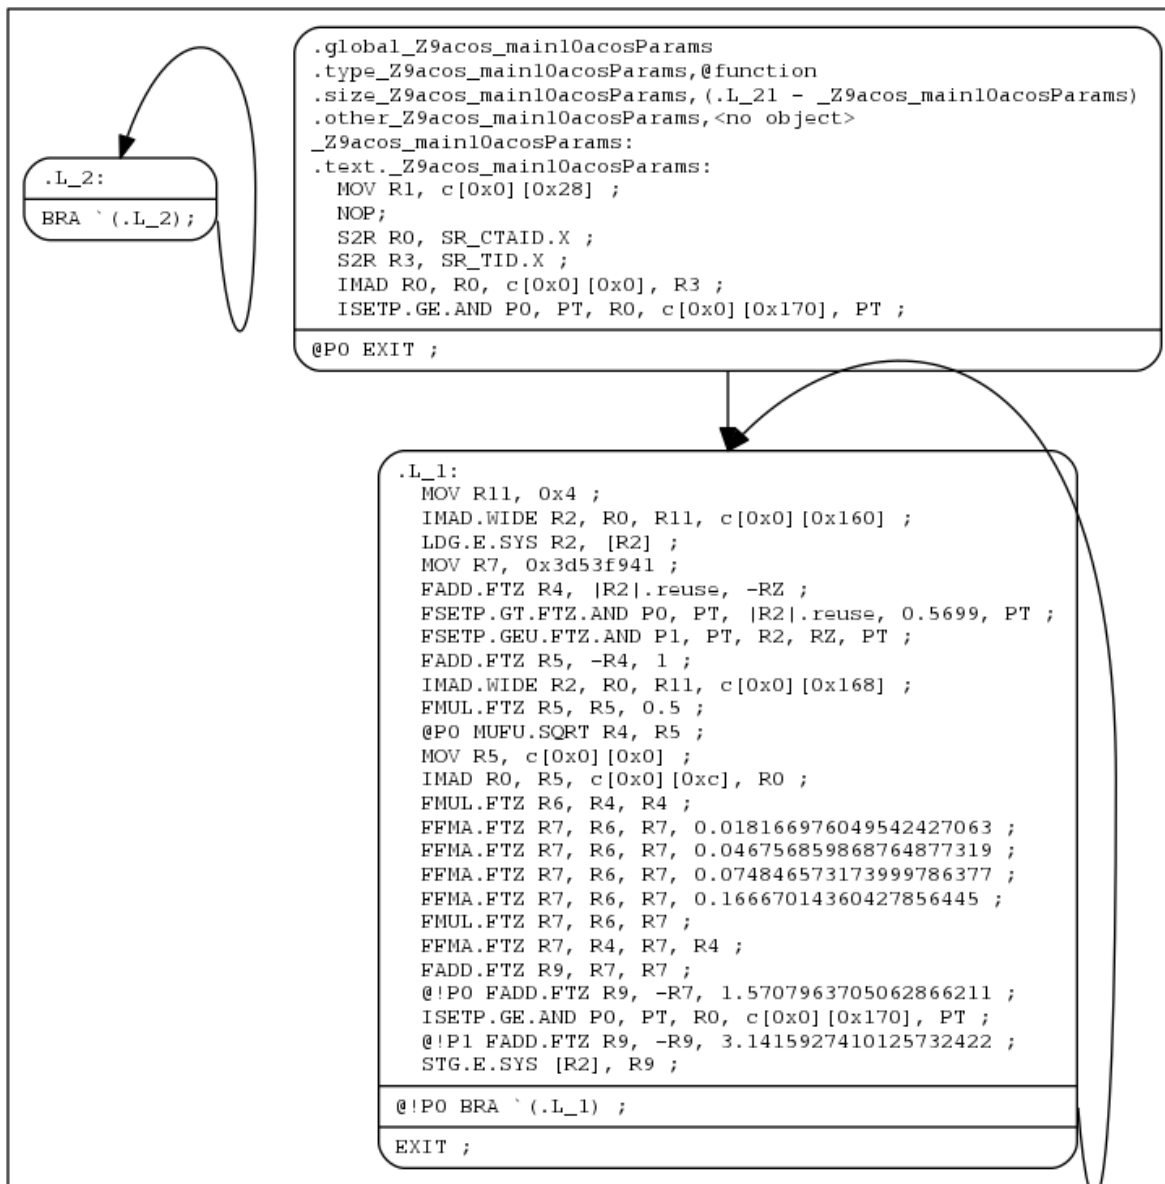


To generate a PNG image (bbcfg.png) of the basic block control flow of the above cubin (a.cubin) with nvdiasm and Graphviz:

```
nvdiasm -bbcfg a.cubin | dot -obbcfg.png -Tpng
```

Here's the generated graph:

Figure 2. Basic Block Control Flow Graph

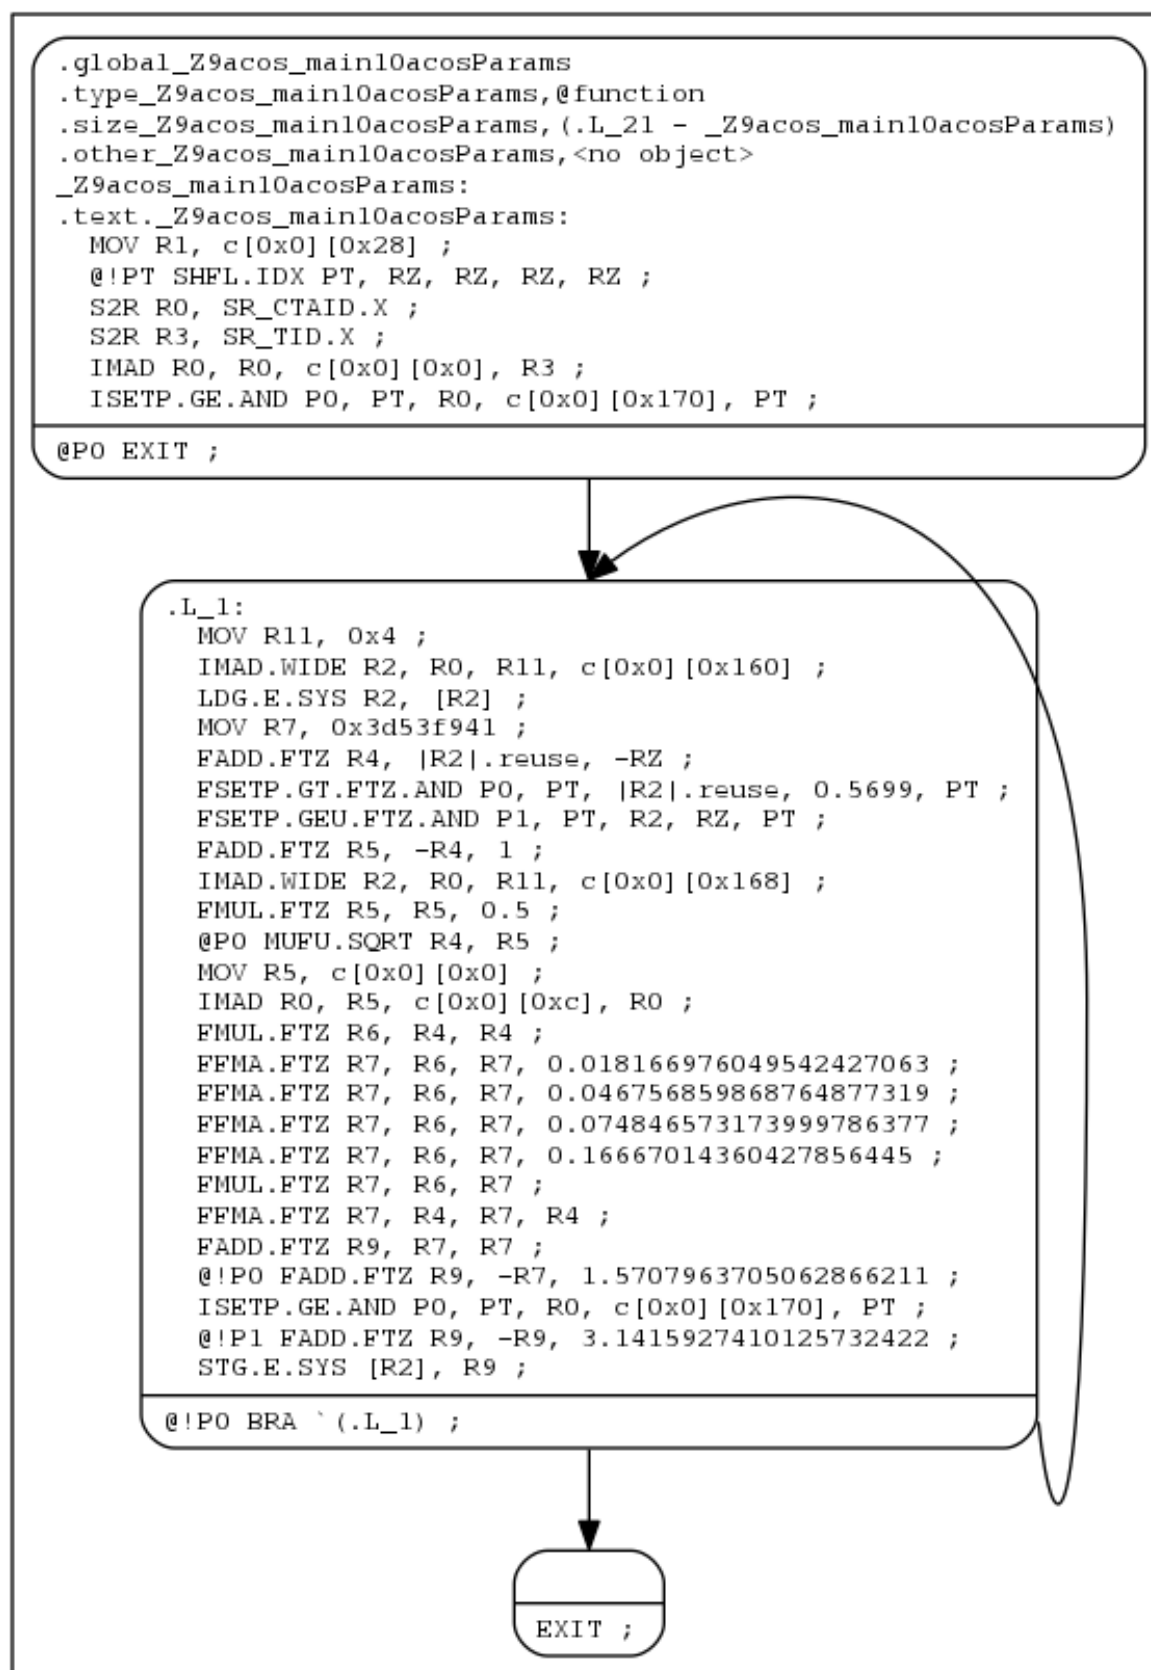

3.1.2. Register liveness information

nvdiasm is capable of showing register (general and predicate) liveness range information. For each line of CUDA assembly, nvdiasm displays whether a given device register was assigned, accessed, live or re-assigned. It also shows the total number of registers used. This is useful if the user is interested in the life range of any particular register, or register usage in general.

Here's a sample output (output is pruned for brevity):

```

// +-----+-----+
// |               | PRED |
// |               |-----|
// |               | # 01 |
// |               |-----|
// +-----+-----+
.global acos
.type   acos,@function
.size   acos, (.L_21 - acos)
.other  acos,@"STO_CUDA_ENTRY STV_DEFAULT"
acos:
.text.acos:
MOV R1, c[0x0][0x28] ;
NOP;
S2R R0, SR_CTAID.X ;
S2R R3, SR_TID.X ;
IMAD R0, R0, c[0x0][0x0], R3 ;
ISETP.GE.AND P0, PT, R0, c[0x0][0x170], PT ;
@P0 EXIT ;
.L_1:
MOV R11, 0x4 ;
IMAD.WIDE R2, R0, R11, c[0x0][0x160] ;
LDG.E.SYS R2, [R2] ;
MOV R7, 0x3d53f941 ;
FADD.FTZ R4, [R2].reuse, -RZ ;
FSETP.GT.FTZ.AND P0, PT, [R2].reuse, 0.5699, PT;
FSETP.GEU.FTZ.AND P1, PT, R2, RZ, PT ;
FADD.FTZ R5, -R4, 1 ;
IMAD.WIDE R2, R0, R11, c[0x0][0x168] ;
FMUL.FTZ R5, R5, 0.5 ;
@P0 MUFU.SQRT R4, R5 ;
MOV R5, c[0x0][0x0] ;
IMAD R0, R5, c[0x0][0xc], R0 ;
FMUL.FTZ R6, R4, R4 ;
FFMA.FTZ R7, R6, R7, 0.018166976049542427063 ;
FFMA.FTZ R7, R6, R7, 0.046756859868764877319 ;
FFMA.FTZ R7, R6, R7, 0.074846573173999786377 ;
FFMA.FTZ R7, R6, R7, 0.16667014360427856445 ;
FMUL.FTZ R7, R6, R7 ;
FFMA.FTZ R7, R4, R7, R4 ;
FADD.FTZ R9, R7, R7 ;
@!P0 FADD.FTZ R9, -R7, 1.5707963705062866211 ;
ISETP.GE.AND P0, PT, R0, c[0x0][0x170], PT ;
@!P1 FADD.FTZ R9, -R9, 3.1415927410125732422 ;
STG.E.SYS [R2], R9 ;
@!P0 BRA (.L_1) ;
EXIT ;
.L_2:
BRA (.L_2);
.L_21:
// Legend:
// ^      : Register assignment
// v      : Register usage
// x      : Register usage and reassignment
// :      : Register in use
// <space>: Register not in use
// #      : Number of occupied registers

```

3.1.3. Debug information

nvdiasm is capable of showing line number information of the CUDA source file which can be useful for debugging.

To get the line-info of a kernel, use the following:

```
nvdiasm -g <input cubin file>
```

Here's a sample output of a kernel using `nvdiasm -g` command:

```
//----- .text._Z6kernali -----
.section      .text._Z6kernali,"ax",@progbits
.sectioninfo  @"SHI_REGISTERS=24"
.align       128
.global      _Z6kernali
.type        _Z6kernali,@function
.size        _Z6kernali,(.L_4 - _Z6kernali)
.other       _Z6kernali,@"STO_CUDA_ENTRY STV_DEFAULT"
_Z6kernali:
.text._Z6kernali:
/*0000*/          MOV R1, c[0x0][0x28] ;
/*0010*/          NOP;
//## File "/home/user/cuda/sample/sample.cu", line 25
/*0020*/          MOV R0, 0x160 ;
/*0030*/          LDC R0, c[0x0][R0] ;
/*0040*/          MOV R0, R0 ;
/*0050*/          MOV R2, R0 ;
//## File "/home/user/cuda/sample/sample.cu", line 26
/*0060*/          MOV R4, R2 ;
/*0070*/          MOV R20, 32@lo((_Z6kernali + .L_1@srel)) ;
/*0080*/          MOV R21, 32@hi((_Z6kernali + .L_1@srel)) ;
/*0090*/          CALL.ABS.NOINC `(_Z3fooi) ;
.L_1:
/*00a0*/          MOV R0, R4 ;
/*00b0*/          MOV R4, R2 ;
/*00c0*/          MOV R2, R0 ;
/*00d0*/          MOV R20, 32@lo((_Z6kernali + .L_2@srel)) ;
/*00e0*/          MOV R21, 32@hi((_Z6kernali + .L_2@srel)) ;
/*00f0*/          CALL.ABS.NOINC `(_Z3bari) ;
.L_2:
/*0100*/          MOV R4, R4 ;
/*0110*/          IADD3 R4, R2, R4, RZ ;
/*0120*/          MOV R2, 32@lo(arr) ;
/*0130*/          MOV R3, 32@hi(arr) ;
/*0140*/          MOV R2, R2 ;
/*0150*/          MOV R3, R3 ;
/*0160*/          ST.E.SYS [R2], R4 ;
//## File "/home/user/cuda/sample/sample.cu", line 27
/*0170*/          ERBBAR ;
/*0180*/          EXIT ;
.L_3:
/*0190*/          BRA `(.L_3);
.L_4:
```

`nvdiasm` is capable of showing line number information with additional function inlining info (if any). In absence of any function inlining the output is same as the one with `nvdiasm -g` command.

Here's a sample output of a kernel using `nvdiasm -gi` command:

```
//----- .text._Z6kernali -----
.section      .text._Z6kernali,"ax",@progbits
.sectioninfo  @"SHI_REGISTERS=16"
.align       128
.global      _Z6kernali
.type        _Z6kernali,@function
.size        _Z6kernali,(.L_18 - _Z6kernali)
.other       _Z6kernali,@"STO_CUDA_ENTRY STV_DEFAULT"
_Z6kernali:
.text._Z6kernali:
/*0000*/          IMAD.MOV.U32 R1, RZ, RZ, c[0x0][0x28] ;
//## File "/home/user/cuda/inline.cu", line 17 inlined at "/home/user/cuda/inline.cu", line 23
//## File "/home/user/cuda/inline.cu", line 23
/*0010*/          UMOV UR4, 32@lo(arr) ;
/*0020*/          UMOV UR5, 32@hi(arr) ;
/*0030*/          IMAD.U32 R2, RZ, RZ, UR4 ;
/*0040*/          MOV R3, UR5 ;
/*0050*/          ULDC.64 UR4, c[0x0][0x118] ;
```

```

#### File "/home/user/cuda/inline.cu", line 10 inlined at "/home/user/cuda/inline.cu", line 17
#### File "/home/user/cuda/inline.cu", line 17 inlined at "/home/user/cuda/inline.cu", line 23
#### File "/home/user/cuda/inline.cu", line 23
/*0060*/          LDG.E R4, [R2.64] ;
/*0070*/          LDG.E R5, [R2.64+0x4] ;
#### File "/home/user/cuda/inline.cu", line 17 inlined at "/home/user/cuda/inline.cu", line 23
#### File "/home/user/cuda/inline.cu", line 23
/*0080*/          LDG.E R0, [R2.64+0x8] ;
#### File "/home/user/cuda/inline.cu", line 23
/*0090*/          UMOV UR6, 32@lo(ans) ;
/*00a0*/          UMOV UR7, 32@hi(ans) ;
#### File "/home/user/cuda/inline.cu", line 10 inlined at "/home/user/cuda/inline.cu", line 17
#### File "/home/user/cuda/inline.cu", line 17 inlined at "/home/user/cuda/inline.cu", line 23
#### File "/home/user/cuda/inline.cu", line 23
/*00b0*/          IADD3 R7, R4, c[0x0][0x160], RZ ;
#### File "/home/user/cuda/inline.cu", line 23
/*00c0*/          IMAD.U32 R4, RZ, UR6 ;
#### File "/home/user/cuda/inline.cu", line 10 inlined at "/home/user/cuda/inline.cu", line 17
#### File "/home/user/cuda/inline.cu", line 17 inlined at "/home/user/cuda/inline.cu", line 23
#### File "/home/user/cuda/inline.cu", line 23
/*00d0*/          IADD3 R9, R5, c[0x0][0x160], RZ ;
#### File "/home/user/cuda/inline.cu", line 23
/*00e0*/          MOV R5, UR7 ;
#### File "/home/user/cuda/inline.cu", line 10 inlined at "/home/user/cuda/inline.cu", line 17
#### File "/home/user/cuda/inline.cu", line 17 inlined at "/home/user/cuda/inline.cu", line 23
#### File "/home/user/cuda/inline.cu", line 23
/*00f0*/          IADD3 R11, R0.reuse, c[0x0][0x160], RZ ;
#### File "/home/user/cuda/inline.cu", line 17 inlined at "/home/user/cuda/inline.cu", line 23
#### File "/home/user/cuda/inline.cu", line 23
/*0100*/          IMAD.IADD R13, R0, 0x1, R7 ;
#### File "/home/user/cuda/inline.cu", line 10 inlined at "/home/user/cuda/inline.cu", line 17
#### File "/home/user/cuda/inline.cu", line 17 inlined at "/home/user/cuda/inline.cu", line 23
#### File "/home/user/cuda/inline.cu", line 23
/*0110*/          STG.E [R2.64+0x4], R9 ;
/*0120*/          STG.E [R2.64], R7 ;
/*0130*/          STG.E [R2.64+0x8], R11 ;
#### File "/home/user/cuda/inline.cu", line 23
/*0140*/          STG.E [R4.64], R13 ;
#### File "/home/user/cuda/inline.cu", line 24
/*0150*/          EXIT ;
.L_3:          /*0160*/          BRA `(.L_3);
.L_18:

```

3.2. Command-line Options

[Table 3](#) contains the supported command-line options of `nvdiasm`, along with a description of what each option does. Each option has a long name and a short name, which can be used interchangeably.

Table 3. `nvdiasm` Command-line Options

Option (long)	Option (short)	Description
<code>--base-address <value></code>	<code>-base</code>	Specify the logical base address of the image to disassemble. This option is only valid when disassembling a raw instruction binary (see option <code>'--binary'</code>), and is ignored when disassembling an Elf file. Default value: 0.
<code>--binary <SMxy></code>	<code>-b</code>	When this option is specified, the input file is assumed to contain a raw instruction binary, that is, a sequence of binary instruction encodings

Option (long)	Option (short)	Description
		as they occur in instruction memory. The value of this option must be the asserted architecture of the raw binary. Allowed values for this option: 'SM50', 'SM52', 'SM53', 'SM60', 'SM61', 'SM62', 'SM70', 'SM72', 'SM75', 'SM80', 'SM86', 'SM87', 'SM89', 'SM90'.
<code>--cuda-function-index <symbol index>,...</code>	<code>-fun</code>	Restrict the output to the CUDA functions represented by symbols with the given indices. The CUDA function for a given symbol is the enclosing section. This only restricts executable sections; all other sections will still be printed.
<code>--help</code>	<code>-h</code>	Print this help information on this tool.
<code>--life-range-mode</code>	<code>-lrm</code>	This option implies option ' <code>--print-life-ranges</code> ', and determines how register live range info should be printed. 'count': Not at all, leaving only the # column (number of live registers); 'wide': Columns spaced out for readability (default); 'narrow': A one-character column for each register, economizing on table width. Allowed values for this option: 'count', 'narrow', 'wide'.
<code>--no-dataflow</code>	<code>-ndf</code>	Disable dataflow analyzer after disassembly. Dataflow analysis is normally enabled to perform branch stack analysis and annotate all instructions that jump via the GPU branch stack with inferred branch target labels. However, it may occasionally fail when certain restrictions on the input nvelv/cubin are not met.
<code>--no-vliw</code>	<code>-novliw</code>	Conventional mode; disassemble paired instructions in normal syntax, instead of VLIW syntax.
<code>--options-file <file>,...</code>	<code>-optf</code>	Include command line options from specified file.
<code>--output-control-flow-graph</code>	<code>-cfg</code>	When specified, output the control flow graph where each node is a hyperblock, in a format consumable by graphviz tools (such as dot). Example use briefed in Control flow graph information .
<code>--output-control-flow-graph-with-basic-blocks</code>	<code>-bbcfcg</code>	When specified, output the control flow graph where each node is a basicblock, in a format consumable by graphviz tools (such as dot). Example use briefed in Control flow graph information .
<code>--print-code</code>	<code>-c</code>	Only print code sections.
<code>--print-instr-offsets-cfg</code>	<code>-poff</code>	When specified, print instruction offsets in the control flow graph. This should be used along with the option <code>--output-control-flow-graph</code> or <code>--output-control-flow-graph-with-basic-blocks</code> .
<code>--print-instruction-encoding</code>	<code>-hex</code>	When specified, print the encoding bytes after each disassembled operation.

Option (long)	Option (short)	Description
<code>--print-life-ranges</code>	<code>-plr</code>	Print register life range information in a trailing column in the produced disassembly. Example use briefed in Register liveness information .
<code>--print-line-info</code>	<code>-g</code>	Annotate disassembly with source line information obtained from <code>.debug_line</code> section, if present. Example use briefed in Debug information .
<code>--print-line-info-inline</code>	<code>-gi</code>	Annotate disassembly with source line information obtained from <code>.debug_line</code> section along with function inlining info, if present. Example use briefed in Debug information
<code>--print-line-info-ptx</code>	<code>-gp</code>	Annotate disassembly with source line information obtained from <code>.nv_debug_line_sass</code> section, if present.
<code>--print-raw</code>	<code>-raw</code>	Print the disassembly without any attempt to beautify it.
<code>--separate-functions</code>	<code>-sf</code>	Separate the code corresponding with function symbols by some new lines to let them stand out in the printed disassembly.
<code>--version</code>	<code>-v</code>	Print version information on this tool.

Chapter 4. Instruction Set Reference

This is an instruction set reference for NVIDIA® GPU architectures.

4.1. Maxwell and Pascal Instruction Set

The Maxwell (Compute Capability 5.x) and the Pascal (Compute Capability 6.x) architectures have the following instruction set format:

```
(instruction) (destination) (source1), (source2) ...
```

Valid destination and source locations include:

- ▶ RX for registers
- ▶ SRX for special system-controlled registers
- ▶ PX for condition registers
- ▶ c[X][Y] for constant memory

[Table 4](#) lists valid instructions for the Maxwell and Pascal GPUs.

Table 4. Maxwell and Pascal Instruction Set

Opcode	Description
Floating Point Instructions	
FADD	FP32 Add
FCHK	Single Precision FP Divide Range Check
FCMP	FP32 Compare to Zero and Select Source
FFMA	FP32 Fused Multiply and Add
FMNMX	FP32 Minimum/Maximum
FMUL	FP32 Multiply
FSET	FP32 Compare And Set
FSETP	FP32 Compare And Set Predicate
FSWZADD	FP32 Add used for FSWZ emulation

Opcode	Description
MUFU	Multi Function Operation
RRO	Range Reduction Operator FP
DADD	FP64 Add
DFMA	FP64 Fused Mutipty Add
DMNMX	FP64 Minimum/Maximum
DMUL	FP64 Multiply
DSET	FP64 Compare And Set
DSETP	FP64 Compare And Set Predicate
HADD2	FP16 Add
HFMA2	FP16 Fused Mutipty Add
HMUL2	FP16 Multiply
HSET2	FP16 Compare And Set
HSETP2	FP16 Compare And Set Predicate
Integer Instructions	
BFE	Bit Field Extract
BFI	Bit Field Insert
FLO	Find Leading One
IADD	Integer Addition
IADD3	3-input Integer Addition
ICMP	Integer Compare to Zero and Select Source
IMAD	Integer Multiply And Add
IMADSP	Extracted Integer Multiply And Add.
IMNMX	Integer Minimum/Maximum
IMUL	Integer Multiply
ISCADD	Scaled Integer Addition
ISET	Integer Compare And Set
ISETP	Integer Compare And Set Predicate
LEA	Compute Effective Address
LOP	Logic Operation
LOP3	3-input Logic Operation
POPC	Population count
SHF	Funnel Shift
SHL	Shift Left
SHR	Shift Right
XMAD	Integer Short Multiply Add
Conversion Instructions	
F2F	Floating Point To Floating Point Conversion
F2I	Floating Point To Integer Conversion

Opcode	Description
I2F	Integer To Floating Point Conversion
I2I	Integer To Integer Conversion
Movement Instructions	
MOV	Move
PRMT	Permute Register Pair
SEL	Select Source with Predicate
SHFL	Warp Wide Register Shuffle
Predicate/CC Instructions	
CSET	Test Condition Code And Set
CSETP	Test Condition Code and Set Predicate
PSET	Combine Predicates and Set
PSETP	Combine Predicates and Set Predicate
P2R	Move Predicate Register To Register
R2P	Move Register To Predicate/CC Register
Texture Instructions	
TEX	Texture Fetch
TLD	Texture Load
TLD4	Texture Load 4
TXQ	Texture Query
TEXS	Texture Fetch with scalar/non-vec4 source/destinations
TLD4S	Texture Load 4 with scalar/non-vec4 source/destinations
TLDS	Texture Load with scalar/non-vec4 source/destinations
Compute Load/Store Instructions	
LD	Load from generic Memory
LDC	Load Constant
LDG	Load from Global Memory
LDL	Load within Local Memory Window
LDS	Local within Shared Memory Window
ST	Store to generic Memory
STG	Store to global Memory
STL	Store within Local or Shared Window
STS	Store within Local or Shared Window
ATOM	Atomic Operation on generic Memory
ATOMS	Atomic Operation on Shared Memory
RED	Reduction Operation on generic Memory
CCTL	Cache Control
CCTLL	Cache Control
MEMBAR	Memory Barrier

Opcode	Description
CCTLT	Texture Cache Control
Surface Memory Instructions	
SUATOM	Atomic Op on Surface Memory
SULD	Surface Load
SURED	Reduction Op on Surface Memory
SUST	Surface Store
Control Instructions	
BRA	Relative Branch
BRX	Relative Branch Indirect
JMP	Absolute Jump
JMX	Absolute Jump Indirect
SSY	Set Synchronization Point
SYNC	Converge threads after conditional branch
CAL	Relative Call
JCAL	Absolute Call
PRET	Pre-Return From Subroutine
RET	Return From Subroutine
BRK	Break
PBK	Pre-Break
CONT	Continue
PCNT	Pre-continue
EXIT	Exit Program
PEXIT	Pre-Exit
BPT	BreakPoint/Trap
Miscellaneous Instructions	
NOP	No Operation
CS2R	Move Special Register to Register
S2R	Move Special Register to Register
B2R	Move Barrier To Register
BAR	Barrier Synchronization
VOTE	Vote Across SIMD Thread Group

4.2. Volta Instruction Set

The Volta architecture (Compute Capability 7.x) has the following instruction set format:

```
(instruction) (destination) (source1), (source2) ...
```

Valid destination and source locations include:

- ▶ RX for registers
- ▶ SRX for special system-controlled registers
- ▶ PX for predicate registers
- ▶ c[X][Y] for constant memory

[Table 5](#) lists valid instructions for the Volta GPUs.

Table 5. Volta Instruction Set

Opcode	Description
Floating Point Instructions	
FADD	FP32 Add
FADD32I	FP32 Add
FCHK	Floating-point Range Check
FFMA32I	FP32 Fused Multiply and Add
FFMA	FP32 Fused Multiply and Add
FMNMX	FP32 Minimum/Maximum
FMUL	FP32 Multiply
FMUL32I	FP32 Multiply
FSEL	Floating Point Select
FSET	FP32 Compare And Set
FSETP	FP32 Compare And Set Predicate
FSWZADD	FP32 Swizzle Add
MUFU	FP32 Multi Function Operation
HADD2	FP16 Add
HADD2_32I	FP16 Add
HFMA2	FP16 Fused Mutipty Add
HFMA2_32I	FP16 Fused Mutipty Add
HMMA	Matrix Multiply and Accumulate
HMUL2	FP16 Multiply
HMUL2_32I	FP16 Multiply
HSET2	FP16 Compare And Set
HSETP2	FP16 Compare And Set Predicate
DADD	FP64 Add
DFMA	FP64 Fused Mutipty Add
DMUL	FP64 Multiply
DSETP	FP64 Compare And Set Predicate
Integer Instructions	
BMSK	Bitfield Mask

Opcode	Description
BREV	Bit Reverse
FLO	Find Leading One
IABS	Integer Absolute Value
IADD	Integer Addition
IADD3	3-input Integer Addition
IADD32I	Integer Addition
IDP	Integer Dot Product and Accumulate
IDP4A	Integer Dot Product and Accumulate
IMAD	Integer Multiply And Add
IMMA	Integer Matrix Multiply and Accumulate
IMNMX	Integer Minimum/Maximum
IMUL	Integer Multiply
IMUL32I	Integer Multiply
ISCADD	Scaled Integer Addition
ISCADD32I	Scaled Integer Addition
ISETP	Integer Compare And Set Predicate
LEA	LOAD Effective Address
LOP	Logic Operation
LOP3	Logic Operation
LOP32I	Logic Operation
POPC	Population count
SHF	Funnel Shift
SHL	Shift Left
SHR	Shift Right
VABSDIFF	Absolute Difference
VABSDIFF4	Absolute Difference
Conversion Instructions	
F2F	Floating Point To Floating Point Conversion
F2I	Floating Point To Integer Conversion
I2F	Integer To Floating Point Conversion
I2I	Integer To Integer Conversion
I2IP	Integer To Integer Conversion and Packing
FRND	Round To Integer
Movement Instructions	
MOV	Move
MOV32I	Move
PRMT	Permute Register Pair
SEL	Select Source with Predicate

Opcode	Description
SGXT	Sign Extend
SHFL	Warp Wide Register Shuffle
Predicate Instructions	
PLOP3	Predicate Logic Operation
PSETP	Combine Predicates and Set Predicate
P2R	Move Predicate Register To Register
R2P	Move Register To Predicate Register
Load/Store Instructions	
LD	Load from generic Memory
LDC	Load Constant
LDG	Load from Global Memory
LDL	Load within Local Memory Window
LDS	Load within Shared Memory Window
ST	Store to Generic Memory
STG	Store to Global Memory
STL	Store within Local or Shared Window
STS	Store within Local or Shared Window
MATCH	Match Register Values Across Thread Group
QSPC	Query Space
ATOM	Atomic Operation on Generic Memory
ATOMS	Atomic Operation on Shared Memory
ATOMG	Atomic Operation on Global Memory
RED	Reduction Operation on Generic Memory
CCTL	Cache Control
CCTLL	Cache Control
ERRBAR	Error Barrier
MEMBAR	Memory Barrier
CCTLT	Texture Cache Control
Texture Instructions	
TEX	Texture Fetch
TLD	Texture Load
TLD4	Texture Load 4
TMML	Texture MipMap Level
TXD	Texture Fetch With Derivatives
TXQ	Texture Query
Surface Instructions	
SUATOM	Atomic Op on Surface Memory
SULD	Surface Load

Opcode	Description
SURED	Reduction Op on Surface Memory
SUST	Surface Store
Control Instructions	
BMOV	Move Convergence Barrier State
BPT	BreakPoint/Trap
BRA	Relative Branch
BREAK	Break out of the Specified Convergence Barrier
BRX	Relative Branch Indirect
BSSY	Barrier Set Convergence Synchronization Point
BSYNC	Synchronize Threads on a Convergence Barrier
CALL	Call Function
EXIT	Exit Program
JMP	Absolute Jump
JMX	Absolute Jump Indirect
KILL	Kill Thread
NANOSLEEP	Suspend Execution
RET	Return From Subroutine
RPCMOV	PC Register Move
WARPSYNC	Synchronize Threads in Warp
YIELD	Yield Control
Miscellaneous Instructions	
B2R	Move Barrier To Register
BAR	Barrier Synchronization
CS2R	Move Special Register to Register
DEPBAR	Dependency Barrier
GETLMEMBASE	Get Local Memory Base Address
LEPC	Load Effective PC
NOP	No Operation
PMTRIG	Performance Monitor Trigger
S2R	Move Special Register to Register
SETCTAID	Set CTA ID
SETLMEMBASE	Set Local Memory Base Address
VOTE	Vote Across SIMD Thread Group

4.3. Turing Instruction Set

The Turing architecture (Compute Capability 7.5) has the following instruction set format:

```
(instruction) (destination) (source1), (source2) ...
```

Valid destination and source locations include:

- ▶ RX for registers
- ▶ URX for uniform registers
- ▶ SRX for special system-controlled registers
- ▶ PX for predicate registers
- ▶ UPX for uniform predicate registers
- ▶ c[X][Y] for constant memory

[Table 6](#) lists valid instructions for the Turing GPUs.

Table 6. Turing Instruction Set

Opcode	Description
Floating Point Instructions	
FADD	FP32 Add
FADD32I	FP32 Add
FCHK	Floating-point Range Check
FFMA32I	FP32 Fused Multiply and Add
FFMA	FP32 Fused Multiply and Add
FMNMX	FP32 Minimum/Maximum
FMUL	FP32 Multiply
FMUL32I	FP32 Multiply
FSEL	Floating Point Select
FSET	FP32 Compare And Set
FSETP	FP32 Compare And Set Predicate
FSWZADD	FP32 Swizzle Add
MUFU	FP32 Multi Function Operation
HADD2	FP16 Add
HADD2_32I	FP16 Add
HFMA2	FP16 Fused Mutiply Add
HFMA2_32I	FP16 Fused Mutiply Add
HMMA	Matrix Multiply and Accumulate
HMUL2	FP16 Multiply
HMUL2_32I	FP16 Multiply
HSET2	FP16 Compare And Set
HSETP2	FP16 Compare And Set Predicate

Opcode	Description
DADD	FP64 Add
DFMA	FP64 Fused Mutipty Add
DMUL	FP64 Multiply
DSETP	FP64 Compare And Set Predicate
Integer Instructions	
BMMA	Bit Matrix Multiply and Accumulate
BMSK	Bitfield Mask
BREV	Bit Reverse
FLO	Find Leading One
IABS	Integer Absolute Value
IADD	Integer Addition
IADD3	3-input Integer Addition
IADD32I	Integer Addition
IDP	Integer Dot Product and Accumulate
IDP4A	Integer Dot Product and Accumulate
IMAD	Integer Multiply And Add
IMMA	Integer Matrix Multiply and Accumulate
IMNMX	Integer Minimum/Maximum
IMUL	Integer Multiply
IMUL32I	Integer Multiply
ISCADD	Scaled Integer Addition
ISCADD32I	Scaled Integer Addition
ISETP	Integer Compare And Set Predicate
LEA	LOAD Effective Address
LOP	Logic Operation
LOP3	Logic Operation
LOP32I	Logic Operation
POPC	Population count
SHF	Funnel Shift
SHL	Shift Left
SHR	Shift Right
VABSDIFF	Absolute Difference
VABSDIFF4	Absolute Difference
Conversion Instructions	
F2F	Floating Point To Floating Point Conversion
F2I	Floating Point To Integer Conversion
I2F	Integer To Floating Point Conversion
I2I	Integer To Integer Conversion

Opcode	Description
I2IP	Integer To Integer Conversion and Packing
FRND	Round To Integer
Movement Instructions	
MOV	Move
MOV32I	Move
MOVM	Move Matrix with Transposition or Expansion
PRMT	Permute Register Pair
SEL	Select Source with Predicate
SGXT	Sign Extend
SHFL	Warp Wide Register Shuffle
Predicate Instructions	
PLOP3	Predicate Logic Operation
PSETP	Combine Predicates and Set Predicate
P2R	Move Predicate Register To Register
R2P	Move Register To Predicate Register
Load/Store Instructions	
LD	Load from generic Memory
LDC	Load Constant
LDG	Load from Global Memory
LDL	Load within Local Memory Window
LDS	Load within Shared Memory Window
LDSM	Load Matrix from Shared Memory with Element Size Expansion
ST	Store to Generic Memory
STG	Store to Global Memory
STL	Store within Local or Shared Window
STS	Store within Local or Shared Window
MATCH	Match Register Values Across Thread Group
QSPC	Query Space
ATOM	Atomic Operation on Generic Memory
ATOMS	Atomic Operation on Shared Memory
ATOMG	Atomic Operation on Global Memory
RED	Reduction Operation on Generic Memory
CCTL	Cache Control
CCTLL	Cache Control
ERRBAR	Error Barrier
MEMBAR	Memory Barrier
CCTLT	Texture Cache Control
Uniform Datapath Instructions	

Opcode	Description
R2UR	Move from Vector Register to a Uniform Register
S2UR	Move Special Register to Uniform Register
UBMSK	Uniform Bitfield Mask
UBREV	Uniform Bit Reverse
UCLEA	Load Effective Address for a Constant
UFLO	Uniform Find Leading One
UIADD3	Uniform Integer Addition
UIADD3.64	Uniform Integer Addition
UIMAD	Uniform Integer Multiplication
UISETP	Integer Compare and Set Uniform Predicate
ULDC	Load from Constant Memory into a Uniform Register
ULEA	Uniform Load Effective Address
ULOP	Logic Operation
ULOP3	Logic Operation
ULOP32I	Logic Operation
UMOV	Uniform Move
UP2UR	Uniform Predicate to Uniform Register
UPLOP3	Uniform Predicate Logic Operation
UPOPC	Uniform Population Count
UPRMT	Uniform Byte Permute
UPSETP	Uniform Predicate Logic Operation
UR2UP	Uniform Register to Uniform Predicate
USEL	Uniform Select
USGXT	Uniform Sign Extend
USHF	Uniform Funnel Shift
USHL	Uniform Left Shift
USHR	Uniform Right Shift
VOTEU	Voting across SIMD Thread Group with Results in Uniform Destination
Texture Instructions	
TEX	Texture Fetch
TLD	Texture Load
TLD4	Texture Load 4
TMML	Texture MipMap Level
TXD	Texture Fetch With Derivatives
TXQ	Texture Query
Surface Instructions	
SUATOM	Atomic Op on Surface Memory

Opcode	Description
SULD	Surface Load
SURED	Reduction Op on Surface Memory
SUST	Surface Store
Control Instructions	
BMOV	Move Convergence Barrier State
BPT	BreakPoint/Trap
BRA	Relative Branch
BREAK	Break out of the Specified Convergence Barrier
BRX	Relative Branch Indirect
BRXU	Relative Branch with Uniform Register Based Offset
BSSY	Barrier Set Convergence Synchronization Point
BSYNC	Synchronize Threads on a Convergence Barrier
CALL	Call Function
EXIT	Exit Program
JMP	Absolute Jump
JMX	Absolute Jump Indirect
JMXU	Absolute Jump with Uniform Register Based Offset
KILL	Kill Thread
NANOSLEEP	Suspend Execution
RET	Return From Subroutine
RPCMOV	PC Register Move
WARPSYNC	Synchronize Threads in Warp
YIELD	Yield Control
Miscellaneous Instructions	
B2R	Move Barrier To Register
BAR	Barrier Synchronization
CS2R	Move Special Register to Register
DEPBAR	Dependency Barrier
GETLMEMBASE	Get Local Memory Base Address
LEPC	Load Effective PC
NOP	No Operation
PMTRIG	Performance Monitor Trigger
S2R	Move Special Register to Register
SETCTAID	Set CTA ID
SETLMEMBASE	Set Local Memory Base Address
VOTE	Vote Across SIMD Thread Group

4.4. Ampere and Ada Instruction Set

The Ampere and Ada architectures (Compute Capability 8.x) have the following instruction set format:

```
(instruction) (destination) (source1), (source2) ...
```

Valid destination and source locations include:

- ▶ RX for registers
- ▶ URX for uniform registers
- ▶ SRX for special system-controlled registers
- ▶ PX for predicate registers
- ▶ UPX for uniform predicate registers
- ▶ c[X][Y] for constant memory

[Table 7](#) lists valid instructions for the Ampere and Ada GPUs.

Table 7. Ampere and Ada Instruction Set

Opcode	Description
Floating Point Instructions	
FADD	FP32 Add
FADD32I	FP32 Add
FCHK	Floating-point Range Check
FFMA32I	FP32 Fused Multiply and Add
FFMA	FP32 Fused Multiply and Add
FMNMX	FP32 Minimum/Maximum
FMUL	FP32 Multiply
FMUL32I	FP32 Multiply
FSEL	Floating Point Select
FSET	FP32 Compare And Set
FSETP	FP32 Compare And Set Predicate
FSWZADD	FP32 Swizzle Add
MUFU	FP32 Multi Function Operation
HADD2	FP16 Add
HADD2_32I	FP16 Add
HFMA2	FP16 Fused Mutipty Add
HFMA2_32I	FP16 Fused Mutipty Add

Opcode	Description
HMMA	Matrix Multiply and Accumulate
HNMNMX2	FP16 Minimum / Maximum
HMUL2	FP16 Multiply
HMUL2_32I	FP16 Multiply
HSET2	FP16 Compare And Set
HSETP2	FP16 Compare And Set Predicate
DADD	FP64 Add
DFMA	FP64 Fused Mutipty Add
DMMA	Matrix Multiply and Accumulate
DMUL	FP64 Multiply
DSETP	FP64 Compare And Set Predicate
Integer Instructions	
BMMA	Bit Matrix Multiply and Accumulate
BMSK	Bitfield Mask
BREV	Bit Reverse
FLO	Find Leading One
IABS	Integer Absolute Value
IADD	Integer Addition
IADD3	3-input Integer Addition
IADD32I	Integer Addition
IDP	Integer Dot Product and Accumulate
IDP4A	Integer Dot Product and Accumulate
IMAD	Integer Multiply And Add
IMMA	Integer Matrix Multiply and Accumulate
IMNMX	Integer Minimum/Maximum
IMUL	Integer Multiply
IMUL32I	Integer Multiply
ISCADD	Scaled Integer Addition
ISCADD32I	Scaled Integer Addition
ISETP	Integer Compare And Set Predicate
LEA	LOAD Effective Address
LOP	Logic Operation
LOP3	Logic Operation
LOP32I	Logic Operation
POPC	Population count
SHF	Funnel Shift
SHL	Shift Left
SHR	Shift Right

Opcode	Description
VABSDIFF	Absolute Difference
VABSDIFF4	Absolute Difference
Conversion Instructions	
F2F	Floating Point To Floating Point Conversion
F2I	Floating Point To Integer Conversion
I2F	Integer To Floating Point Conversion
I2I	Integer To Integer Conversion
I2IP	Integer To Integer Conversion and Packing
I2FP	Integer to FP32 Convert and Pack
F2IP	FP32 Down-Convert to Integer and Pack
FRND	Round To Integer
Movement Instructions	
MOV	Move
MOV32I	Move
MOVM	Move Matrix with Transposition or Expansion
PRMT	Permute Register Pair
SEL	Select Source with Predicate
SGXT	Sign Extend
SHFL	Warp Wide Register Shuffle
Predicate Instructions	
PLOP3	Predicate Logic Operation
PSETP	Combine Predicates and Set Predicate
P2R	Move Predicate Register To Register
R2P	Move Register To Predicate Register
Load/Store Instructions	
LD	Load from generic Memory
LDC	Load Constant
LDG	Load from Global Memory
LDGDEPBAR	Global Load Dependency Barrier
LDGSTS	Asynchronous Global to Shared Memcopy
LDL	Load within Local Memory Window
LDS	Load within Shared Memory Window
LDSM	Load Matrix from Shared Memory with Element Size Expansion
ST	Store to Generic Memory
STG	Store to Global Memory
STL	Store within Local or Shared Window
STS	Store within Local or Shared Window
MATCH	Match Register Values Across Thread Group

Opcode	Description
QSPC	Query Space
ATOM	Atomic Operation on Generic Memory
ATOMS	Atomic Operation on Shared Memory
ATOMG	Atomic Operation on Global Memory
RED	Reduction Operation on Generic Memory
CCTL	Cache Control
CCTLL	Cache Control
ERRBAR	Error Barrier
MEMBAR	Memory Barrier
CCTLT	Texture Cache Control
Uniform Datapath Instructions	
R2UR	Move from Vector Register to a Uniform Register
REDUX	Reduction of a Vector Register into a Uniform Register
S2UR	Move Special Register to Uniform Register
UBMSK	Uniform Bitfield Mask
UBREV	Uniform Bit Reverse
UCLEA	Load Effective Address for a Constant
UF2FP	Uniform FP32 Down-convert and Pack
UFLO	Uniform Find Leading One
UIADD3	Uniform Integer Addition
UIADD3.64	Uniform Integer Addition
UIMAD	Uniform Integer Multiplication
UISETP	Integer Compare and Set Uniform Predicate
ULDC	Load from Constant Memory into a Uniform Register
ULEA	Uniform Load Effective Address
ULOP	Logic Operation
ULOP3	Logic Operation
ULOP32I	Logic Operation
UMOV	Uniform Move
UP2UR	Uniform Predicate to Uniform Register
UPLOP3	Uniform Predicate Logic Operation
UPOPC	Uniform Population Count
UPRMT	Uniform Byte Permute
UPSETP	Uniform Predicate Logic Operation
UR2UP	Uniform Register to Uniform Predicate
USEL	Uniform Select
USGXT	Uniform Sign Extend
USHF	Uniform Funnel Shift

Opcode	Description
USHL	Uniform Left Shift
USHR	Uniform Right Shift
VOTEU	Voting across SIMD Thread Group with Results in Uniform Destination
Texture Instructions	
TEX	Texture Fetch
TLD	Texture Load
TLD4	Texture Load 4
TMML	Texture MipMap Level
TXD	Texture Fetch With Derivatives
TXQ	Texture Query
Surface Instructions	
SUATOM	Atomic Op on Surface Memory
SULD	Surface Load
SURED	Reduction Op on Surface Memory
SUST	Surface Store
Control Instructions	
BMOV	Move Convergence Barrier State
BPT	BreakPoint/Trap
BRA	Relative Branch
BREAK	Break out of the Specified Convergence Barrier
BRX	Relative Branch Indirect
BRXU	Relative Branch with Uniform Register Based Offset
BSSY	Barrier Set Convergence Synchronization Point
BSYNC	Synchronize Threads on a Convergence Barrier
CALL	Call Function
EXIT	Exit Program
JMP	Absolute Jump
JMX	Absolute Jump Indirect
JMXU	Absolute Jump with Uniform Register Based Offset
KILL	Kill Thread
NANOSLEEP	Suspend Execution
RET	Return From Subroutine
RPCMOV	PC Register Move
WARPSYNC	Synchronize Threads in Warp
YIELD	Yield Control
Miscellaneous Instructions	
B2R	Move Barrier To Register

Opcode	Description
BAR	Barrier Synchronization
CS2R	Move Special Register to Register
DEPBAR	Dependency Barrier
GETLMEMBASE	Get Local Memory Base Address
LEPC	Load Effective PC
NOP	No Operation
PMTRIG	Performance Monitor Trigger
S2R	Move Special Register to Register
SETCTAID	Set CTA ID
SETLMEMBASE	Set Local Memory Base Address
VOTE	Vote Across SIMD Thread Group

4.5. Hopper Instruction Set

The Hopper architecture (Compute Capability 9.0) has the following instruction set format:

```
(instruction) (destination) (source1), (source2) ...
```

Valid destination and source locations include:

- ▶ RX for registers
- ▶ URX for uniform registers
- ▶ SRX for special system-controlled registers
- ▶ PX for predicate registers
- ▶ UPX for uniform predicate registers
- ▶ c[X][Y] for constant memory
- ▶ desc[URX][RY] for memory descriptors

[Table 8](#) lists valid instructions for the Hopper GPUs.

Table 8. Hopper Instruction Set

Opcode	Description
Floating Point Instructions	
FADD	FP32 Add
FADD32I	FP32 Add
FCHK	Floating-point Range Check
FFMA32I	FP32 Fused Multiply and Add

Opcode	Description
FFMA	FP32 Fused Multiply and Add
FMNMX	FP32 Minimum/Maximum
FMUL	FP32 Multiply
FMUL32I	FP32 Multiply
FSEL	Floating Point Select
FSET	FP32 Compare And Set
FSETP	FP32 Compare And Set Predicate
FSWZADD	FP32 Swizzle Add
MUFU	FP32 Multi Function Operation
HADD2	FP16 Add
HADD2_32I	FP16 Add
HFMA2	FP16 Fused Mutiply Add
HFMA2_32I	FP16 Fused Mutiply Add
HMMA	Matrix Multiply and Accumulate
HMNMX2	FP16 Minimum / Maximum
HMUL2	FP16 Multiply
HMUL2_32I	FP16 Multiply
HSET2	FP16 Compare And Set
HSETP2	FP16 Compare And Set Predicate
DADD	FP64 Add
DFMA	FP64 Fused Mutiply Add
DMMA	Matrix Multiply and Accumulate
DMUL	FP64 Multiply
DSETP	FP64 Compare And Set Predicate
Integer Instructions	
BMMA	Bit Matrix Multiply and Accumulate
BMSK	Bitfield Mask
BREV	Bit Reverse
FLO	Find Leading One
IABS	Integer Absolute Value
IADD	Integer Addition
IADD3	3-input Integer Addition
IADD32I	Integer Addition
IDP	Integer Dot Product and Accumulate
IDP4A	Integer Dot Product and Accumulate
IMAD	Integer Multiply And Add
IMMA	Integer Matrix Multiply and Accumulate
IMNMX	Integer Minimum/Maximum

Opcode	Description
IMUL	Integer Multiply
IMUL32I	Integer Multiply
ISCADD	Scaled Integer Addition
ISCADD32I	Scaled Integer Addition
ISETP	Integer Compare And Set Predicate
LEA	LOAD Effective Address
LOP	Logic Operation
LOP3	Logic Operation
LOP32I	Logic Operation
POPC	Population count
SHF	Funnel Shift
SHL	Shift Left
SHR	Shift Right
VABSDIFF	Absolute Difference
VABSDIFF4	Absolute Difference
VHMNMX	SIMD FP16 3-Input Minimum / Maximum
VIADD	SIMD Integer Addition
VIADDMNMX	SIMD Integer Addition and Fused Min/Max Comparison
VIMNMX	SIMD Integer Minimum / Maximum
VIMNMX3	SIMD Integer 3-Input Minimum / Maximum
Conversion Instructions	
F2F	Floating Point To Floating Point Conversion
F2I	Floating Point To Integer Conversion
I2F	Integer To Floating Point Conversion
I2I	Integer To Integer Conversion
I2IP	Integer To Integer Conversion and Packing
I2FP	Integer to FP32 Convert and Pack
F2IP	FP32 Down-Convert to Integer and Pack
FRND	Round To Integer
Movement Instructions	
MOV	Move
MOV32I	Move
MOVMM	Move Matrix with Transposition or Expansion
PRMT	Permute Register Pair
SEL	Select Source with Predicate
SGXT	Sign Extend
SHFL	Warp Wide Register Shuffle
Predicate Instructions	

Opcode	Description
PLOP3	Predicate Logic Operation
PSETP	Combine Predicates and Set Predicate
P2R	Move Predicate Register To Register
R2P	Move Register To Predicate Register
Load/Store Instructions	
FENCE	Memory Visibility Guarantee for Shared or Global Memory
LD	Load from generic Memory
LDC	Load Constant
LDG	Load from Global Memory
LDGDEPBAR	Global Load Dependency Barrier
LDGSTS	Asynchronous Global to Shared Memcopy
LDL	Load within Local Memory Window
LDS	Load within Shared Memory Window
LDSM	Load Matrix from Shared Memory with Element Size Expansion
STSM	Store Matrix to Shared Memory
ST	Store to Generic Memory
STG	Store to Global Memory
STL	Store within Local or Shared Window
STS	Store within Local or Shared Window
SYNCS	Sync Unit
MATCH	Match Register Values Across Thread Group
QSPC	Query Space
ATOM	Atomic Operation on Generic Memory
ATOMS	Atomic Operation on Shared Memory
ATOMG	Atomic Operation on Global Memory
REDG	Reduction Operation on Generic Memory
CCTL	Cache Control
CCTL	Cache Control
ERRBAR	Error Barrier
MEMBAR	Memory Barrier
CCTLT	Texture Cache Control
Uniform Datapath Instructions	
R2UR	Move from Vector Register to a Uniform Register
REDUX	Reduction of a Vector Register into a Uniform Register
S2UR	Move Special Register to Uniform Register
UBMSK	Uniform Bitfield Mask
UBREV	Uniform Bit Reverse
UCGABAR_ARV	CGA Barrier Synchronization

Opcode	Description
UCGABAR_WAIT	CGA Barrier Synchronization
UCLEA	Load Effective Address for a Constant
UF2FP	Uniform FP32 Down-convert and Pack
UFLO	Uniform Find Leading One
UIADD3	Uniform Integer Addition
UIADD3.64	Uniform Integer Addition
UIMAD	Uniform Integer Multiplication
UISETP	Integer Compare and Set Uniform Predicate
ULDC	Load from Constant Memory into a Uniform Register
ULEA	Uniform Load Effective Address
ULEPC	Uniform Load Effective PC
ULOP	Logic Operation
ULOP3	Logic Operation
ULOP32I	Logic Operation
UMOV	Uniform Move
UP2UR	Uniform Predicate to Uniform Register
UPLOP3	Uniform Predicate Logic Operation
UPOPC	Uniform Population Count
UPRMT	Uniform Byte Permute
UPSETP	Uniform Predicate Logic Operation
UR2UP	Uniform Register to Uniform Predicate
USEL	Uniform Select
USETMAXREG	Release, Deallocate and Allocate Registers
USGXT	Uniform Sign Extend
USHF	Uniform Funnel Shift
USHL	Uniform Left Shift
USHR	Uniform Right Shift
VOTEU	Voting across SIMD Thread Group with Results in Uniform Destination
Warpgroup Instructions	
BGMMA	Bit Matrix Multiply and Accumulate Across Warps
HGMMA	Matrix Multiply and Accumulate Across a Warpgroup
IGMMA	Integer Matrix Multiply and Accumulate Across a Warpgroup
QGMMA	FP8 Matrix Multiply and Accumulate Across a Warpgroup
WARPGROUP	Warpgroup Synchronization
WARPGROUPSET	Set Warpgroup Counters
Tensor Memory Access Instructions	
UBLKCP	Bulk Data Copy

Opcode	Description
UBLKPF	Bulk Data Prefetch
UBLKRED	Bulk Data Copy from Shared Memory with Reduction
UTMACCTL	TMA Cache Control
UTMACMDFLUSH	TMA Command Flush
UTMALDG	Tensor Load from Global to Shared Memory
UTMAPF	Tensor Prefetch
UTMAREDG	Tensor Store from Shared to Global Memory with Reduction
UTMASTG	Tensor Store from Shared to Global Memory
Texture Instructions	
TEX	Texture Fetch
TLD	Texture Load
TLD4	Texture Load 4
TMML	Texture MipMap Level
TXD	Texture Fetch With Derivatives
TXQ	Texture Query
Surface Instructions	
SUATOM	Atomic Op on Surface Memory
SULD	Surface Load
SURED	Reduction Op on Surface Memory
SUST	Surface Store
Control Instructions	
ACQBULK	Wait for Bulk Release Status Warp State
BMOV	Move Convergence Barrier State
BPT	BreakPoint/Trap
BRA	Relative Branch
BREAK	Break out of the Specified Convergence Barrier
BRX	Relative Branch Indirect
BRXU	Relative Branch with Uniform Register Based Offset
BSSY	Barrier Set Convergence Synchronization Point
BSYNC	Synchronize Threads on a Convergence Barrier
CALL	Call Function
CGAERRBAR	CGA Error Barrier
ELECT	Elect a Leader Thread
ENDCOLLECTIVE	Reset the MCOLLECTIVE mask
EXIT	Exit Program
JMP	Absolute Jump
JMX	Absolute Jump Indirect
JMXU	Absolute Jump with Uniform Register Based Offset

Opcode	Description
KILL	Kill Thread
NANOSLEEP	Suspend Execution
PREEXIT	Dependent Task Launch Hint
RET	Return From Subroutine
RPCMOV	PC Register Move
WARPSYNC	Synchronize Threads in Warp
YIELD	Yield Control
Miscellaneous Instructions	
B2R	Move Barrier To Register
BAR	Barrier Synchronization
CS2R	Move Special Register to Register
DEPBAR	Dependency Barrier
GETLMEMBASE	Get Local Memory Base Address
LEPC	Load Effective PC
NOP	No Operation
PMTRIG	Performance Monitor Trigger
S2R	Move Special Register to Register
SETCTAID	Set CTA ID
SETLMEMBASE	Set Local Memory Base Address
VOTE	Vote Across SIMT Thread Group

Chapter 5. `cu++filt`

`cu++filt` decodes (demangles) low-level identifiers that have been mangled by CUDA C++ into user readable names. For every input alphanumeric word, the output of `cu++filt` is either the demangled name if the name decodes to a CUDA C++ name, or the original name itself.

5.1. Usage

`cu++filt` accepts one or more alphanumeric words (consisting of letters, digits, underscores, dollars, or periods) and attempts to decipher them. The basic usage is as following:

```
cu++filt [options] <symbol(s)>
```

To demangle an entire file, like a binary, pipe the contents of the file to `cu++filt`, such as in the following command:

```
nm <input file> | cu++filt
```

To demangle function names without printing their parameter types, use the following command :

```
cu++filt -p <symbol(s)>
```

To skip a leading underscore from mangled symbols, use the following command:

```
cu++filt -_ <symbol(s)>
```

Here's a sample output of `cu++filt`:

```
$ cu++filt _Z1fIiEbl
bool f<int>(long)
```

As shown in the output, the symbol `_Z1fIiEbl` was successfully demangled.

To strip all types in the function signature and parameters, use the `-p` option:

```
$ cu++filt -p _Z1fIiEbl
f<int>
```

To skip a leading underscore from a mangled symbol, use the `-_` option:

```
$ cu++filt -_ __Z1fIiEbl
bool f<int>(long)
```

To demangle an entire file, pipe the contents of the file to `cu++filt`:

```
$ nm test.sm_70.cubin | cu++filt
0000000000000000 t hello(char *)
0000000000000070 t hello(char *)::display()
0000000000000000 T hello(int *)
```

Symbols that cannot be demangled are printed back to stdout as is:

```
$ cu++filt __ZD2
__ZD2
```

Multiple symbols can be demangled from the command line:

```
$ cu++filt __ZN6Scope15Func1Enez __Z3fooIiPFYneEiEvv __ZD2
Scope1::Func1(__int128, long double, ...)
void foo<int, __int128 (*) (long double), int>()
__ZD2
```

5.2. Command-line Options

[Table 9](#) contains supported command-line options of `cu++filt`, along with a description of what each option does.

Table 9. `cu++filt` Command-line Options

Option	Description
<code>-_</code>	Strip underscore. On some systems, the CUDA compiler puts an underscore in front of every name. This option removes the initial underscore. Whether <code>cu++filt</code> removes the underscore by default is target dependent.
<code>-p</code>	When demangling the name of a function, do not display the types of the function's parameters.
<code>-h</code>	Print a summary of the options to <code>cu++filt</code> and exit.
<code>-v</code>	Print the version information of this tool.

5.3. Library Availability

cu++filt is also available as a static library (libcufilt) that can be linked against an existing project. The following interface describes its usage:

```
char* __cu_demangle(const char *id, char *output_buffer, size_t *length, int
 *status)
```

This interface can be found in the file "nv_decode.h" located in the SDK.

Input Parameters

id Input mangled string.

output_buffer Pointer to where the demangled buffer will be stored. This memory must be allocated with malloc. If output-buffer is NULL, memory will be malloc'd to store the demangled name and returned through the function return value. If the output-buffer is too small, it is expanded using realloc.

length It is necessary to provide the size of the output buffer if the user is providing pre-allocated memory. This is needed by the demangler in case the size needs to be reallocated. If the length is non-null, the length of the demangled buffer is placed in length.

status *status is set to one of the following values:

- 0 - The demangling operation succeeded
- -1 - A memory allocation failure occurred
- -2 - Not a valid mangled id
- -3 - An input validation failure has occurred (one or more arguments are invalid)

Return Value

A pointer to the start of the NUL-terminated demangled name, or NULL if the demangling fails. The caller is responsible for deallocating this memory using free.

Note: This function is thread-safe.

Example Usage

```
#include <stdio.h>
#include <stdlib.h>
#include "nv_decode.h"

int main()
{
    int status;
    const char *real_mangled_name="_ZN8clstmp01I5cls01E13clstmp01_mf01Ev";
    const char *fake_mangled_name="B@d_iDentiFier";

    char* realname = __cu_demangle(fake_mangled_name, 0, 0, &status);
    printf("fake_mangled_name:\t result => %s\t status => %d\n", realname, status);
    free(realname);

    size_t size = sizeof(char)*1000;
    realname = (char*)malloc(size);
    __cu_demangle(real_mangled_name, realname, &size, &status);
    printf("real_mangled_name:\t result => %s\t status => %d\n", realname, status);
    free(realname);
}
```

```
return 0;  
}
```

This prints:

```
fake_mangled_name:  result => (null)      status => -2  
real_mangled_name:  result => clstmp01<cls01>::clstmp01_mf01()  status => 0
```

Chapter 6. nvprune

`nvprune` prunes host object files and libraries to only contain device code for the specified targets.

6.1. Usage

`nvprune` accepts a single input file each time it's run, emitting a new output file. The basic usage is as following:

```
nvprune [options] -o <outfile> <infile>
```

The input file must be either a relocatable host object or static library (not a host executable), and the output file will be the same format.

Either the `--arch` or `--generate-code` option must be used to specify the target(s) to keep. All other device code is discarded from the file. The targets can be either a `sm_NN` arch (cubin) or `compute_NN` arch (ptx).

For example, the following will prune `libcublas_static.a` to only contain `sm_70` cubin rather than all the targets which normally exist:

```
nvprune -arch sm_70 libcublas_static.a -o libcublas_static70.a
```

Note that this means that `libcublas_static70.a` will not run on any other architecture, so should only be used when you are building for a single architecture.

6.2. Command-line Options

[Table 10](#) contains supported command-line options of `nvprune`, along with a description of what each option does. Each option has a long name and a short name, which can be used interchangeably.

Table 10. nvprune Command-line Options

Option (long)	Option (short)	Description
<code>--arch <gpu architecture name>,...</code>	<code>-arch</code>	Specify the name of the NVIDIA GPU architecture which will remain in the object or library.
<code>--generate-code</code>	<code>-gencode</code>	This option is same format as <code>nvcc --generate-code</code> option, and provides a way to specify multiple architectures which should remain in the object or library. Only the 'code' values are used as targets to match. Allowed keywords for this option: 'arch','code'.
<code>--no-relocatable-elf</code>	<code>-no-relocatable-elf</code>	Don't keep any relocatable ELF.
<code>--output-file</code>	<code>-o</code>	Specify name and location of the output file.
<code>--help</code>	<code>-h</code>	Print this help information on this tool.
<code>--options-file <file>,...</code>	<code>-optf</code>	Include command line options from specified file.
<code>--version</code>	<code>-v</code>	Print version information on this tool.

Notice

This document is provided for information purposes only and shall not be regarded as a warranty of a certain functionality, condition, or quality of a product. NVIDIA Corporation ("NVIDIA") makes no representations or warranties, expressed or implied, as to the accuracy or completeness of the information contained in this document and assumes no responsibility for any errors contained herein. NVIDIA shall have no liability for the consequences or use of such information or for any infringement of patents or other rights of third parties that may result from its use. This document is not a commitment to develop, release, or deliver any Material (defined below), code, or functionality.

NVIDIA reserves the right to make corrections, modifications, enhancements, improvements, and any other changes to this document, at any time without notice.

Customer should obtain the latest relevant information before placing orders and should verify that such information is current and complete.

NVIDIA products are sold subject to the NVIDIA standard terms and conditions of sale supplied at the time of order acknowledgement, unless otherwise agreed in an individual sales agreement signed by authorized representatives of NVIDIA and customer ("Terms of Sale"). NVIDIA hereby expressly objects to applying any customer general terms and conditions with regards to the purchase of the NVIDIA product referenced in this document. No contractual obligations are formed either directly or indirectly by this document.

OpenCL

OpenCL is a trademark of Apple Inc. used under license to the Khronos Group Inc.

Trademarks

NVIDIA and the NVIDIA logo are trademarks or registered trademarks of NVIDIA Corporation in the U.S. and other countries. Other company and product names may be trademarks of the respective companies with which they are associated.

Copyright

© 2013-2022 NVIDIA Corporation & affiliates. All rights reserved.