



NVIDIA MLNX_OFED Documentation v5.8-3.0.7.0 LTS

Table of contents

Release Notes	11
General Support	15
Changes and New Features	31
Bug Fixes in This Version	36
Known Issues	43
User Manual	84
Introduction	84
Installation	96
Features Overview and Configuration	97
Programming	98
InfiniBand Fabric Utilities	101
Troubleshooting	112
Common Abbreviations and Related Documents	113
Documentation History	117
Release Notes History	117
User Manual Revision History	117

List of Figures

Figure 0. Image2019 1 10 10 55 56 Version 1 Modificationdate
1701011595347 Api V2

Figure 1. Procedure Heading Icon Version 1 Modificationdate
1701011597990 Api V2

Figure 2. Procedure Heading Icon Version 1 Modificationdate
1701011597990 Api V2

Figure 3. Worddave635fed9c99097774044df72a47e9130 Version 1
Modificationdate 1701011602127 Api V2

Figure 4. Image2019 2 12 10 26 53 Version 1 Modificationdate
1701011606717 Api V2

Figure 5. Procedure Heading Icon Version 1 Modificationdate
1549377199353 Api V2

Figure 6. Procedure Heading Icon Version 1 Modificationdate
1549377199353 Api V2

Figure 7. Procedure Heading Icon Version 1 Modificationdate
1701011610640 Api V2

Figure 8. Procedure Heading Icon Version 1 Modificationdate
1701011611560 Api V2

Figure 9. Procedure Heading Icon Version 1 Modificationdate
1701011611560 Api V2

Figure 10. Procedure Heading Icon Version 1 Modificationdate
1701011615237 Api V2

Figure 11. Image2022 7 26 10 29 13 Version 1 Modificationdate
1701011623423 Api V2

Figure 12. Image2022 7 28 14 58 53 Version 1 Modificationdate
1701011623753 Api V2

Figure 13. Image2022 7 28 15 0 34 Version 1 Modificationdate
1701011624873 Api V2

Figure 14. Image2022 7 28 14 59 57 Version 1 Modificationdate
1701011624540 Api V2

Figure 15. Image2022 7 28 15 1 11 Version 1 Modificationdate
1701011625267 Api V2

Figure 16. Image2022 7 28 15 1 42 Version 1 Modificationdate
1701011625610 Api V2

Figure 17. Image2022 7 28 15 2 14 Version 1 Modificationdate
1701011625947 Api V2

Figure 18. Image2022 7 28 15 4 11 Version 1 Modificationdate
1701011626303 Api V2

Figure 19. Image2022 7 28 15 6 40 Version 1 Modificationdate
1701011626693 Api V2

Figure 20. Procedure Heading Icon Version 1 Modificationdate
1701011654340 Api V2

Figure 21. Procedure Heading Icon Version 1 Modificationdate
1701011654340 Api V2

Figure 22. Procedure Heading Icon Version 1 Modificationdate
1701011654340 Api V2

Figure 23. Procedure Heading Icon Version 1 Modificationdate
1701011654340 Api V2

Figure 24. Procedure Heading Icon Version 1 Modificationdate
1701011654340 Api V2

Figure 25. Procedure Heading Icon Version 1 Modificationdate
1701011654340 Api V2

Figure 26. Procedure Heading Icon Version 1 Modificationdate
1701011663163 Api V2

Figure 27. Procedure Heading Icon Version 1 Modificationdate
1701011663163 Api V2

Figure 28. Procedure Heading Icon Version 1 Modificationdate
1701011663163 Api V2

Figure 29. Procedure Heading Icon Version 1 Modificationdate
1701011663163 Api V2

Figure 30. Worddavb2ee67a7eb9aae5c536610e39a37dcc5 Version 1
Modificationdate 1701011668327 Api V2

Figure 31. Worddav6931c32564b3b0c166f4a26788219144 Version 1
Modificationdate 1701011667577 Api V2

Figure 32. Procedure Heading Icon Version 1 Modificationdate
1701011667360 Api V2

Figure 33. Image2019 3 8 12 50 6 Version 1 Modificationdate
1701011666903 Api V2

Figure 34. Procedure Heading Icon Version 1 Modificationdate
1701011667360 Api V2

Figure 35. Procedure Heading Icon Version 1 Modificationdate
1701011667360 Api V2

Figure 36. Procedure Heading Icon Version 1 Modificationdate
1701011667360 Api V2

Figure 37. Procedure Heading Icon Version 1 Modificationdate
1701011667360 Api V2

Figure 38. Procedure Heading Icon Version 1 Modificationdate
1701011667360 Api V2

Figure 39. Procedure Heading Icon Version 1 Modificationdate
1701011667360 Api V2

Figure 40. Procedure Heading Icon Version 1 Modificationdate
1701011667360 Api V2

Figure 41. Procedure Heading Icon Version 1 Modificationdate
1701011667360 Api V2

Figure 42. Procedure Heading Icon Version 1 Modificationdate
1701011667360 Api V2

Figure 43. Sriov Live Migration Stage 2 Version 1 Modificationdate
1701011670127 Api V2

Figure 44. Image2020 7 26 14 25 6 Version 1 Modificationdate
1701011671707 Api V2

Figure 45. Image2020 7 26 14 26 25 Version 1 Modificationdate
1701011671947 Api V2

Figure 46. Image2020 7 26 14 27 26 Version 1 Modificationdate
1701011672243 Api V2

Figure 47. Image2020 7 26 14 28 39 Version 1 Modificationdate
1701011672583 Api V2

Figure 48. Image2020 7 26 14 30 13 Version 1 Modificationdate
1701011672930 Api V2

Figure 49. Image2020 7 26 14 33 10 Version 1 Modificationdate
1701011673187 Api V2

Figure 50. Image2020 7 26 14 34 7 Version 1 Modificationdate
1701011673527 Api V2

Figure 51. Image2020 7 26 14 34 18 Version 1 Modificationdate
1701011673810 Api V2

Figure 52. Image2020 7 26 14 38 28 Version 1 Modificationdate
1701011674230 Api V2

Figure 53. Image2020 7 26 14 39 14 Version 1 Modificationdate
1701011674927 Api V2

Figure 54. Image2020 7 26 14 39 27 Version 1 Modificationdate
1701011675277 Api V2

Figure 55. Procedure Heading Icon Version 1 Modificationdate
1701011677840 Api V2

Figure 56. Worddav336f9b6791fd85e08c8e6897697cd75b Version 1
Modificationdate 1701011678627 Api V2

Figure 57. Procedure Heading Icon Version 1 Modificationdate
1701011679947 Api V2

Figure 58. Procedure Heading Icon Version 1 Modificationdate
1701011679947 Api V2

Figure 59. Procedure Heading Icon Version 1 Modificationdate
1701011679947 Api V2

Figure 60. Procedure Heading Icon Version 1 Modificationdate
1701011682317 Api V2

Figure 61. Procedure Heading Icon Version 1 Modificationdate
1701011682317 Api V2

Figure 62. Procedure Heading Icon Version 1 Modificationdate
1701011682317 Api V2

Figure 63. Procedure Heading Icon Version 1 Modificationdate
1701011682317 Api V2

Figure 64. Procedure Heading Icon Version 1 Modificationdate
1701011682317 Api V2

Figure 65. Procedure Heading Icon Version 1 Modificationdate
1701011682317 Api V2

Figure 66. Procedure Heading Icon Version 1 Modificationdate
1701011682317 Api V2

Figure 67. Procedure Heading Icon Version 1 Modificationdate
1701011682317 Api V2

Figure 68. Procedure Heading Icon Version 1 Modificationdate
1701011682317 Api V2

Figure 69. Procedure Heading Icon Version 1 Modificationdate
1701011682317 Api V2

Figure 70. Procedure Heading Icon Version 1 Modificationdate
1701011682317 Api V2

Figure 71. Procedure Heading Icon Version 1 Modificationdate
1701011682317 Api V2

Figure 72. Procedure Heading Icon Version 1 Modificationdate
1701011682317 Api V2

Figure 73. Procedure Heading Icon Version 1 Modificationdate
1701011682317 Api V2

Figure 74. Procedure Heading Icon Version 1 Modificationdate
1701011682317 Api V2

Figure 75. Procedure Heading Icon Version 1 Modificationdate
1701011682317 Api V2

Figure 76. Procedure Heading Icon Version 1 Modificationdate
1701011682317 Api V2

Figure 77. Procedure Heading Icon Version 1 Modificationdate
1701011682317 Api V2

Figure 78. Procedure Heading Icon Version 1 Modificationdate
1701011682317 Api V2

Figure 79. Procedure Heading Icon Version 1 Modificationdate
1701011682317 Api V2

Figure 80. Procedure Heading Icon Version 1 Modificationdate
1701011682317 Api V2

Figure 81. Procedure Heading Icon Version 1 Modificationdate
1701011682317 Api V2

Figure 82. Procedure Heading Icon Version 1 Modificationdate
1701011682317 Api V2

Figure 83. Procedure Heading Icon Version 1 Modificationdate
1701011682317 Api V2

Figure 84. Procedure Heading Icon Version 1 Modificationdate
1701011684367 Api V2

Overview

NVIDIA® OpenFabrics Enterprise Distribution for Linux (MLNX_OFED) is a single Virtual Protocol Interconnect (VPI) software stack that operates across all NVIDIA network adapter solutions.

NVIDIA OFED (MLNX_OFED) is an NVIDIA-tested and packaged version of OFED and supports two interconnect types using the same RDMA (remote DMA) and kernel bypass APIs called OFED verbs—InfiniBand and Ethernet. Up to 400Gb/s InfiniBand and RoCE (based on the RDMA over Converged Ethernet standard) over 10/25/40/50/100/200/400Gb/s are supported with OFED to enable OEMs and System Integrators to meet the needs of end users in the said markets.

Further information on this product can be found in the following MLNX_OFED documents:

- [Release Notes](#)
- [User Manual](#)

Software Download

Please visit nvidia.com/en-us/networking [Products](#) [Software](#) [InfiniBand Drivers](#)
[NVIDIA MLNX_OFED](#)

Document Revision History

For the list of changes made to the User Manual, refer to [User Manual Revision History](#).

For the list of changes made to the Release Notes, refer to [Release Notes History](#).

Release Notes

Note

This is a long-term support (LTS) release. LTS is the practice of maintaining a software product for an extended period of time (up to three years) to help increase product stability. LTS releases include bug fixes and security patches.

This LTS version should be used by customers who would like to utilize ConnectX-4 adapter cards and above and keep using stable 5.8-x deployment while getting the following:

- Critical bug fixes
- Support for new major operating systems

For other use cases, it is recommended to use the latest 5.x version.

Release Notes Update History

Version	Date	Description
5.8-3.0.7.0	July 9, 2023	Third update of 5.8 LTS branch.

Warning

As of MLNX_OFED version v5.1-0.6.6.0, the following are no longer supported.

- ConnectX-3
- ConnectX-3 Pro

- Connect-IB
- RDMA experimental verbs libraries (mlx_lib)

To utilize the above devices/libraries, refer to version 4.9 long-term support (LTS).

Release Notes contain the following sections:

- [General Support](#)
- [Changes and New Features](#)
- [Bug Fixes in This Version](#)
- [Known Issues](#)

Supported NIC Speeds

The Linux Driver operates across all NVIDIA network adapter solutions supporting the following uplinks to servers:

Uplink/Adapter Card	Driver Name	Uplink Speed
BlueField-2	mlx5	<ul style="list-style-type: none"> • InfiniBand: SDR, FDR, EDR, HDR • Ethernet: 1GbE, 10GbE, 25GbE, 40GbE, 50GbE², 100GbE²
BlueField		<ul style="list-style-type: none"> • InfiniBand: SDR, QDR, FDR, FDR10, EDR • Ethernet: 1GbE, 10GbE, 25GbE, 40GbE, 50GbE, 100GbE
ConnectX-7		<ul style="list-style-type: none"> • InfiniBand: EDR, HDR100, HDR, NDR200, NDR • Ethernet: 1GbE, 10GbE, 25GbE, 40GbE, 50GbE², 100GbE², 200GbE³, 400GbE

Uplink/Adapter Card	Driver Name	Uplink Speed
ConnectX-6 Lx		<ul style="list-style-type: none"> Ethernet: 1GbE, 10GbE, 25GbE, 40GbE, 50GbE²
ConnectX-6 Dx		<ul style="list-style-type: none"> Ethernet: 10GbE, 25GbE, 40GbE, 50GbE², 100GbE², 200GbE²
ConnectX-6		<ul style="list-style-type: none"> InfiniBand: SDR, FDR, EDR, HDR Ethernet: 10GbE, 25GbE, 40GbE, 50GbE², 100GbE², 200GbE²
ConnectX-5/ConnectX-5 Ex		<ul style="list-style-type: none"> InfiniBand: SDR, QDR, FDR, FDR10, EDR Ethernet: 1GbE, 10GbE, 25GbE, 40GbE, 50GbE, 100GbE
ConnectX-4 Lx		<ul style="list-style-type: none"> Ethernet: 1GbE, 10GbE, 25GbE, 40GbE, 50GbE
ConnectX-4		<ul style="list-style-type: none"> InfiniBand: SDR, QDR, FDR, FDR10, EDR Ethernet: 1GbE, 10GbE, 25GbE, 40GbE, 50GbE, 56GbE¹, 100GbE

1. 56GbE is an NVIDIA proprietary link speed and can be achieved while connecting an NVIDIA adapter card to NVIDIA SX10XX switch series or when connecting an NVIDIA adapter card to another NVIDIA adapter card.
2. Speed that supports both NRZ and PAM4 modes in Force mode and Auto-Negotiation mode.
3. Speed that supports PAM4 mode only.

Package Contents

Package	Revision	Licenses
clusterkit	1.8.428-1.58307	BSD
dapl	2.1.10.1.mlnx-OFED.4.9.0.1.5.58307	Dual GPL/BSD/CPL

Package	Revision	Licenses
dpcp	1.1.37-1.58307	BSD-3-Clause
dump_pr	1.0- 5.13.0.MLNX20221016.gac314ef.58307	GPLv2 or BSD
hcoll	4.8.3220-1.58307	Proprietary
ibdump	6.0.0-1.58307	BSD2+GPL2
ibsim	0.10-1.58307	GPLv2 or BSD
ibutils2	2.1.1- 0.156.MLNX20221016.g4aceb16.58307	Mellanox Confidential and Proprietary
iser	5.8-OFED.5.8.3.0.4.1	GPLv2
isert	5.8-OFED.5.8.3.0.4.1	GPLv2
kernel-mft	4.22.1-307	Dual BSD/GPL
knem	1.1.4.90mlnx2-OFED.23.07.0.2.2.1	BSD and GPLv2
libvma	9.7.2-1	GPLv2 or BSD
libxlio	2.0.7-1	GPLv2 or BSD
mlnx-en	5.8-3.0.7.0.g65e3aec	GPLv2
mlnx-ethtool	5.18-1.58307	GPL
mlnx-iproute2	5.19.0-1.58307	GPL
mlnx-nfsrdma	5.8-OFED.5.8.3.0.4.1	GPLv2
mlnx-nvme	5.8-OFED.5.8.3.0.4.1	GPLv2
mlnx-ofa_kernel	5.8-OFED.5.8.3.0.7.1	GPLv2
mlnx-tools	5.8.0-1.lts.58307	GPLv2
mlx-steering-dump	1.0.0-0.58307	GPLv2
mpi-selector	1.0.3-1.58307	BSD
mpitests	3.2.20-de56b6b.58307	BSD
mstflint	4.16.1-2.58307	GPL/BSD

Package	Revision	Licenses
multiperf	3.0-3.0.58307	BSD 3-Clause, GPL v2 or later
ofed-docs	5.8-OFED.5.8.3.0.7	GPL/BSD
ofed-scripts	5.8-OFED.5.8.3.0.7	GPL/BSD
openmpi	4.1.5a1-1.58307	BSD
opensm	5.13.0.MLNX20221016.10d3954-0.1.58307	GPLv2 or BSD
openvswitch	2.17.2-1.58307	ASL 2.0 and LGPLv2+ and SISSL
perfctest	4.5-0.18.gfcddfe0.58307	BSD 3-Clause, GPL v2 or later
rdma-core	58mlnx43-1.58307	GPLv2 or BSD
rshim	2.0.6-18.g955dbef	GPLv2
sharp	3.1.1.MLNX20221122.c93d7550-1.58307	Proprietary
sockperf	3.10-0.git5ebd327da983.58307	BSD
srp	5.8-OFED.5.8.3.0.4.1	GPLv2
ucx	1.14.0-1.58307	BSD
xpmem	2.6.4-1.58307	GPLv2 and LGPLv2.1

General Support

Supported Operating Systems

Operating System	Architecture	Default Kernel Version (Primary)/ Tested with Kernel Version (Community)	OS Support Model	ASAP 2 OVS-Kernel SR-IOV	ASAP 2 OVS-DP SR-IOV	NFS on RDMA	NVMe	GPU Direct Storage (GDS)	UCX-UDA Version	NEO-Host
ALIOS7.2	AArch64	4.19.48-006.ali4000.alios7.arch64	Primary	✗	✗	✗	✗	✗	✗	✗
Alma 8.5	x86_64	4.18.0-348.12.2.EL8_5.X86_64	Community	✗	✗	✗	✗	✗	✗	✗
Anolis OS 8.4	AArch64	4.18.0-348.2.1.AN8_4.AARCH64	Community	✗	✗	✗	✗	✗	✗	✗
	x86_64	4.18.0-305.AN8.X86_64	Community	✗	✗	✗	✗	✗	✗	✗
BCLINUX21.10SP2	AArch64	4.19.90-2107.6.0.0098.oe1.bclinux.aarch64	Primary	✗	✗	✗	✗	✗	✗	✗
BCLINUX8.1	AArch64		Community	✗	✗	✗	✗	✗	✗	✗
	x86_64	4.19.0-193.1.3.el8.bclinux.x86_64	Community	✗	✗	✗	✗	✗	✗	✗
BCLINUX8.2	x86_64	4.19.0-240.23.11.el8_2.bclinux.x86_64	Primary	✗	✗	✗	✗	✗	✗	✗
CentOS Stream v8	AArch64	4.18.0-499.el8.aarch64	Community	✗	✗	✗	✗	✗	✗	✗

			ty								
	x86_64	4.18.0-499.el8.x86_64	Community	✗	✗	✗	✗	✗	✗	✗	✗
CentOS Stream v9	AArch64	5.14.0-331.el9.aarch64	Community	✗	✗	✗	✗	✗	✗	✗	✗
	x86_64	5.14.0-331.el9.x86_64	Community	✗	✗	✗	✗	✗	✗	✗	✗
CTYUNOS2.0	AArch64	4.19.90-2102.2.0.0062.ctl2.aarch64	Primary	✗	✗	✗	✗	✗	✗	✗	✗
	x86_64	4.19.90-2102.2.0.0062.ctl2.x86_64	Primary	✗	✗	✗	✗	✗	✗	✗	✗
Debian10.8	AArch64	4.19.0-14-arm64	Primary	✗	✗	✗	✗	✗	✗	✗	✗
	x86_64	4.19.0-14-amd64	Primary	✗	✗	✗	✗	✗	✗	✗	✗
Debian10.9	x86_64	4.19.0-16-amd64	Primary	✓	✗	✗	✓	✗	✗	✗	
Debian11.3	AArch64	5.10.0-13-arm64	Primary	✓	✗	✗	✓	✗	✗	✗	
	x86_64	5.10.0-13-amd64	Primary	✓	✗	✗	✓	✗	✗	✗	
Debian9.13	AArch64	4.9.0-13-arm64	Primary	✗	✗	✗	✗	✗	✗	✗	
	x86_64	4.9.0-13-amd64	Primary	✗	✗	✗	✗	✗	✗	✗	
EulerOS2.0sp8	AArch64	4.19.36-vhulk1907.1.0.h748.eulerosv2r8.aarch64	Community	✗	✗	✗	✗	✗	✗	✗	

EulerOS2.0s p10	AArch 64	4.19.90- vhulk2110.1.0.h860. eulerosv2r10.aarch 64	Prim ary	✗	✗	✗	✗	✗	✗	✗
	x86_6 4	4.18.0- 147.5.2.4.h694.eule rosv2r10.x86_64	Prim ary	✗	✗	✗	✗	✗	✗	✗
EulerOS2.0s p11	AArch 64	5.10.0- 60.18.0.50.h323.eul erosv2r11.aarch64	Prim ary	✗	✗	✗	✗	✗	✗	✗
	x86_6 4	5.10.0- 60.18.0.50.h323.eul erosv2r11.x86_64	Prim ary	✗	✗	✗	✗	✗	✗	✗
EulerOS2.0s p9	AArch 64	4.19.90- vhulk2006.2.0.h171. eulerosv2r9.aarch6 4	Prim ary	✗	✗	✗	✗	✗	✗	✗
	x86_6 4	4.18.0- 147.5.1.0.h269.eule rosv2r9.x86_64	Prim ary	✗	✗	✗	✗	✗	✗	✗
Fedora 35	x86_6 4	5.16.8- 200.fc35.x86_64	Com muni ty	✗	✗	✗	✗	✗	✗	✗
KYLIN10	AArch 64	4.19.90- 17.ky10.aarch64	Prim ary	✗	✗	✗	✗	✓	✗	✗
	x86_6 4	4.19.90- 17.ky10.x86_64	Prim ary	✗	✗	✗	✗	✓	✗	✗
KYLIN10SP2	AArch 64	4.19.90- 24.4.v2101.ky10.aar ch64	Prim ary	✗	✗	✗	✗	✗	✗	✗
	x86_6 4	4.19.90- 24.4.v2101.ky10.x86 _64	Prim ary	✓	✗	✗	✗	✗	✗	✓
KYLIN10SP3	AArch 64	4.19.90- 52.15.v2207.ky10.aa	Prim ary	✗	✗	✗	✗	✗	✗	✗

		rch64									
	x86_64	4.19.90-52.15.v2207.ky10.x86_64	Primary	✓	✗	✗	✗	✗	✗	✗	✓
Oracle Linux 7.9	x86_64	5.4.17-2011.6.2.el7uek.x86_64	Primary	✓	✗	✗	✗	✗	✗	✗	✗
Oracle Linux 8.4	x86_64	5.4.17-2102.201.3.el8uek.x86_64	Primary	✓	✗	✗	✗	✗	✗	✗	✗
Oracle Linux 8.6	x86_64	5.4.17-2136.307.3.1.el8uek.x86_64	Primary	✓	✗	✗	✗	✗	✗	✗	✗
Oracle Linux 9.0	x86_64	5.15.0-0.30.19.el9uek.x86_64	Primary	✗	✗	✗	✗	✗	✗	✗	✗
OpenSUSE 15.3	AArch64	-	Community	✗	✗	✗	✗	✗	✗	✗	✗
	ppc64le	-	Community	✗	✗	✗	✗	✗	✗	✗	✗
	x86_64	5.3.18-150300.59.43-DEFAULT	Community	✗	✗	✗	✗	✗	✗	✗	✗
OPENEULER 20.03SP3	AArch64	4.19.90-2112.8.0.0131.oe1.arch64	Primary	✗	✗	✗	✗	✗	✗	✗	✗
	x86_64	4.19.90-2112.8.0.0131.oe1.x86_64	Primary	✗	✗	✗	✗	✗	✗	✗	✗
OPENEULER 22.03	AArch64	5.10.0-60.18.0.50.oe2203.arch64	Primary	✗	✗	✗	✗	✗	✗	✗	

	x86_64	5.10.0-60.18.0.50.oe2203.x86_64	Primary	✗	✗	✗	✗	✗	✗	✗
Photon OS 3.0	x86_64	4.19.225-3.ph3	Community	✗	✗	✗	✗	✗	✗	✗
RHEL/CentOS 7.2	x86_64	3.10.0-327.el7.x86_64	Primary	✗	✗	✗	✓	✗	11.7	✗
RHEL/CentOS 7.4	ppc64	3.10.0-693.el7.ppc64	Primary	✓	✓	✗	✓	✗	✗	✓
	ppc64le	3.10.0-693.el7.ppc64le	Primary	✓	✓	✗	✓	✗	✗	✓
	x86_64	3.10.0-693.el7.x86_64	Primary	✓	✓	✗	✓	✗	11.7	✓
RHEL/CentOS 7.6	ppc64	3.10.0-957.el7.ppc64	Primary	✓	✓	✗	✓	✗	✗	✓
	ppc64le	3.10.0-957.el7.ppc64le	Primary	✓	✓	✗	✓	✗	✗	✓
	x86_64	3.10.0-957.el7.x86_64	Primary	✓	✓	✓	✓	✗	11.7	✓
RHEL/CentOS 7.6alternate	aarch64	4.14.0-115.el7a.aarch64	Community	✓	✓	✗	✓	✗	✗	✓
	ppc64le	4.14.0-115.el7a.ppc64le	Community	✓	✓	✗	✓	✗	✗	✓
RHEL/CentOS 7.7	x86_64	3.10.0-1062.el7.x86_64	Primary	✓	✓	✗	✗	✗	11.7	✓
RHEL/CentOS 7.8	ppc64	3.10.0-1127.el7.ppc64	Primary	✓	✓	✗	✓	✗	✗	✓
	ppc64le	3.10.0-1127.el7.ppc64le	Primary	✓	✓	✗	✓	✗	✗	✓

	x86_64	3.10.0-1127.el7.x86_64	Primary	✓	✓	✓	✓	✗	11.7	✓
RHEL/CentOS7.9	ppc64	3.10.0-1160.el7.ppc64	Primary	✓	✓	✗	✓	✗	✗	✓
	ppc64le	3.10.0-1160.el7.ppc64le	Primary	✓	✓	✗	✓	✗	✗	✓
	x86_64	3.10.0-1160.el7.x86_64	Primary	✓	✓	✓	✓	✗	11.7	✓
RHEL/CentOS8.0	AArch64	4.18.0-80.el8.aarch64	Primary	✓	✓	✗	✗	✓	11.7	✓
	ppc64le	4.18.0-80.el8.ppc64le	Primary	✓	✓	✗	✗	✓	✗	✓
	x86_64	4.18.0-80.el8.x86_64	Primary	✓	✓	✗	✗	✓	11.7	✓
RHEL/CentOS8.1	AArch64	4.18.0-147.el8.aarch64	Primary	✓	✓	✗	✗	✓	11.7	✓
	ppc64le	4.18.0-147.el8.ppc64le	Primary	✓	✓	✗	✗	✓	✗	✓
	x86_64	4.18.0-147.el8.x86_64	Primary	✓	✓	✗	✗	✓	11.7	✓
RHEL/CentOS8.2	AArch64	4.18.0-193.el8.aarch64	Primary	✓	✓	✗	✓	✓	11.7	✓
	ppc64le	4.18.0-193.el8.ppc64le	Primary	✓	✓	✗	✓	✓	✗	✓
	x86_64	4.18.0-193.el8.x86_64	Primary	✓	✓	✓	✓	✓	11.7	✓
RHEL/CentOS8.3	AArch64	4.18.0-240.el8.aarch64	Primary	✓	✓	✗	✗	✓	11.7	✓
	ppc64le	4.18.0-240.el8.ppc64le	Primary	✓	✓	✗	✗	✓	✗	✓
	x86_64	4.18.0-240.el8.x86_64	Primary	✓	✓	✗	✗	✓	11.7	✓

RHEL/CentOS 8.4	AArch64	4.18.0-305.el8.aarch64	Primary	✓	✓	✗	✓	✓	11.7	✓
	ppc64le	4.18.0-305.el8.ppc64le	Primary	✓	✓	✗	✓	✓	✗	✓
	x86_64	4.18.0-305.el8.x86_64	Primary	✓	✓	✓	✓	✓	11.7	✓
RHEL/CentOS/Rocky8.5	AArch64	4.18.0-348.el8.aarch64	Primary	✓	✓	✗	✓	✓	11.7	✓
	ppc64le	4.18.0-348.el8.ppc64le	Primary	✓	✓	✗	✓	✓	✗	✓
	x86_64	4.18.0-348.el8.x86_64	Primary	✓	✓	✓	✓	✓	11.7	✓
RHEL/Rocky 8.6	AArch64	4.18.0-372.41.1.el8_6.aarch64	Primary	✓	✗	✗	✓	✓	11.7	✓
	ppc64le	4.18.0-372.41.1.el8_6.ppc64le	Primary	✓	✗	✗	✓	✓	✗	✓
	x86_64	4.18.0-372.41.1.el8_6.x86_64	Primary	✓	✗	✓	✓	✓	11.7	✓
RHEL/Rocky 8.7	AArch64	4.18.0-425.14.1.el8_7.aarch64	Primary	✓	✗	✗	✓	✓	11.7	✓
	ppc64le	4.18.0-425.14.1.el8_7.ppc64le	Primary	✓	✗	✗	✓	✓	✗	✓
	x86_64	4.18.0-425.14.1.el8_7.x86_64	Primary	✓	✗	✓	✓	✓	11.7	✓
RHEL/Rocky 8.8	AArch64	4.18.0-477.10.1.el8_8.aarch64	Primary	✓	✗	✗	✓	✓	11.7	✓

	ppc64le	4.18.0-477.10.1.el8_8.ppc64le	Primary	✓	✗	✗	✓	✓	✗	✓
	x86_64	4.18.0-477.10.1.el8_8.x86_64	Primary	✓	✗	✓	✓	✓	11.7	✓
RHEL/Rocky 9.0	AArch64	5.14.0-70.46.1.el9_0.aarch64	Primary	✓	✗	✗	✓	✓	11.7	✗
	ppc64le	5.14.0-70.46.1.el9_0.ppc64le	Primary	✓	✗	✗	✓	✓	✗	✗
	x86_64	5.14.0-70.46.1.el9_0.x86_64	Primary	✓	✗	✓	✓	✓	11.7	✗
RHEL/Rocky 9.1	AArch64	5.14.0-162.19.1.el9_1.aarch64	Primary	✓	✗	✗	✓	✓	11.7	✗
	ppc64le	5.14.0-162.19.1.el9_1.ppc64le	Primary	✓	✗	✗	✓	✓	✗	✗
	x86_64	5.14.0-162.19.1.el9_1.x86_64	Primary	✓	✗	✓	✓	✓	11.7	✗
RHEL/Rocky 9.2	AArch64	5.14.0-284.11.1.el9_2.aarch64	Primary	✓	✗	✗	✓	✓	11.7	✗
	ppc64le	5.14.0-284.11.1.el9_2.ppc64le	Primary	✓	✗	✗	✓	✓	✗	✗
	x86_64	5.14.0-284.11.1.el9_2.x86_64	Primary	✓	✗	✓	✓	✓	11.7	✗
SLES12SP2	x86_64	4.4.21-69-default	Community	✗	✗	✗	✗	✗	✗	✗

			ty							
SLES12SP3	ppc64le	4.4.73-5-default	Community	✗	✗	✗	✗	✗	✗	✓
	x86_64	4.4.73-5-default	Community	✗	✗	✗	✗	✗	✗	✓
SLES12SP4	AArch64	4.12.14-94.41-default	Community	✓	✗	✗	✓	✗	✗	✓
	ppc64le	4.12.14-94.41-default	Community	✓	✗	✗	✓	✗	✗	✓
	x86_64	4.12.14-94.41-default	Community	✓	✗	✗	✓	✗	✗	✓
SLES12SP5	AArch64	4.12.14-120-default	Primary	✓	✗	✓	✓	✗	✗	✓
	ppc64le	4.12.14-120-default	Primary	✓	✗	✓	✓	✗	✗	✓
	x86_64	4.12.14-120-default	Primary	✓	✗	✓	✓	✗	✗	✓
SLES15SP2	AArch64	5.3.18-22-default	Primary	✓	✓	✓	✓	✗	✗	✓
	ppc64le	5.3.18-22-default	Primary	✓	✓	✓	✓	✗	✗	✓
	x86_64	5.3.18-22-default	Primary	✓	✓	✓	✓	✗	✗	✓
SLES15SP3	AArch64	5.3.18-57-default	Primary	✓	✗	✓	✓	✗	✗	✓
	ppc64le	5.3.18-57-default	Primary	✓	✗	✓	✓	✗	✗	✓
	x86_64	5.3.18-57-default	Prim	✓	✗	✓	✓	✗	✗	✓

	4		ary								
SLES15SP4	AArch64	5.14.21-150400.22-default	Primary	✓	✗	✓	✓	✗	✗	✗	✗
	ppc64le	5.14.21-150400.22-default	Primary	✓	✗	✓	✓	✗	✗	✗	✗
	x86_64	5.14.21-150400.22-default	Primary	✓	✗	✓	✓	✗	✗	✗	✗
SLES15SP5	AArch64	5.14.21-150500.53-default	Primary	✓	✗	✓	✓	✗	✗	✗	✗
	ppc64le	5.14.21-150500.53-default	Primary	✓	✗	✓	✓	✗	✗	✗	✗
	x86_64	5.14.21-150500.53-default	Primary	✓	✗	✓	✓	✗	✗	✗	✗
Ubuntu16.04	ppc64le	4.4.0-21-generic	Community	✗	✗	✗	✗	✗	✗	✗	✗
	x86_64	4.4.0-21-generic	Community	✗	✗	✗	✗	✗	✗	✗	✗
Ubuntu18.04	AArch64	4.15.0-20-generic	Primary	✓	✓	✓	✓	✓	11.6	✓	✓
	ppc64le	4.15.0-20-generic	Primary	✓	✓	✓	✓	✓	✗	✓	✓
	x86_64	4.15.0-20-generic	Primary	✓	✓	✓	✓	✓	11.6	✓	✓
Ubuntu20.04	AArch64	5.4.0-26-generic	Primary	✓	✓	✓	✓	✓	11.7	✓	✓
	ppc64le	5.4.0-26-generic	Primary	✓	✓	✓	✓	✓	✗	✓	✓
	x86_64	5.4.0-26-generic	Primary	✓	✓	✓	✓	✓	11.7	✓	✓
Ubuntu22.04	AArch64	5.15.0-25-generic	Primary	✓	✗	✓	✓	✓	11.7	✗	✗

	ppc64le	5.15.0-25-generic	Primary	✓	✗	✓	✓	✓	✗	✗
	x86_64	5.15.0-25-generic	Primary	✓	✗	✓	✓	✓	11.7	✗
Ubuntu22.10	x86_64	5.19.0-15-generic	Primary	✓	✗	✓	✓	✗	✗	✗
UOS20.1020	AArch64	4.19.90-2109.1.0.0108.up2.el20.aarch64	Primary	✗	✗	✗	✗	✗	✗	✗
	x86_64	4.19.90-2109.1.0.0108.up2.el20.x86_64	Primary	✗	✗	✗	✗	✗	✗	✗
UOS20.1040	AArch64	4.19.0-arm64-server	Primary	✗	✗	✗	✗	✗	✗	✗
	x86_64	4.19.0-server-amd64	Primary	✗	✗	✗	✗	✗	✗	✗
Citrix XenServer Host7.1	x86_64	4.4.0+2	Primary	✗	✗	✗	✗	✗	✗	✗
Citrix XenServer Host8.2	x86_64	4.19.0+1	Primary	✗	✗	✗	✗	✗	✗	✗
Kernel 6.0	AArch64	6.0	Primary	✗	✗	✓	✓	✗	✗	✗
	ppc64le	6.0	Primary	✗	✗	✓	✓	✗	✗	✗
	x86_64	6.0	Primary	✗	✗	✓	✓	✗	✗	✗

Warning

- 32 bit platforms are no longer supported in MLNX_OFED
- For RPM-based distributions, to install OFED on a different kernel, create a new ISO image using `mlnx_add_kernel_support.sh` script (see the MLNX_OFED User Manual for instructions)
- Upgrading MLNX_OFED on a cluster requires upgrading all of its nodes to the newest version as well
- If using MLNX_OFED 4.9 LTS with MLNX_OFED 5.x with upstream verbs, MLNX_OFED 4.9 must be installed with `--upstream-libs` flag so the verbs libraries match.
- A combination of 4.9 LTS default verbs and MOFED 5.x upstream verbs is not supported.
- All operating systems listed above are fully supported in Paravirtualized and SR-IOV environments with Linux KVM Hypervisor

Upgrade/Downgrade Matrix

This section reflects which versions were tested and verified for upgrade and downgrade.

Target Version	Versions Verified for Upgrade/Downgrade	Release Type	Release Date
5.8-3.0.7.0 GA-LTS-Update (June 2023 Update #3)	5.8-2.0.3.0	GA-LTS-Update #2	February 2023
	5.8- 1.0.1.1	GA-LTS	October 2022
	5.7-1.0.2.0	GA	July 2022
	5.4-3.6.8.1	GA-LTS-Update	Novemer 2022

MLNX_OFED Version Interoperability

This section reflects which versions were tested and verified for multi-version environments.

Target Version	Verified OFED Version Interoperability	Release Type	Release Date
5.8-3.0.7.0 GA-LTS-Update (June 2023 Update #3)	5.8-2.0.3.0	GA-LTS-Update #2	February 2023

Supported Non-Linux Virtual Machines

The following are the supported non-Linux Virtual Machines in this current version:

NIC	Windows Virtual Machine Type	Minimal WinOF Version	Protocol
ConnectX-4	Windows 2012 R2 DC	MLNX_WinOF2 2.50	IB, IPoIB, ETH
ConnectX-4 Lx	Windows 2016 DC	MLNX_WinOF2 2.50	IB, IPoIB, ETH
ConnectX-5 family	All Windows server editions	MLNX_WinOF2 2.50	IPoIB, ETH
ConnectX-6 family		MLNX_WinOF2 2.50	IPoIB, ETH

Support in ASAP2—Accelerated Switch and Packet Processing®

ASAP ² Requirements	<ul style="list-style-type: none"> • iproute >= 4.12 (for tc support) • Upstream Open vSwitch >= 2.8 for CentOS 7.2 NVIDIA openvswitch
ASAP2-Supported Adapter Cards	<ul style="list-style-type: none"> • ConnectX-5 • ConnectX-6 Dx • ConnectX-6 Lx

- ConnectX-7

Lustre Versions Compatible with MLNX_OFED

- Lustre 2.15.1
- Lustre 2.12.9

Hardware and Software Requirements

- Linux operating system
- Administrator privileges on your machine(s)
- Disk Space: 1GB

For the OFED Distribution to compile on your machine, some software packages of your operating system (OS) distribution are required.

To install the additional packages, run the following commands per OS:

Operating System	Required Packages Installation Command
RHEL/Oracl e Linux/Fedo ra	<code>yum install perl pciutils python gcc-gfortran libxml2-python tcsh libnl.i686 libnl expat glib2 tcl libstdc++ bc tk gtk2 atk cairo numactl pkgconfig ethtool lsof</code>
XenServer	<code>yum install perl pciutils python libxml2-python libnl expat glib2 tcl bc libstdc++ tk pkgconfig ethtool</code>
SLES 12	<code>zypper install pkg-config expat libstdc++6 libglib-2_0-0 lib- gtk-2_0-0 tcl libcairo2 tcsh python bc pciutils libatk-1_0-0 tk python-libxml2 lsof libnl3-200 ethtool lsof</code>
SLES 15	<code>python ethtool libatk-1_0-0 python2-libxml2-python tcsh lib- stdc++6-devel-gcc7 libgtk-2_0-0 tcl libopenssl1_1 libnl3-200 make libcairo2 expat libmnl0 inserv-compat pciutils lsof lib- glib-2_0-0 pkg-config tk</code>
Ubuntu/De bian	<code>apt-get install perl dpkg autotools-dev autoconf libtool auto- make1.10 automake m4 dkms debhelper tcl tcl8.4 chrpath swig graphviz tcl-dev tcl8.4-dev tk-dev tk8.4-dev bison flex dpatch zlib1g-dev curl libcurl4-gnutls-dev python-libxml2 libvirt-bin libvirt0 libnl-dev libglib2.0-dev libgfortran3 automake m4 pkg-config libnuma logrotate ethtool lsof</code>

Supported NIC Firmware Versions

Warning

As of version 5.1, ConnectX-3, ConnectX-3 Pro or Connect-IB adapter cards are no longer supported. To work with a version that supports these adapter cards, please refer to version 4.9 long-term support (LTS).

This current version is tested with the following NVIDIA adapter card firmware versions:

Adapter Card	Bundled Firmware Version	Additional Supported Firmware Version
BlueField®-2	24.35.3006	24.35.2000
BlueField	18.33.1048	N/A
ConnectX-7	28.35.3006	28.35.2000
ConnectX-6 Lx	26.35.3006	26.35.2000
ConnectX-6 Dx	22.35.3006	22.35.2302 (It is recommended to upgrade to this firmware version because it improves physical-layer performance. For further information, see the firmware release notes .)
ConnectX-6	20.35.3006	20.35.2000
ConnectX-5/ConnectX-5 Ex	16.35.3006	16.35.2000
ConnectX-4 Lx	14.32.1010	N/A
ConnectX-4	12.28.2006	N/A

For the official firmware versions, please see [https://www.nvidia.com/en-us/networking/Support Support Firmware Download](https://www.nvidia.com/en-us/networking/Support%20Support%20Firmware%20Download).

Unsupported Functionalities/Features/NICs

The following are the unsupported functionalities/features/NICs in the current version:

- ConnectX-2 adapter card
- ConnectX-3 adapter card
- ConnectX-3 Pro adapter card
- Connect-IB adapter card
- Soft-RoCE
- RDMA experimental verbs library (mlnx_lib)
- CIFS (Common Internet File System) module installation.
- Relational Database Service (RDS)
- mthca InfiniBand driver
- Ethernet IPoIB (eIPoIB)

Changes and New Features

New Features

The following are the new features and changes that were added in this version. The supported adapter cards are specified as follows:

Supported Cards	Description
All HCAs	Supported in the following adapter cards <u>unless specifically stated otherwise:</u> ConnectX-4 / ConnectX -4 Lx / ConnectX-5 / ConnectX-6 / ConnectX-6 Dx / ConnectX-6 Lx / ConnectX-7 / BlueField-2

Supported Cards	Description
ConnectX-6 Dx and above	Supported in the following adapter cards <u>unless specifically stated otherwise:</u> ConnectX-6 Dx / ConnectX-6 Lx / ConnectX-7 / BlueField-2
ConnectX-6 and above	Supported in the following adapter cards <u>unless specifically stated otherwise:</u> ConnectX-6 / ConnectX-6 Dx / ConnectX-6 Lx / ConnectX-7 / BlueField-2
ConnectX-5 and above	Supported in the following adapter cards <u>unless specifically stated otherwise:</u> ConnectX-5 / ConnectX-6 / ConnectX-6 Dx / ConnectX-6 Lx / ConnectX-7 / BlueField-2
ConnectX-4 and above	Supported in the following adapter cards <u>unless specifically stated otherwise:</u> ConnectX-4 / ConnectX -4 Lx / ConnectX-5 / ConnectX-6 / ConnectX-6 Dx / ConnectX-6 Lx / ConnectX-7 / BlueField-2

Feature/Change	Description
5.8-3.0.7.0	
Operating Systems	Added support for the following operating systems: <ul style="list-style-type: none"> • RHEL 9.2 • RHEL 8.8 • SLES15-SP5 • KYLIN10-SP3
General	Bug fixes
5.8-2.0.3.0	
General	Bug fixes
5.8- 1.1.2.1	
General	Bug fixes
5.8- 1.0.1.1	

Feature/Change	Description
Remove Dependency Between SR-IOV and eSwitch Mode	[All HCAs] Removed dependency between SR-IOV and eSwitch mode. Currently, there are three eSwitch modes: none, legacy, and switchdev (non of which are the default mode). When disabling SR-IOV, the current eSwitch mode will be changed to none. This feature removes eSwitch mode none and also removes dependency between SR-IOV and eSwitch mode.
DevLink Parallel Command	[All HCAs] Added support for running DevLink commands in parallel on different DevLink devices is possible. For example, burning firmware on a few cards on the same host in parallel using DevLink API is now possible.
Graceful Shutdown of Parent and Page Supplier	[All HCAs] Set default graceful period values for functions based on their type. ECPFs will get graceful period of 3 minutes, PFs get 1 minute, and VFs/SFs get 30 seconds.
N Pulses Per Second (NPPS)	[ConnectX-6 Dx and above] Enhanced NPPS to allow setting a pulse period higher than 1 pulse per second and to allow setting the pulse width. If the width is unset, the driver implicitly sets it to half the given period (the width should be less than the pulse period). In this release, the pulse duration ranges between 65536 NS–524288 NS.
Remote Invalidate Option for MKeys	[All HCAs] Added support for the option to enable remote invalidation when creating a new mkey. This way the rkey for a memory region can be changed frequently.
GPUDirect Over DMA-BUF	<p>[All HCAs] Added support for GPUDirect support over dma-buf. As such, using the new mechanism <code>nv_peer_mem</code> is no longer required. The following is required for dma-buf support:</p> <ul style="list-style-type: none"> • Linux kernel version 5.12 or later • OpenRM version 515 or later <p>Perftest support was added as well: Default option in perftest is without <code>dmabuf</code>. To run with this option, add <code>-use_cuda_dmabuf</code> in addition to <code>use_cuda</code> flag.</p>
Floating LID	[ConnectX-7] Added support for Floating LID (FLID) which can be used to identify a group of InfiniBand routers that allow communication with

Feature/Change	Description
	<p>another subnet's entity. With this feature, multiple routers can be used per destination so that adaptive routing is supported.</p> <p>The FLID feature needs support from components such as the host, the subnet manager, the router, and more. This feature is only supported on the host portion of the system.</p>
General	Bug fixes

For additional information on the new features, please refer to [MLNX_OFED User Manual](#).

Customer Affecting Changes

Customer Affecting Change	Description																		
5.8-2.0.3.0																			
Installation, ISO, RedHat	<p>In order to address RHEL kernel symbol changes, starting from OFED version 5.8-2.0.3.0, ISO images for the following operating systems are built with the updated kernel versions as follows:</p> <table border="1"> <thead> <tr> <th>OS Name</th> <th>Old Kernel</th> <th>New Kernel</th> </tr> </thead> <tbody> <tr> <td>rhel8.6-aarch64</td> <td>4.18.0-372.9.1.el8_6.aarch64</td> <td>4.18.0-372.41.1.el8_6.aarch64</td> </tr> <tr> <td>rhel8.6-ppc64le</td> <td>4.18.0-372.0.1.el8_6.ppc64le</td> <td>4.18.0-372.41.1.el8_6.ppc64le</td> </tr> <tr> <td>rhel8.6-x86_64</td> <td>4.18.0-372.9.1.el8_6.x86_64</td> <td>4.18.0-372.41.1.el8_6.x86_64</td> </tr> <tr> <td>rhel8.7-aarch64</td> <td>4.18.0-425.3.1.el8.aarch64</td> <td>4.18.0-425.14.1.el8_7.aarch64</td> </tr> <tr> <td>rhel8.7-ppc64le</td> <td>4.18.0-425.3.1.el8.ppc64le</td> <td>4.18.0-425.14.1.el8_7.ppc64le</td> </tr> </tbody> </table>	OS Name	Old Kernel	New Kernel	rhel8.6-aarch64	4.18.0-372.9.1.el8_6.aarch64	4.18.0-372.41.1.el8_6.aarch64	rhel8.6-ppc64le	4.18.0-372.0.1.el8_6.ppc64le	4.18.0-372.41.1.el8_6.ppc64le	rhel8.6-x86_64	4.18.0-372.9.1.el8_6.x86_64	4.18.0-372.41.1.el8_6.x86_64	rhel8.7-aarch64	4.18.0-425.3.1.el8.aarch64	4.18.0-425.14.1.el8_7.aarch64	rhel8.7-ppc64le	4.18.0-425.3.1.el8.ppc64le	4.18.0-425.14.1.el8_7.ppc64le
OS Name	Old Kernel	New Kernel																	
rhel8.6-aarch64	4.18.0-372.9.1.el8_6.aarch64	4.18.0-372.41.1.el8_6.aarch64																	
rhel8.6-ppc64le	4.18.0-372.0.1.el8_6.ppc64le	4.18.0-372.41.1.el8_6.ppc64le																	
rhel8.6-x86_64	4.18.0-372.9.1.el8_6.x86_64	4.18.0-372.41.1.el8_6.x86_64																	
rhel8.7-aarch64	4.18.0-425.3.1.el8.aarch64	4.18.0-425.14.1.el8_7.aarch64																	
rhel8.7-ppc64le	4.18.0-425.3.1.el8.ppc64le	4.18.0-425.14.1.el8_7.ppc64le																	

Customer Affecting Change	Description
	<pre> rhel8.7-x86_64 4.18.0-425.3.1.el8.x86_64 4.18.0-425.14.1.el8_7.x86_64 rhel9.0-aarch64 5.14.0-70.13.1.el9_0.aarch64 5.14.0-70.46.1.el9_0.aarch64 rhel9.0-ppc64le 5.14.0-70.13.1.el9_0.ppc64le 5.14.0-70.46.1.el9_0.ppc64le rhel9.0-x86_64 5.14.0-70.13.1.el9_0.x86_64 5.14.0-70.46.1.el9_0.x86_64 rhel9.1-aarch64 5.14.0-162.6.1.el9_1.aarch64 5.14.0-162.19.1.el9_1.aarch64 rhel9.1-ppc64le 5.14.0-162.6.1.el9_1.ppc64le 5.14.0-162.19.1.el9_1.ppc64le rhel9.1-x86_64 5.14.0-162.6.1.el9_1.x86_64 5.14.0-162.19.1.el9_1.x86_64 </pre> <p>This change comes to support RedHat updated kernels without the need to add --add-kernel-support during OFED installation.</p>

API Changes in MLNX_OFED

MLNX_OFED Verbs API Migration

As of MLNX_OFED v5.0 release (Q1 of the year 2020), MLNX_OFED Verbs API have migrated from the legacy version of user space verbs libraries (libibverbs, libmlx5, etc.) to the Upstream version rdma-core.

For the list of MLNX_OFED verbs APIs that have been migrated, refer to [Migration to RDMA-Core document](#).

Bug Fixes in This Version

Below are the bugs fixed in this version. For a list of fixes previous version, see [Bug Fixes History](#).

Internal Reference Number	Description
3484175	Description: The driver conducted a recovery without considering whether the device is in teardown or probe flow, causing the kernel to crash.
	Keywords: Core, Recovery
	Discovered in Release: 5.8- 1.0.1.1
	Fixed in Release: 5.8-3.0.7.0
3440491	Description: High storage IO latency that occurred while establishing a large number of rdma_cm connections by setting the rdma_cm RoCE static rate to 0.
	Keywords: RDMA, Static Rate
	Discovered in Release: 5.0-1.0.0.0
	Fixed in Release: 5.8-3.0.7.0
3491146	Description: "rdma res show qp" returns an unexpected "Invalid argument" error when there's a large number of QPs.
	Keywords: RDMA Tool, QP
	Discovered in Release: 5.4-3.1.0.0
	Fixed in Release: 5.8-3.0.7.0
3428773	Description: A soft lockup causes call trace. Upgraded knem to support RHEL 8.7, to avoid this issue.
	Keywords: Installation, knem, RHEL 8.7
	Discovered in Release: 5.8- 1.0.1.1
	Fixed in Release: 5.8-3.0.7.0
3485679	Description: In some systems with multiple ConnectX adapters, after loading the mlx5_core drivers, a system may hang in the

Internal Reference Number	Description
	<p>middle of the boot process.</p> <p>Keywords: Installation, Boot, ConnectX Adapters</p> <p>Discovered in Release: 5.7-1.0.2.0</p> <p>Fixed in Release: 5.8-3.0.7.0</p>
3440362	<p>Description: Reading tir-dir or indir-tir from Sysfs causes kernel to crash.</p> <p>Keywords: Sysfs</p> <p>Discovered in Release: 5.8- 1.0.1.1</p> <p>Fixed in Release: 5.8-3.0.7.0</p>
3432282	<p>Description: On some occasions, when the active channel is paired with a remote Non-Uniform Memory Access (NUMA), PCI retransmission may occur due to lack of ordering. Added support for using Relaxed Ordering in VFs directly and in VFs assigned to QEMU. Relaxed Ordering improves performance on certain setups. Until now, it could be used only in PFs.</p> <p>Keywords: Performance, VF</p> <p>Discovered in Release: 5.8-2.0.3.0</p> <p>Fixed in Release: 5.8-3.0.7.0</p>

Internal Reference Number	Description
3344682	<p>Description: If there are multiple encapsulations and not all neighbors are valid, the kernel will go into panic mode.</p> <p>Keywords: ASAP², Kernel Panic</p> <p>Fixed in Release: 5.8-2.0.3.0</p>
3350185	<p>Description: IRQ naming was incorrect for mlx5 interfaces. From now on, the IRQ naming on an inactive channel will be indexed from 0-(n-1).</p> <p>Keywords: Core, IRQ Naming</p>

Internal Reference Number	Description
	Fixed in Release: 5.8-2.0.3.0
3333920	Description: Changing traffic class via the sysfs while modifying QPs in parallel, causes a deadlock.
	Keywords: RDMA, TC, Sysfs, QP
	Fixed in Release: 5.8-2.0.3.0

Internal Reference Number	Description
3253500	Description: The redundant freeing of a list item could lead to memory corruption, potentially causing the application to crash or incorrect traffic handling.
	Keywords: Steering, Memory Corruption, List, Pattern/Argument
	Fixed in Release: 5.8- 1.1.2.1
3214161	Description: The knem-dkms package explicitly requires GCC to build the knem driver (at install times). Under some circumstances, on Debian systems, the apt install method may result in a system that has only gcc-<version> (e.g., gcc-10) installed.
	Keywords: Installation, Debian, GCC
	Fixed in Release: 5.8- 1.1.2.1
3230613	Description: Installing MLNX_OFED_LINUX on an Ubuntu system with CUDA (version < 11.6) may result in an automatic installation of the ucx-cuda package that will fail with an error message in the log file ucx-cuda.debinstall.log about missing dependencies.
	Keywords: Installation, Ubuntu, CUDA
	Fixed in Release: 5.8- 1.1.2.1
3235521	Description: The host driver probe did not check whether there are existing SFs which are present in the device, causing the host driver to not recreate those SFs.
	Keywords: Core, Scalable Functions

Internal Reference Number	Description
	Fixed in Release: 5.8- 1.1.2.1
3228357	Description: If there are multiple encapsulations and not all neighbors are valid, the kernel will go into panic mode.
	Keywords: ASAP ² , Encapsulation
	Discovered in Release: 5.5-1.0.3.2, 5.7-1.0.2.0
	Fixed in Release: 5.8- 1.1.2.1
3232445	Description: When using BlueField with old kernels, multiple OVS meter do not work.
	Keywords: ASAP ² , BlueField, Meter, OVS, Offload
	Fixed in Release: 5.8- 1.1.2.1

Internal Reference Number	Description
3234066	Description: When configuring IPsec full offload, after sending traffic for approximately 30 minutes, the traffic stops at some point and the connection gets lost.
	Keywords: Steering, SMFS, Matcher Disconnect
	Fixed in Release: 5.8- 1.0.1.1
3179535	Description: SMFS will try to merge flow rules with the same matching criteria (as they share the same matcher) into one multi-destination rule. If merging fails, the matcher is disconnected by mistake.
	Keywords: Steering, SMFS, Matcher Disconnect
	Fixed in Release: 5.8- 1.0.1.1
3214198	Description: ibv_reg_mr for huge pages was optimized in kernel >= 5.12
	Keywords: RDMA, ibv_reg_mr

Internal Reference Number	Description
	Discovered in Release: 5.7-1.0.2.0
	Fixed in Release: 5.8- 1.0.1.1
2984134	Description: Moving to SwitchDev mode while deleting namespace over Linux-6.0 can sometimes cause a deadlock.
	Keywords: RDMA, SwitchDev
	Discovered in Release: 5.5-1.0.3.2
	Fixed in Release: 5.8- 1.0.1.1
3106228	Description: A net device validation issue prevented running IPv6 traffic using an RDMA communication manager between two interfaces on same host with same subnet.
	Keywords: RDMA, IPv6, Communication Manager
	Discovered in Release: 5.6-1.0.3.3
	Fixed in Release: 5.8- 1.0.1.1
3151843	Description: In mlx5dv_mkey_check manpage, there is an inaccurate description of signature error handling flow.
	Keywords: RDMA, manpage
	Discovered in Release: 5.7-1.0.2.0
	Fixed in Release: 5.8- 1.0.1.1
3229002	Description: Creating and deleting MRs, caused a kernel slab cache leak issue.
	Keywords: RDMA, Cache
	Discovered in Release: 5.7-1.0.2.0
	Fixed in Release: 5.8- 1.0.1.1
3236217	Description: The rdma res show cm_id command does not list all cm_ids when some of them are in LISTEN state.
	Keywords: RDMA, cm_ids
	Discovered in Release: 5.0-1.0.0.0

Internal Reference Number	Description
	Fixed in Release: 5.8- 1.0.1.1
3146128	Description: In older kernel version, PTP was not supported over VLAN interfaces.
	Keywords: NetDev, PTP, VLAN
	Discovered in Release: 5.7-1.0.2.0
	Fixed in Release: 5.8- 1.0.1.1
2969772	Description: HW-GRO feature was blocked due to firmware limitations.
	Keywords: NetDev, HW-GRO
	Discovered in Release: 5.6-1.0.3.3
	Fixed in Release: 5.8- 1.0.1.1
3096393	Description: STP packets failed to be transmitted.
	Keywords: NetDev, STP
	Discovered in Release: 5.5-1.0.3.2
	Fixed in Release: 5.8- 1.0.1.1
3236984	Description: When using sysfs to read the hash function used to distribute the traffic between the TIRs (Transport Interface Receive), on occasion, the server crashed.
	Keywords: NetDev, sysfs
	Discovered in Release: 5.7-1.0.2.0
	Fixed in Release: 5.8- 1.0.1.1
3126000	Description: Upgrading from version 5.6-2 to 5.7 failed.
	Keywords: Installation
	Discovered in Release: 5.6-2.0.9.0
	Fixed in Release: 5.8- 1.0.1.1

Internal Reference Number	Description
3230524	<p>Description: Building with KMP enabled fails due to missing packages. OFED packages will now be built with KMP disabled.</p>
	<p>Keywords: Installation, KMP</p>
	<p>Fixed in Release: 5.8- 1.0.1.1</p>
3158725	<p>Description: The script install.pl, used for (re)building kernel modules, used the name "kernel-source" as the package of the kernel-source on SLES systems.</p>
	<p>Keywords: Installation, SLES</p>
	<p>Discovered in Release: 5.6-1.0.3.3</p>
<p>Fixed in Release: 5.8- 1.0.1.1</p>	
3142212	<p>Description: Starting firmware version xx.34.0350, a new NVCONFIG has been added to the ARM side only: MANAGEMENT_PF_MODE. If this config is on, the user will see a PCI Function (PF) which failed to probe:</p>
	<pre>[6.837102] mlx5_core 0000:03:00.2: mlx5_cmd_check:756:(pid 206): ENABLE_HCA(0x104) op_mod(0x0) failed, status bad parameter(0x3), syndrome (0x6ca1f5) [6.864227] mlx5_core 0000:03:00.2: mlx5_peer_pf_init:40:(pid 206): Failed to enable peer PF HCA err(-22) [6.883453] mlx5_core 0000:03:00.2: mlx5_load:1129:(pid 206): Failed to init embedded CPU [8.261268] mlx5_core 0000:03:00.2: init_one:1365:(pid 206): mlx5_load_one failed with error code -22 [8.280056] mlx5_core: probe of 0000:03:00.2 failed with error -22</pre>
	<p>Keywords: Installation</p>
	<p>Discovered in Release: 5.7-1.0.2.0</p>
<p>Fixed in Release: 5.8- 1.0.1.1</p>	

Internal Reference Number	Description
3174928	Description: Using a 1-CPU system casues possible command flush deadlock.
	Keywords: Core
	Discovered in Release: 5.6-1.0.3.3
	Fixed in Release: 5.8- 1.0.1.1
3228721/3228357	Description: An incorrect termination table was used with the uplink-to-uplink forward rule.
	Keywords: ASAP ² , eSwitch
	Discovered in Release: 5.7-1.0.2.0
	Fixed in Release: 5.8- 1.0.1.1
3220120	Description: In old kernels, when a VXLAN tunnel is set up on one OVS bridge and PF is up on another OVS bridge, traffic does not offload as expected.
	Keywords: ASAP ² , VXLAN
	Discovered in Release: 5.4-3.0.3.0
	Fixed in Release: 5.8- 1.0.1.1

Known Issues

The following is a list of general limitations and known issues of the current version of the release. For the list of old known issues, please refer to NVIDIA OFED Archived Known Issues file at

http://www.mellanox.com/pdf/prod_software/MLNX_OFED_Archived_Known_Issues.pdf

Internal Ref. Number	Issue
3496799	Description: On SLES systems, when installing using the package management method (zypper or "yum") and the package mpi-selector

Internal Ref. Number	Issue
	<p>was already installed, zypper will prompt about a change of vendor of the package mpi-selector (a dependency of openmpi).</p> <p>Keywords: Installation, SLES</p> <p>Workaround: To run an automated install, remove the original mpi-selector package.</p> <p>Discovered in Release: 5.8-3.0.7.0</p>
3215514	<p>Description: On EulerOS 2.0SP11, installation with the yum method may fail with an error that mlnx-iproute2 is missing a dependency on libdb-5.3.so()(64bit).</p> <p>Keywords: Installation, EulerOS 2.0SP11, yum</p> <p>Workaround: Install in advance the mlnx-iproute2 package with rpm and with the --nodeps option. For example: <code>rpm -Uv --nodeps RPMS/mlnx-iproute2-5.19.0-1.58101.x86_64.rpm</code></p> <p>Discovered in Release: 5.8- 1.0.1.1</p>
3247519	<p>Description: On an Ubuntu 22.04 system, when installing using the apt install method to install MLNX_OFED including Open vSwitch, and if the distribution Open vSwitch package was previously installed, the install may fail because of a left-over systemd generated file: the symbolic link <code>/etc/systemd/system/openswitch-switch.service.requires/ovs-record-hostname.service -> /lib/systemd/system/ovs-record-hostname.service .</code></p> <p>Keywords: Installation, Ubuntu 22.04, Open vSwitch</p> <p>Workaround: Either remove (and purge: <code>apt purge / dpkg --purge</code>) the package <code>openswitch-switch</code> before the installation, or, if encountering this error message, remove the file left over and proceed with the installation: <code>rm file /etc/systemd/system/openswitch-switch.service.requires/ovs-record-hostname.service</code> <code>apt install -f</code></p> <p>Discovered in Release: 5.8- 1.0.1.1</p>
3191223	<p>Description: In old kernels, <code>/etc/init.d/openibd stop</code> will fail because of an existing TC rule. Because <code>mlx5_ib</code> is already unloaded, <code>mlx5_core</code> and <code>mlx5_ib</code> will be in an inconsistent state.</p>

Internal Ref. Number	Issue
	<p>Keywords: ASAP², eSwitch, TC Rules</p> <p>Workaround: Set eSwitch mode to legacy before enabling SR-IOV or reload <code>mlx5_core</code> to change eSwitch mode to legacy.</p> <p>Discovered in Release: 5.8- 1.0.1.1</p>
3199628	<p>Description: <code>ping -6 -i <interface name></code> is broken in v5.18.</p> <p>Keywords: NetDev, -i flag</p> <p>Workaround: In all operating systems that are running Kernel 5.18 and below, remove the -i flag.</p> <p>Discovered in Release: 5.8- 1.0.1.1</p>
3002932	<p>Description: Jumbo MTU must be set on all uplinks (i.e., uplinks of *_sf and *_sf_r) at all times.</p> <p>Keywords: NetDev, MTU, Uplink</p> <p>Workaround: Configure jumbo MTU (9216) on all uplink-related interfaces.</p> <p>Discovered in Release: 5.8- 1.0.1.1</p>
3228788	<p>Description: Users are advised to avoid running rx-tls-offload over Korg6.0 as its TLS module does not work properly.</p> <p>Keywords: NetDev, TLS</p> <p>Workaround: N/A</p> <p>Discovered in Release: 5.8- 1.0.1.1</p>
3130859	<p>Description: The yum install method might be broken on installer regenerated with <code>--add-kernel-support-build-only</code>.</p> <p>Keywords: Installation, yum</p> <p>Workaround: Delete the original <code>mlnx-ofed-all-5.*</code> package and recreate the repository with: <code>createrepo RPMS/</code></p> <p>Discovered in Release: 5.8- 1.0.1.1</p>
3149387	<p>Description: The package <code>neohost-backend</code> (included in <code>MLNX_OFED</code>) has a strict dependency on Python 2.7 and on the existence of</p>

Internal Ref. Number	Issue
	<p data-bbox="418 268 1458 390">/usr/bin/python. This dependency is because of a pre-installation test (which is a rather non-standard method) for /usr/bin/python will fail the installation if without Python 2.7.</p> <p data-bbox="418 401 1422 478">As a result, default installation of this on newer systems that do not have a default of Python 2 has been disabled.</p> <p data-bbox="418 489 1458 695">If there is an explicit request for this installation using the command-line option --with-neohost-backend, this sanity check will be overridden and there will be an attempt to install it regardless. On newer systems, there is likely to not be /usr/bin/python even if Python 2 is installed; as such its installation will fail.</p> <p data-bbox="418 726 911 762">Keywords: Installation, Python 2</p> <p data-bbox="418 793 1458 915">Workaround: If neohost-backend is needed on a newer system, install Python 2 in advance and create the symbolic link /usr/bin/python -> python2.</p> <p data-bbox="418 947 943 982">Discovered in Release: 5.8- 1.0.1.1</p>
3213777	<p data-bbox="418 1010 1414 1131">Description: Oracle Enterprise Linux version 9.0 generates kernel module packages that have dependencies that are not provided by their own kernel RPM packages and thus are not installable.</p> <p data-bbox="418 1163 1192 1199">Keywords: Installation, Oracle Enterprise Linux v9.0</p> <p data-bbox="418 1230 699 1266">Workaround: N/A</p> <p data-bbox="418 1297 943 1333">Discovered in Release: 5.8- 1.0.1.1</p>
3229904	<p data-bbox="418 1360 1328 1482">Description: Restart driver fails to load OFED modules after installing OFED on SLES15sp4 with errata kernel 5.14.21-150400.24.21-default.</p> <p data-bbox="418 1514 760 1549">Keywords: Installation</p> <p data-bbox="418 1581 1219 1617">Workaround: Install OFED with --add-kernel-support flag.</p> <p data-bbox="418 1648 943 1684">Discovered in Release: 5.8- 1.0.1.1</p>
3189424	<p data-bbox="418 1711 1419 1833">Description: VLAN naming is limited to 16 characters (like all other interface names). For names longer than 16 characters, the kernel generates its own interface name VLAN (VID).</p> <p data-bbox="418 1864 1008 1900">Keywords: Core, VLAN, Interface Name</p>

Internal Ref. Number	Issue
	<p>Workaround: Select a name which complies to the 16-characters limitation.</p> <p>Discovered in Release: 5.8- 1.0.1.1</p>
3220855	<p>Description: Creating external SFs on BF ARM when the host (x86) operating system does not support SFs may cause the host to crash.</p> <p>Keywords: Core, Scalable Functions</p> <p>Workaround: N/A</p> <p>Discovered in Release: 5.8- 1.0.1.1</p>
3239291	<p>Description: In some topologies, like logical partitions, mlxfwreset is not supported.</p> <p>Keywords: Core, mlxfwreset</p> <p>Workaround: N/A</p> <p>Discovered in Release: 5.8- 1.0.1.1</p>

Internal Ref. Number	Issue
3114823	<p>Description: The first attempt to create a new iSER connection fails with the following messages in dmesg:</p> <pre>iSCSI Login timeout on Network Portal <iSER_Target_IP_ADDR>:3260 isert: isert_get_login_rx: isert_conn 00000000e9239d52 interrupted before got login req</pre> <p>After the error, the iSER Initiator connects to the Target successfully, but the memory allocated for the first connection is not freed correctly. As a result, the failed attempt also causes memory leakage.</p> <ul style="list-style-type: none"> • kernel.org Kernel 5.18 • RHEL 9.0 • RHEL 8.6 • Ubuntu 22.04 • SLES 15 SP4 <p>The error happens due to a bug in the scsi_transport_iscsi module, which is not a part of</p>

Internal Ref. Number	Issue
	<p>MLNX_OFED. As such, the issue cannot be fixed in MLNX_OFED. The bug is already fixed in kernel 5.19 by the commit f6eed15f3ea7 ("scsi: iscsi: Exclude zero from the endpoint ID range").</p> <p>Workaround: Update the kernel if the above errors are experienced. If the issue is still reproduced after the kernel update, ask your distro support to apply the bug fix from the upstream kernel.</p> <p>Keywords: iSER Initiator</p> <p>Discovered in Release: 5.7-1.0.2.0</p>
3096911	<p>Description: Installing chkconfig on RHEL9.0 with OFED using yum failed (chkconfig creates /etc/init.d sym link and OFED creates files in this directory, causing a conflict).</p> <p>Workaround: Installing chkconfig before OFED.</p> <p>Keywords: Installation</p> <p>Discovered in Release: 5.7-1.0.2.0</p>
3100544	<p>Description: On a RHEL9.x system, in some cases where inbox modules do not match for the drivers being build, rebuilding the drivers (--add-kernel-support) works, but fails to install the built package, with many errors such as: kernel(__rdma_block_iter_next) = 0x8e7528da is needed by mlnx-ofa_kernel-modules-5.6-OFED.5.6.2.0.9.1.kver.5.14.0_70.13.1.el9_0.aarch64.aarch64 This was caused by a bug in the scripts that creates the Requires and Provides headers that is confused by dependencies between different modules of the same external package.</p> <p>Workaround: dnf install kernel-modules- # in case it is not the newest.</p> <p>Keywords: Installation, RHEL9.x</p> <p>Discovered in Release: 5.7-1.0.2.0</p>
3132158	<p>Description: Building rdma-core package on Rocky 8.6 OS caused failure in OFED build.</p> <p>Workaround: N/A</p> <p>Keywords: Installation</p>

Internal Ref. Number	Issue
	Discovered in Release: 5.7-1.0.2.0
3137440	Description: Python package is missing, need to install it manually.
	Workaround: Install Python before starting the build.
	Keywords: Installation, Python
	Discovered in Release: 5.7-1.0.2.0
3141506	Description: kernel-macros package does not support building with KMP enabled. KMP needs to be disabled.
	Workaround: Build and install MOFED with KMP disabled (without --kmp flag).
	Keywords: Installation
	Discovered in Release: 5.7-1.0.2.0
3141506	Description: kernel-macros package does not support building with KMP enabled. KMP needs to be disabled.
	Workaround: Build and install MOFED with KMP disabled (without --kmp flag).
	Keywords: Installation
	Discovered in Release: 5.7-1.0.2.0
3129627	Description: Kernel module packaging is not supported in CtyunOS.
	Workaround: N/A
	Keywords: Installation
	Discovered in Release: 5.7-1.0.2.0
2971708	<p>Description: For OSs in which Devlink supports setting roce-enable/disable, both sysfs roce_enable show and sysfs roce_enable set are disabled, and the RoCE state must be managed exclusively via Devlink.</p> <p>The sysfs interface for roce-enable/disable will be removed entirely for these OSs in a future release.</p> <p>To determine if Devlink can be used to enable or disable RoCE, execute the following console command after starting OFED:</p>

Internal Ref. Number	Issue
	<pre data-bbox="397 262 1461 352">devlink dev param show grep roce</pre> <p data-bbox="397 359 1445 436">Devlink supports roce enable/disable if the following line is reflected in the output:</p> <pre data-bbox="397 443 1461 533">name enable_roce type generic</pre> <p data-bbox="397 539 1396 617">For OSs which do not allow enabling/disabling RoCE via Devlink, the sysfs interface behaves as in the previous 2 releases:</p> <ol data-bbox="443 657 1445 953" style="list-style-type: none"> 1. For OSs which have Devlink reload, but do not allow setting RoCE state via Devlink: sysfs roce_enable show works, as does sysfs roce_enable set, but Devlink reload must be performed after setting the RoCE state via sysfs in order to activate the desired roce state. 2. For OSs which do not have Devlink reload, RoCE state is managed only by the sysfs interface. <p data-bbox="475 959 1461 1037">'show' displays the RoCE state and 'set' sets the state and activates it.</p> <p data-bbox="475 1043 1364 1121">To determine if Devlink dev reload is supported, execute the following console command (using the bash shell):</p> <pre data-bbox="475 1127 1461 1218">devlink dev help 2>&1 grep reload</pre> <p data-bbox="475 1224 1006 1268">Reload is supported if the output is:</p> <pre data-bbox="475 1274 1461 1365">devlink dev reload DEV [netns { PID NAME ID }]</pre>
	Workaround: N/A
	Keywords: Enabling/Disabling RoCE
	Discovered in Release: 5.7-1.0.2.0

Internal Ref. Number	Issue
2998194	<p>Description: On some systems with many (e.g., 64) virtual functions (VFs) attached to a ConnectX interface, 'ip link' may give an error message: "Error: Buffer too small for object." This applies to both IP commands: the inbox iproute package in RHEL8.x and the mlnx-iproute2 package from MLNX_OFED. This is known to work well and not give an error in RHEL7.x kernel regardless of what user-space package is used (including user-space from RHEL8.x).</p>
	<p>Workaround: N/A</p>
	<p>Keywords: NetDev, RHEL, Virtual Functions</p>
	<p>Discovered in Release: 5.6-1.0.3.3</p>
3045436	<p>Description: Rebooting the host while the Arm is down may block the shutdown flow till the Arm is up.</p>
	<p>Workaround: Restart the driver on the host side before reboot.</p>
	<p>Keywords: Reboot, Arm</p>
	<p>Discovered in Release: 5.6-1.0.3.3</p>
3040350	<p>Description:</p> <ol style="list-style-type: none"> 1. When offload is enabled, removing a physical port from ovs-dpdk bridge requires restarting OVS service. Not doing so will result in wrong configuration of datapath rules. 2. When offload is enabled, the physical port must be attached to a bridge.
	<p>Workaround:</p> <ol style="list-style-type: none"> 1. When removing a physical port from an ovs-dpdk bridge while offload is enabled, need to restart openvswitch after reattaching it. 2. Attach physical port to a bridge according to the desired topology.
	<p>Keywords: OVS-DPDK, Bridge, Offload</p>
	<p>Discovered in Release: 5.6-1.0.3.3</p>

Internal Ref. Number	Issue
2973726	Description: dec_ttl only work with ConnectX-6. It does not work with ConnectX-5.
	Workaround: N/A
	Keywords: OVS-DPDK, dec_ttl
	Discovered in Release: 5.6-1.0.3.3
2946873	Description: Moving to switchdev mode while deleting namespace may cause a deadlock.
	Workaround: Unload mlx5_ib module before moving to Switchdev mode.
	Keywords: ASAP ² , Switchdev, Namespace
	Discovered in Release: 5.6-1.0.3.3
2811957	Description: If a system is run from a network boot and is connected to the network storage through an NVIDIA ConnectX card, unloading the mlx5_core driver (such as running '/etc/init.d/openibd restart') will render the system unusable and should therefore be avoided.
	Workaround: N/A
	Keywords: Installation, mlx5_core
	Discovered in Release: 5.6-1.0.3.3
2979243	Description: The kernel in CentOS 7.6alt (for non-x86 architectures) is different than that of RHEL 7.6alt. Some of the MLNX_OFED kernel modules that were built for the RHEL7.6alt kernel will not load on a system with Centos7.6alt kernel. If you want to install MLNX_OFED on such a system, you should use ./mlnxofedinstall --add-kernelsupport to rebuild the kernel modules for the Centos kernel.
	Workaround: Use add-kernel-support.
	Keywords: Installation,CentOS
	Discovered in Release: 5.6-1.0.3.3
3011440	Description: In Debian 11.2, Ubuntu 21.10, and Ubuntu 22.04, attempting to install an "exact" type of metapackage (such as mlnx-

Internal Ref. Number	Issue
	<p>ofed-all-exact or mlnx-ofed-basic-exact) may fail with an error regarding the version of mstflint.</p> <p>Workaround: Install also mstflint of the exact same version (e.g., apt install mlnx-ofed-all-exact mstflint=4.16.0-1.56xxxx).</p> <p>Keywords: Installation, Debian, Ubuntu, MST</p> <p>Discovered in Release: 5.6-1.0.3.3</p>
3024520	<p>Description: The option --copy-ifnames-udev copy some files under /etc (/etc/udev/rules.d/82-net-setup-link.rules and /etc/infiniband/vf-net-link-name.sh) that are never removed--not in the case this option is not given and not upon uninstallation. Those scripts are merely examples. They are files under /etc to be maintained by the user.</p> <p>Workaround: Remove the files, if needed.</p> <p>Keywords: Installation</p> <p>Discovered in Release: 5.6-1.0.3.3</p>
3046601	<p>Description: When rebuilding the kernel modules (--add-kernel-support) for some kernel versions (specifically mainline 4.14) do not unset LDFLAGS properly. Rebuilding xpmem in such a case may fail with the error such as "unrecognized option '-Wl,-z,relro'" in the xpmem build log.</p> <p>Workaround: Either disable building xpmem by adding --without-xpmem to the command line, or edit the kernel Makefile to make it unset LDFLAGS:</p> <pre data-bbox="391 1419 1463 1509">sed -i -e '/^export ARCH/iLDFLAGS :=' /lib/modules/\$(uname -r)/Makefile</pre> <p>Note: The Makefile may be located elsewhere, such as the top-level directory of the kernel source directory.</p> <p>Keywords: Installation, SLES</p> <p>Discovered in Release: 5.6-1.0.3.3</p>
3046655	<p>Description: A package manager upgrade with zypper (on a SLES system) may prompt a question about vendor change from "Mellanox Technologies" to "OpenFabrics".</p>

Internal Ref. Number	Issue
	<p>Workaround: Either accept this when prompted or add the file /etc/zypp/vendors.d/mlnx_ofed with the following content:</p> <pre data-bbox="391 359 1463 501">[main] vendors = Mellanox,OpenFabrics</pre> <p>Keywords: Installation, SLES</p> <p>Discovered in Release: 5.6-1.0.3.3</p>
3048411	<p>Description: After installing OFED with rebuilt kernel modules, error messages indicating that the kernel module mlx5_ib failed to load (e.g. "mlx5_ib: Unknown symbol . . .") appear. These messages could be safely ignored because the module eventually loads.</p> <p>Workaround: Run the command 'dracut -f' to update the initramfs.</p> <p>Keywords: Installation</p> <p>Discovered in Release: 5.6-1.0.3.3</p>
3048444	<p>Description: OFED installation failed using yum for --add-kernel-support option (building packages without KMP enabled) if libfabric package is installed.</p> <p>Workaround: Remove libfabric package before OFED installation or use installation script.</p> <p>Keywords: Installation, RHEL 8.5</p> <p>Discovered in Release: 5.6-1.0.3.3</p>
3015210	<p>Description: OVS topology where the tunnel device is over a VF and the VF representor is connected to a bond is not supported.</p> <p>Workaround: N/A</p> <p>Keywords: ASAP², ConnectX-6 Dx, Tunnel Over VF, LAG, Connection Tracking</p> <p>Discovered in Release: 5.6-1.0.3.3</p>
3028300	<p>Description: OVS metering is not support over kernel 5.17.</p> <p>Workaround: N/A</p>

Internal Ref. Number	Issue
	<p>Keywords: ASAP², OVS, Meter, Kernel 5.17</p> <p>Discovered in Release: 5.6-1.0.3.3</p>
3044255	<p>Description: Destroying mlxdevm group while SF is attached to it is not supported.</p> <p>Workaround: N/A</p> <p>Keywords: ASAP², mlxdevm, QoS, Group, Scalable Functions, ConnectX-6 Dx</p> <p>Discovered in Release: 5.6-1.0.3.3</p>
2900346	<p>Description: On Ubuntu OS, configuring different IP addresses with different subnets to both ports 0 and 1 is currently not supported. When trying to ping from port 0 on one BlueField-2 card to port 0 on the other BlueField-2 card, then both port 0 and port 1 on the receiving side send a reply to the ARP request (a.k.a, ARP flux).</p> <p>Workaround: N/A</p> <p>Keywords: BlueField-2, Ubuntu, ARP Flux</p> <p>Discovered in Release: 5.6-1.0.3.3</p>
3046456	<p>Description: Switching between SwitchDev mode and legacy mode quickly on BlueField-2 can prevent the driver from loading successfully and breaks its health recovery.</p> <p>Workaround: Pause 60 seconds between state-altering commands to guarantee the driver health recovery is completed successfully.</p> <p>Keywords: ASAP², BlueField-2, Health Recovery</p> <p>Discovered in Release: 5.6-1.0.3.3</p>
2934149	<p>Description: Adding vDPA ports over ConnectX-5 devices in ovs-dpdk is not supported and will cause a crash.</p> <p>Workaround: N/A</p> <p>Keywords: OVS-DPDK, ConnectX-5</p> <p>Discovered in Release: 5.6-1.0.3.3</p>

Internal Ref. Number	Issue
2934833	Description: Running I/O traffic and toggling both physical ports status (UP/DOWN) in a stressful manner on the receiving-end machine may cause traffic loss.
	Workaround: N/A
	Keywords: RDMA, Port Toggle
	Discovered in Release: 5.6-1.0.3.3
2901514	Description: Relaxed Ordering is not working properly on Virtual Functions.
	Workaround: N/A
	Keywords: Relaxed Ordering, VF
	Discovered in Release: 5.6-1.0.3.3

Internal Ref. Number	Issue
2870299	Description: Managing SFs is possible using the iproute2 with mlxdevm tool only.
	Workaround: N/A
	Keywords: Scalable Functions
	Discovered in Release: 5.5-1.0.3.2
2869722	Description: OFED packages were built with DKMS disabled since building OFED with DKMS failed due to a problem in the DKMS package on UOS. --dkms flag should not be used.
	Workaround: N/A
	Keywords: Installation, DKMS

Internal Ref. Number	Issue
	Discovered in Release: 5.5-1.0.3.2
2870367	Description: On UOS, IPoIB PKEY may require manual bring up after driver restart.
	Workaround: N/A
	Keywords: Installation, IPoIB, PKEY
	Discovered in Release: 5.5-1.0.3.2
2836032	Description: When using Software steering mlx5dv_dr API to create rules containing encapsulation actions in MLNX_OFED v5.5-1.x.x.x, upgrade firmware to the latest version. Otherwise, the maximum number of encapsulation actions that can be created will be limited to only 16K, and degradation for the rule insertion rate is expected compared to MLNX_OFED v5.4-.x.x.x.x.
	Workaround: N/A
	Keywords: Software Steering
	Discovered in Release: 5.5-1.0.3.2
2851639	Description: Enabling ARFS in legacy mode and then moving to switchdev mode is not supported and may cause unwanted behavior.
	Workaround: N/A
	Keywords: NetDev, ARFS
	Discovered in Release: 5.5-1.0.3.2
2851639	Description: nvme and iser are not enabled on UOS ARM, because of missing UOS kernel support.
	Workaround: N/A
	Keywords: nvme, iser, UOS ARM
	Discovered in Release: 5.5-1.0.3.2
2860855	Description: Building OFED on RHEL 8.4 with kmp disabled and then installing with yum fails due to some conflicting packages.
	Workaround: Remove libfabric and librpmem packages before OFED installation, or add --allowerase option to the installation command.

Internal Ref. Number	Issue
	Keywords: Installation, RHEL 8.4, kmp, yum
	Discovered in Release: 5.5-1.0.3.2
2865983	Description: OFED packages were built with kmp disabled. Building with kmp enabled fails due to missing packages.
	Workaround: N/A
	Keywords: Installation, kmp
	Discovered in Release: 5.5-1.0.3.2

Internal Ref. Number	Issue
2658644	Description: Only match on lower 32 bit of ct_label is supported.
	Workaround: N/A
	Keywords: ASAP ² , Connection Tracking
	Discovered in Release: 5.4-1.0.3.0
2706345	Description: Number of RQ and TIR allocation in the driver depends on total number of MSI-X vectors allocated. Total number of TIRs supported by device is 16K range. Each representor needs number of CPUs worth TIRs, upto maximum of 128.
	Workaround: To use large number of VFs, set PF_NUM_PF_MSIX to a smaller value of around 32.
	Keywords: ASAP ² , VF, PF_NUM_PF_MSIX
	Discovered in Release: 5.4-1.0.3.0
2836997	<p>Description: An automatic test that checks a flow meter rate fluctuation stays within a fixed threshold (e.g., 10%) may fail because meter precision is dependent on multiple factors (i.e., rate and burst values and shape of the traffic).</p> <p>To pick the best configuration parameters for a flow meter, perform a couple of test measurements using different values of burst size against expected traffic workload and average the results over an extended period of time (tens of minutes).</p>

Internal Ref. Number	Issue
	<p>Workaround: N/A</p> <p>Keywords: ASAP², Meter Threshold</p> <p>Discovered in Release: 5.4-1.0.3.0</p>
2863456	<p>Description: SA limit by packet count (hard and soft) are supported only on traffic originated from the ECPF. Trying to configure them on VF traffic will remove the SA when hard limit is hit, however traffic could still pass as plain text due to the tunnel offload that is used in such configuration.</p> <p>Workaround: N/A</p> <p>Keywords: ASAP², IPsec Full Offload</p> <p>Discovered in Release: 5.4-0.5.1.1</p>
2657392	<p>Description: OFED installation caused CIFS to break in RHEL8.4 and RHEL8.5. A dummy module was added so that CIFS will be disabled after OFED installation in RHEL8.4 and RHEL8.5.</p> <p>Workaround: N/A</p> <p>Keywords: Installation, RHEL8.4, RHEL8.5, CIFS</p> <p>Discovered in Release: 5.4-0.5.1.1</p>
2800993	<p>Description: OpenMPI does not support running across different operating systems and/or CPU architectures.</p> <p>Workaround: N/A</p> <p>Keywords: OpenMPI</p>
2399503	<p>Description: Open vSwitch is not supported on the latest operating systems containing only Python3 support.</p> <p>Workaround: N/A</p> <p>Keywords: Python, Open vSwitch</p>
2657392	<p>Description: OFED installation caused CIFS to break in RHEL8.4. A dummy module was added so that CIFS will be disabled after OFED installation in RHEL8.4.</p>

Internal Ref. Number	Issue
	Workaround: N/A
	Keywords: Installation, RHEL8.4, CIFS
	Discovered in Release: 5.4-0.5.1.1
2782406	Description: Running yum update will upgrade kylin-release to a higher version. The version of this package is used for kylin10sp2 detection so the script will detect kylin 10 instead of kylin10sp2 and use its repository by mistake.
	Workaround: Because there are no special cases for kylin10sp2, the repository that was detected with adding --add-kernel-support to the installation command can be used.
	Keywords: Upgrade, kylin
	Discovered in Release: 5.4-3.0.3.0
2755632	Description: On dual port cards with SR-IOV, when one port link is configured to InfiniBand and the other port link is configured to Ethernet, the Ethernet port will not be able to support VST and QinQ.
	Workaround: N/A
	Keywords: SR-IOV, VST, QinQ
	Discovered in Release: 5.4-3.0.3.0
2780436	Description: Non-default MTU (>1500) is not supported with IPsec crypto offload and may cause packet drops.
	Workaround: N/A
	Keywords: IPsec, Crypto Offload, MTU
	Discovered in Release: 5.4-3.0.3.0
2726021	Description: Building packages on openEuler with kmp enabled requires kernel-rpm-macros package installed. kernel-rpm-macros-30-13.oe1 does not support -p option and kernel-rpm-macros-30-18.oe1 should be installed instead. On kylin OS, the version of kernel-rpm-macros package does not support -p option needed to support kmp, so it will stay disabled.
	Workaround: N/A

Internal Ref. Number	Issue
	Keywords: Installation, openEuler
	Discovered in Release: 5.4-3.0.3.0

Internal Ref. Number	Issue
2750653	Description: Running fragmented traffic in RHEL 8.3 (4.18.0-240.el8.x86_64) may cause call trace in build_skb.
	Workaround: Update to RHEL 8.3 z-stream 4.18.0-240.22.1.el8_3.x86_64.
	Keywords: RHEL 8.3, Kernel Panic, Call Trace, fr
	Discovered in Release: 5.4-1.0.3.0
2629375	Description: Matching on CT label is only supported when matching on lower 32 bits. Full match on all 128 bits of CT label is not supported.
	Workaround: N/A
	Keywords: ASAP ² , Connection Tracking, Label
	Discovered in Release: 5.4-1.0.3.0
2707997	Description: Installation in the package manager mode under SLES 15.x may require user-intervention if the original libibverbs is installed.
	Workaround: zypper install --force-resolution mlnx-ofed-all
	Keywords: Installation, libibverbs
	Discovered in Release: 5.4-1.0.3.0
2708531	Description: Installation in the package manager mode under SLES 15.x may require user-intervention if the original libopenvswitch is installed.
	Workaround: zypper install --force-resolution mlnx-ofed-all
	Keywords: Installation

Internal Ref. Number	Issue
	Discovered in Release: 5.4-1.0.3.0
2703043	Description: Congested TCP lock for kTLS TX device offload traffic compromises the performance.
	Workaround: Disable TCP selective acknowledgement: echo 0 > /proc/sys/net/ipv4/tcp_sack
	Keywords: kTLS TX
	Discovered in Release: 5.4-1.0.3.0
2676405	Description: If the package interface-rename is active (on XenServer, for example), the interface renaming by the OFED will not be done to eliminate conflicts.
	Workaround: N/A
	Keywords: Interface Renaming
	Discovered in Release: 5.4-1.0.3.0
2687943	Description: Offload of rules which redirect from VF on one PF to VF on second PF is not supported on socket-direct devices.
	Workaround: N/A
	Keywords: ASAP ² , Socket-Direct
	Discovered in Release: 5.4-1.0.3.0
2678672	Description: When disabling switchdev mode, the qdisc in tunnel device cannot be destroyed and mlx5e_stats_flower() is still called by OVS resulting in NULL pointer panic and memory leak.
	Workaround: N/A
	Keywords: SwitchDev, mlx5, Tunnel Traffic
	Discovered in Release: 5.4-1.0.3.0
2566548	Description: On PPC systems when EEH is enabled, running fw sync reset (either by mlx5fwreset with flag --sync 1 or by devlink dev reload action fw_activate), the EEH may catch the PCI reset and take ownership on the flow. When run few times in sequence, the EEH may also decide to disable the device.

Internal Ref. Number	Issue
	<p>Workaround: Administrator may disable EEH before running firmware sync reset on the device.</p> <p>Keywords: PPC, EEH</p> <p>Discovered in Release: 5.4-1.0.3.0</p>
2617950	<p>Description: TX port timestamp feature is supported for kernel versions 3.15 and greater. On older kernel versions, the feature will not be supported and ptp_tx_* counters will not increment.</p> <p>Workaround: N/A</p> <p>Keywords: Ethtool</p> <p>Discovered in Release: 5.4-1.0.3.0</p>
2390731	<p>Description: Ethtool does not display Port Speed advertised/capability above 100Gb/s over and below kernels 5.0, even when supported.</p> <p>Workaround: N/A</p> <p>Keywords: Ethtool, Port Speed</p> <p>Discovered in Release: 5.4-1.0.3.0</p>

Internal Ref. Number	Issue
2687198	<p>Description: Activating VF/SF LAG when at least one VF/SF is still bound may lead to an internal error in the firmware.</p> <p>Workaround: Make sure all VFs/SFs are unbound prior to VF/SF LAG activation/deactivation.</p> <p>Keywords: VF, SF, Firmware, Binding</p> <p>Discovered in Release: 5.4-1.0.3.0</p>

Internal Ref. Number	Issue
2585575	<p>Description: After disabling sync reset by setting enable_remote_dev_reset to false, running firmware sync reset a few</p>

Internal Ref. Number	Issue
	<p>times may lead to general protection fault and system may get stuck.</p> <p>Workaround: N/A</p> <p>Keywords: Firmware Upgrade</p> <p>Discovered in Release: 5.3-1.0.0.1</p>
2582565	<p>Description: Conducting a firmware reset or unbinding the PF while in switchdev mode may cause a kernel crash.</p> <p>Workaround: N/A</p> <p>Keywords: SwitchDev, ASAP², Unbind, Firmware Reset</p> <p>Discovered in Release: 5.3-1.0.0.1</p>
2587802	<p>Description: PTP synchronization may be lost while using tx_port_ts private flag.</p> <p>Workaround: Toggle private flag: ethtool --set-priv-flags tx_port_ts off ethtool --set-priv-flags tx_port_ts on restart ptp4l application</p> <p>Keywords: PTP Synchronization</p> <p>Discovered in Release: 5.3-1.0.0.1</p>
2574943	<p>Description: When running kernel 5.8 and bellow or RHEL 8.2 and below, sampled packets do not support tunnel information.</p> <p>Workaround: N/A</p> <p>Keywords: ASAP², sFLOW</p> <p>Discovered in Release: 5.3-1.0.0.1</p>
2568417	<p>Description: Upon upgrade to version 5.3, the package manager tool will install the new packages and then remove the old packages, a depmod WARNING on "mlx5_fpga_tools" will appear. This warning can be safely ignored. mlx5_fpga_tools is a module that existed in version 5.2 and was removed in 5.3.</p> <p>Workaround: N/A</p> <p>Keywords: Upgrade; mlx5_fpga_tools</p>

Internal Ref. Number	Issue
	Discovered in Release: 5.3-1.0.0.1
2506425	<p>Description: When installing kmod packages on EulerOS 2.0SP9 or OpenEuler 20.03, the following error appears: "modprobe: FATAL: could not get modversions of ". This error can be safely ignored. It is caused by incorrectly adding directories to a list of modules processed by /usr/sbin/weak-modules.</p> <p>Workaround: N/A</p> <p>Keywords: Installation; modules; kmod</p> <p>Discovered in Release: 5.3-1.0.0.1</p>
2492509	<p>Description: When installing the driver on OpenEuler or on EulerOS 2.0SP9, rebuilding the drivers (--add-kernel-support) with the --kmp option (to create kmod packages) generates packages that are uninstallable because they have a dependency on "/sbin/depmod" that the system does not provide. This dependency is created by a buggy kmod package building tool included with the distribution.</p> <p>Workaround: N/A</p> <p>Keywords: add-kernel-support</p> <p>Discovered in Release: 5.3-1.0.0.1</p>
2479327	<p>Description: On SLES 12 SP5, if the kernel was upgraded to 4.12.14-122.46, it is not possible to rebuild kernel modules (--add-kernel-support) without upgrading gcc as well to at least 4.8.5-31.23.2.</p> <p>Workaround: N/A</p> <p>Keywords: Upgrade; SLES 12; add-kernel-support</p> <p>Discovered in Release: 5.3-1.0.0.1</p>
2584441	<p>Description: On SLES 12 SP5, if the kernel was upgraded to 4.12.14-122.46, it is not possible to rebuild kernel modules (--add-kernel-support) without upgrading gcc as well to at least 4.8.5-31.23.2.</p> <p>Workaround: N/A</p> <p>Keywords: Upgrade; SLES 12; add-kernel-support</p> <p>Discovered in Release: 5.3-1.0.0.1</p>

Internal Ref. Number	Issue
2460865	Description: When setting MTU to low values, such as 68 bytes, packets may fail on oversize.
	Workaround: N/A
	Keywords: MTU
	Discovered in Release: 5.3-1.0.0.1
2383318	Description: On kernels based on RedHat 7.2, the "tx_port_ts" feature, as set by ethtool —set-priv-flags, is disabled.
	Workaround: N/A
	Keywords: RedHat; tx_port_ts
	Discovered in Release: 5.3-1.0.0.1
2575647	Description: An OvS-DPDK crash might occur while doing live-migration for VMs that use virtio-interfaces that are accelerated using OvS-DPDK vDPA ports.
	Workaround: N/A
	Keywords: OvS-DPDK vDPA, Live-migration
	Discovered in Release: 5.3-1.0.0.1

Internal Ref. Number	Issue
2430071	Description: After reloading devlink in IPoIB setup, the IB link may stay in initialization state and require to run OpenSM to get the IB link to active state.
	Workaround: N/A
	Keywords: IPoIB devlink reload
	Discovered in Release: 5.2-2.2.0.0
2302786	Description: On EulerOS 2.0 SP9 systems, the kernel ABI (kABI) between the base vhulk2006 kernel and the errata vhulk2008 kernel has been changed. It is now not possible to install MLNX_OFED compiled with KMP on vhulk2006 kernel on a vhulk2008 system.

Internal Ref. Number	Issue
	<p>Workaround: Install MLNX_OFED with --add-kernel-support.</p> <p>Keywords: EulerOS; kABI; installation; --add-kernel-support</p> <p>Discovered in Release: 5.2-1.0.4.0</p>
2398281	<p>Description: A crash in the TLS Rx socket cleanup flow may occur due to a kernel issue where a wrong extra call to tls_dev_del is made.</p> <p>Workaround: N/A</p> <p>Keywords: TLS RX device offload</p> <p>Discovered in Release: 5.2-1.0.4.0</p>
2407415	<p>Description: OpenEuler 20.03 Aarch64 with errata kernels 4.19.90-2011.6.0.0049.oe1.aarch64 and 4.19.90-2012.5.0.0054.oe1.aarch64 are incompatible with MLNX_OFED kmod-mlnx-ofa_kernel.</p> <p>Workaround: Install MLNX_OFED with --add-kernel-support.</p> <p>Keywords: OpenEuler; Aarch64; installation; --add-kernel-support</p> <p>Discovered in Release: 5.2-1.0.4.0</p>
2348077	<p>Description: RDMA device name for VFs may change after resetting all VFs at once.</p> <p>Workaround: Either reset interfaces one by one with a delay in between, or use a network interface naming scheme with predictable interface names, such as NAME_PCI or NAME_GUID. Copy /lib/udev/rules.d/60-rdma-persistent-naming.rules to /etc/udev/rules.d/ and edit the last line accordingly. Note that this will change interface names.</p> <p>Keywords: RDMA; VF</p> <p>Discovered in Release: 5.2-1.0.4.0</p>
2381713	<p>Description: esp4_offload and esp6_offload modules are expected to be loaded according to the list determined by the default kernel. However, these modules cannot be loaded when working over Debian 10 with non-default custom kernel as they are not included in it.</p> <p>Workaround: Either install MLNX_OFED using --add-kernel-support, or rebuild the non-default custom kernel to include these modules.</p>

Internal Ref. Number	Issue
	<p>Keywords: esp4_offload; esp6_offload; kernel, Debian</p> <p>Discovered in Release: 5.2-1.0.4.0</p>
2382898	<p>Description: On kernel 4.14, there is no traffic for UDP or TCP with payload size larger than 1398 on GENEVE IPv6 over VLAN tag interface.</p> <p>Workaround: N/A</p> <p>Keywords: GENEVE; stag; VLAN; UDP</p> <p>Discovered in Release: 5.2-1.0.4.0</p>
2326155	<p>Description: When toggling the link state while running RoCE traffic, the below warning may appear in the dmesg: _ib_cache_gid_add: unable to add gid <gid> error=-28</p> <p>Workaround: N/A</p> <p>Keywords: RoCE; _ib_cache_gid_add</p> <p>Discovered in Release: 5.2-1.0.4.0</p>
2329654	<p>Description: Running XDP over an IP tunnel may fail when working with kernels as old as version 4.14.</p> <p>Workaround: N/A</p> <p>Keywords: XDP, Kernel</p> <p>Discovered in Release: 5.2-1.0.4.0</p>
2249156	<p>Description: MLNX_OFED installation will remove qperf package in case it was done after qperf installation.</p> <p>Workaround: Make sure to install qperf package after installing MLNX_OFED, or re-install qperf after installing MLNX_OFED.</p> <p>Keywords: Installation; qperf</p> <p>Discovered in Release: 5.2-1.0.4.0</p>
2355956	<p>Description: OFED installation requires kernel config CONFIG_DEBUG_INFO to be set.</p> <p>Workaround: N/A</p> <p>Keywords: Installation; CONFIG_DEBUG_INFO</p>

Internal Ref. Number	Issue
	Discovered in Release: 5.2-1.0.4.0
2362781	Description: Openibd may fail to unload the Inbox driver mlx5_ib on Ubuntu 18.04 PPC Boston server due to a bug in the Inbox drivers.
	Workaround: N/A
	Keywords: Openibd; Inbox; Ubuntu; mlx5_ib
	Discovered in Release: 5.2-1.0.4.0
2367659	Description: Upgrading the MLNX_OFED version that is configured as a YUM repository may yield warning messages from depmod about unknown symbols, such as: depmod: WARNING: /lib/modules/4.18.0-240.el8.x8664/extra/iser/ib_iser.ko needs unknown symbol ib_fmr_pool_unmap depmod: WARNING: /lib/modules/4.18.0-240.el8.x8664/extra/srp/ib_srp.ko needs unknown symbol ib_create_qp_user These warnings appear since the RPM packages upgrade occurs sequentially, and there is an upgrade dependency between some of the modules, which would create a state of upgrade inconsistency. These warnings are temporary and can be ignored as eventually all modules will be upgraded, and the warnings will no longer appear.
	Workaround: N/A
	Keywords: YUM; RPM; symbol; depmod; ISER; SRP
	Discovered in Release: 5.2-1.0.4.0
2385269	Description: The number of connections offloaded is limited to 100K when working with Kernel v5.9.
	Workaround: N/A
	Keywords: ASAP2; Connection Tracking; Kernel
	Discovered in Release: 5.2-1.0.4.0
2393169	Description: Mirroring is not supported with Connection Tracking when the source port is a VxLAN device.
	Workaround: N/A
	Keywords: ASAP ² ; Connection Tracking; Mirroring

Internal Ref. Number	Issue
	Discovered in Release: 5.2-1.0.4.0
2395082	Description: A call trace may take place when moving from SwitchDev mode back to Legacy mode in Kernel v5.9 due to a kernel issue in tcf_block_unbind.
	Workaround: N/A
	Keywords: ASAP ² ;SwitchDev; call trace; kernel; tcf_block_unbind
	Discovered in Release: 5.2-1.0.4.0

Internal Ref. Number	Issue
2354899	Description: ODP is not supported on RHEL7.x systems when running over an ETH link layer with RoCE disabled.
	Workaround: N/A
	Keywords: ODP, RHEL, RoCE
	Discovered in Release: 5.1-2.5.8.0
2338150	Description: Scatter to CQE feature should be disabled for the GPUDirect tests to work.
	Workaround: Set the MLX5_SCATTER_TO_CQE environment variable to 0 before the ib_send_bw command. For example: MLX5_SCATTER_TO_CQE=0 ib_send_bw -d <...>
	Keywords: CQE, GPUDirect
	Discovered in Release: 5.1-2.5.8.0
2295732	Description: Upgrading from legacy (mlnx-libs) to the current rdma-core based build using YUM (package manager) fails.
	Workaround: To perform this upgrade, either use the installer script or uninstall the old packages and install the new packages.
	Keywords: Legacy, mlnx-libs, rdma-core, installation
	Discovered in Release: 5.1-2.5.8.0

Internal Ref. Number	Issue
2295735	Description: Upgrading from legacy (mlnx-libs) to the current rdma-core based build using the apt-get (package manager) fails.
	Workaround: To perform this upgrade, either use the installer script or uninstall the old packages and install the new packages.
	Keywords: Legacy, mlnx-libs, rdma-core, apt, apt-get, installation
	Discovered in Release: 5.1-2.5.8.0
2248996	Description: Downgrading the firmware version for ConnectX-6 cards using "mlnx_ofed_install --fw-update-only --force-fw-update" fails.
	Workaround: Manually downgrade the firmware version - please see Firmware Update Instructions .
	Keywords: Firmware, ConnectX-6
	Discovered in Release: 5.1-0.6.6.0
2175930	Description: When using OFED 5.1 on PPC architectures with kernels v5.5 or v5.6 and an old ethtool utility, a harmless warning call trace may appear in the dmesg due to mismatch between user space and kernel. The warning call trace mentions ethtool_notify.
	Workaround: Update the ethtool utility to version 5.6 on such systems in order to avoid the call trace.
	Keywords: PPC, ethtool_notify, kernel
	Discovered in Release: 5.1-0.6.6.0
2198764	Description: If MLNX_OFED is installed on a Debian or Ubuntu system that is run in chroot environment, the openibd service will not be enabled. If the chroot files are being used as a base of a full system, the openibd service is left disabled.
	Workaround: Currently, openibd is a sysv-init script that you can enable manually by running: update-rc.d openibd defaults
	Keywords: chroot, Debian , Ubuntu, openibd
	Discovered in Release: 5.1-0.6.6.0
2237134	Description: Running connection tracking (CT) with FW steering may cause CREATE_FLOW_TABLE command to fail with syndrome.

Internal Ref. Number	Issue
	<p>Workaround: Configure OVS to use a single handler-thread: #ovs-vsctl set Open_vSwitch . other_config:n-handler-threads=1</p> <p>Keywords: Connection tracking, ASAP, OVS, FW steering</p> <p>Discovered in Release: 5.1-0.6.6.0</p>
2239894	<p>Description: Running OpenVSwitch offload with high traffic throughput can cause low insertion rate due to high CPU usage.</p> <p>Workaround: Reduce the number of combined channels of the uplink using "ethtool -L".</p> <p>Keywords: Insertion rate, ASAP2</p> <p>Discovered in Release: 5.1-0.6.6.0</p>
2240671	<p>Description: Header rewrite action is not supported over RHEL/CentOS 7.4.</p> <p>Workaround: N/A</p> <p>Keywords: ASAP, header rewrite, RHEL, RedHat, CentOS, OS</p> <p>Discovered in Release: 5.1-0.6.6.0</p>
2242546	<p>Description: Tunnel offload (encap/decap) may cause kernel panic if nf_tables module is not probed.</p> <p>Workaround: Make sure to probe the nf_tables module before inserting any rule.</p> <p>Keywords: Kernel v5.7, ASAP, kernel panic</p> <p>Discovered in Release: 5.1-0.6.6.0</p>
2143007	<p>Description: IPsec packets are dropped during heavy traffic due to a bug in net/xfrm Linux Kernel.</p> <p>Workaround: Make sure the Kernel is modified to apply the following patch: "xfrm: Fix double ESP trailer insertion in IPsec crypto offload".</p> <p>Keywords: IPsec, xfrm</p> <p>Discovered in Release: 5.1-0.6.6.0</p>
2225952	<p>Description: VF mirroring with TC policy skip_sw is not supported on</p>

Internal Ref. Number	Issue
	RHEL/CentOS 7.4, 7.5 and 7.6 OSs.
	Workaround: N/A
	Keywords: ASAP ² , Mirroring, RHEL, RedHat, OS
	Discovered in Release: 5.1-0.6.6.0
2216521	Description: After upgrading MLNX_OFED from v5.0 or earlier, ibdev2netdev utility changes the installation prefix to /usr/sbin. Therefore, it cannot be found while found in the same SHELL environment.
	Workaround: After installing MLNX_OFED, log out and log in again to refresh the SHELL environment.
	Keywords: ibdev2netdev
	Discovered in Release: 5.1-0.6.6.0
2202520	Description: Rules with VLAN push/pop, encap/decap and header rewrite actions together are not supported.
	Workaround: N/A
	Keywords: ASAP ² , SwitchDev, VLAN push/pop, encap/decap, header rewrite
	Discovered in Release: 5.1-0.6.6.0
2210752	Description: Switching from Legacy mode to SwitchDev mode and vice-versa while TC rules exist on the NIC will result in failure.
	Workaround: Before attempting to switch mode, make sure to delete all TC rules on the NIC or stop OpenvSwitch.
	Keywords: ASAP ² , Devlink, Legacy SR-IOV
	Discovered in Release: 5.1-0.6.6.0

Internal Ref. Number	Issue
2125036/2125031	Description: Upgrading the MLNX_OFED from an UPSTREAM_LIBS based version to an MLNX_LIBS based version fails unless the driver is

Internal Ref. Number	Issue
	<p>uninstalled and then re-installed.</p> <p>Workaround: Make sure to uninstall and re-install MLNX_OFED to complete the upgrade.</p> <p>Keywords: Installation, UPSTREAM_LIBS, MLNX_LIBS</p> <p>Discovered in Release: 5.0-2.1.8.0</p>
2105447	<p>Description: hns_roce warning messages will appear in the dmesg after reboot on Euler2 SP3 OSs.</p> <p>Workaround: N/A</p> <p>Keywords: hns_roce, dmesg, Euler</p> <p>Discovered in Release: 5.0-2.1.8.0</p>
2110321	<p>Description: Multiple driver restarts may cause IPoIB soft lockup.</p> <p>Workaround: N/A</p> <p>Keywords: Driver restart, IPoIB</p> <p>Discovered in Release: 5.0-2.1.8.0</p>
2112251	<p>Description: On kernels 4.10-4.14, when Geneve tunnel's remote endpoint is defined using IPv6, packets larger than MTU are not fragmented, resulting in no traffic sent.</p> <p>Workaround: Define geneve tunnel's remote endpoint using IPv4.</p> <p>Keywords: Kernel, Geneve, IPv4, IPv6, MTU, fragmentation</p> <p>Discovered in Release: 5.0-2.1.8.0</p>
2102902	<p>Description: A kernel panic may occur over RH8.0-4.18.0-80.el8.x86_64 OS when opening kTLS offload connection due to a bug in kernel TLS stack.</p> <p>Workaround: N/A</p> <p>Keywords: TLS offload, mlx5e</p> <p>Discovered in Release: 5.0-2.1.8.0</p>
2111534	<p>Description: A Kernel panic may occur over Ubuntu19.04-5.0.0-38-generic OS when opening kTLS offload connection due to a bug in the</p>

Internal Ref. Number	Issue
	<p>Kernel TLS stack.</p> <p>Workaround: N/A</p> <p>Keywords: TLS offload, mlx5e</p> <p>Discovered in Release: 5.0-2.1.8.0</p>
2035950	<p>Description: An internal error might take place in the firmware when performing any of the following in VF LAG mode, when at least one VF of either PF is still bound/attached to a VM.</p> <ol style="list-style-type: none"> 1. Removing PF from the bond (using ifdown, ip link or any other function) 2. Attempting to disable SR-IOV <p>Workaround: N/A</p> <p>Keywords: VF LAG, binding, firmware, FW, PF, SR-IOV</p> <p>Discovered in Release: 5.0-1.0.0.0</p>
2044544	<p>Description: When working with OSs with Kernel v4.10, bonding module does not allow setting MTUs larger than 1500 on a bonding interface.</p> <p>Workaround: Upgrade your Kernel version to v4.11 or above.</p> <p>Keywords: Bonding, MTU, Kernel</p> <p>Discovered in Release: 5.0-1.0.0.0</p>
1882932	<p>Description: Libibverbs dependencies are removed during OFED installation, requiring manual installation of libraries that OFED does not reinstall.</p> <p>Workaround: Manually install missing packages.</p> <p>Keywords: libibverbs, installation</p> <p>Discovered in Release: 5.0-1.0.0.0</p>
2058535	<p>Description: ibdev2netdev command returns duplicate devices with different ports in SwitchDev mode.</p> <p>Workaround: Use /opt/mellanox/iproute2/sbin/rdma link show command instead.</p>

Internal Ref. Number	Issue
	<p>Keywords: ibdev2netdev</p> <p>Discovered in Release: 5.0-1.0.0.0</p>
2072568	<p>Description: In RHEL/CentOS 7.2 OSs, adding drop rules when act_gact is not loaded may cause a kernel crash.</p> <p>Workaround: Preload all needed modules to avoid such a scenario (cls_flower, act_mirred, act_gact, act_tunnel_key and act_vlan).</p> <p>Keywords: RHEL/CentOS 7.2, Kernel 4.9, call trace, ASAP</p> <p>Discovered in Release: 5.0-1.0.0.0</p>
2093698	<p>Description: VF LAG configuration is not supported when the NUM_OF_VFS configured in mlxconfig is higher than 64.</p> <p>Workaround: N/A</p> <p>Keywords: VF LAG, SwitchDev mode, ASAP</p> <p>Discovered in Release: 5.0-1.0.0.0</p>
2093746	<p>Description: Devlink health dumps are not supported on kernels lower than v5.3.</p> <p>Workaround: N/A</p> <p>Keywords: Devlink, health report, dump</p> <p>Discovered in Release: 5.0-1.0.0.0</p>
2000590	<p>Description: Sending packets larger than MTU is not supported when working with OVS-DPDK.</p> <p>Workaround: N/A</p> <p>Keywords: MTU, OVS-DPDK</p> <p>Discovered in Release: 5.0-1.0.0.0</p>
2062900	<p>Description: Moving VF from SwitchDev mode to Legacy mode while the representor is being used by OVS-DPDK results in a segmentation fault.</p> <p>Workaround: To move VF to Legacy mode with no error, make sure to delete the ports from the OVS.</p> <p>Keywords: SwitchDev, Legacy, representor, OVS-DPDK</p>

Internal Ref. Number	Issue
	Discovered in Release: 5.0-1.0.0.0
2075942	Description: Huge pages configuration is lost each time the server is configured.
	Workaround: Re-configure the huge pages after each reboot, or configure them as a kernel parameter.
	Keywords: Huge pages, reboot, OVS-DPDK
	Discovered in Release: 5.0-1.0.0.0
2067012	Description: MLNX_OFED cannot be installed on Debian 9.11 OS in SwitchDev mode.
	Workaround: Install OFED with the flag --add-kernel-support.
	Keywords: ASAP, SwitchDev, Debian, Kernel
	Discovered in Release: 5.0-1.0.0.0
2036572	Description: When using a thread domain and the lockless rdma-core ibv_post_send path, there is an additional CPU penalty due to required barriers around the device MMIO buffer that were omitted in MLNX_OFED.
	Workaround: N/A
	Keywords: rdma-core, write-combining, MMIO buffer
	Discovered in Release: 5.0-1.0.0.0

Internal Ref. Number	Issue
-	Description: The argparse module is installed by default in Python versions =>2.7 and >=3.2. In case an older Python version is used, the argparse module is not installed by default.
	Workaround: Install the argparse module manually.

Internal Ref. Number	Issue
	<p>Keywords: Python, MFT, argparse, installation</p> <p>Discovered in Release: 4.7-3.2.9.0</p>
1997230	<p>Description: Running mlxfwreset or unloading mlx5_core module while kontrak flows are offloaded may cause a call trace in the kernel.</p> <p>Workaround: Stop OVS service before calling mlxfwreset or unloading mlx5_core module.</p> <p>Keywords: Kontrak, ASAP, OVS, mlxfwrest, unload</p> <p>Discovered in Release: 4.7-3.2.9.0</p>
1955352	<p>Description: Moving 2 ports to SwitchDev mode in parallel is not supported.</p> <p>Workaround: N/A</p> <p>Keywords: ASAP, SwitchDev</p> <p>Discovered in Release: 4.7-3.2.9.0</p>
1979958	<p>Description: VxLAN IPv6 offload is not supported over CentOS/RHEL v7.2 OSs.</p> <p>Workaround: N/A</p> <p>Keywords: Tunnel, VXLAN, ASAP, IPv6</p> <p>Discovered in Release: 4.7-3.2.9.0</p>
1991710	<p>Description: PRIO_TAG_REQUIRED_EN configuration is not supported and may cause call trace.</p> <p>Workaround: N/A</p> <p>Keywords: ASAP, PRIO_TAG, mstconfig</p> <p>Discovered in Release: 4.7-3.2.9.0</p>
1967866	<p>Description: Enabling ECMP offload requires the VFs to be unbound and VMs to be shut down.</p> <p>Workaround: N/A</p> <p>Keywords: ECMP, Multipath, ASAP²</p>

Internal Ref. Number	Issue
	Discovered in Release: 4.7-3.2.9.0
1921981	Description: On Ubuntu, Debian and RedHat 8 and above OSS, parsing the mfa2 file using the mstarchive might result in a segmentation fault.
	Workaround: Use mlxarchive to parse the mfa2 file instead.
	Keywords: MFT, mfa2, mstarchive, mlxarchive, Ubuntu, Debian, RedHat, operating system
	Discovered in Release: 4.7-1.0.0.1
1840288	Description: MLNX_OFED does not support XDP features on RedHat 7 OS, despite the declared support by RedHat.
	Workaround: N/A
	Keywords: XDP, RedHat
	Discovered in Release: 4.7-1.0.0.1
1821235	Description: When using mlx5dv_dr API for flow creation, for flows which execute the "encapsulation" action or "push vlan" action, metadata C registers will be reset to zero.
	Workaround: Use the both actions at the end of the flow process.
	Keywords: Flow steering
	Discovered in Release: 4.7-1.0.0.1
1892663/1800633	Description: mlnx_tune script does not support python3 interpreter.
	Workaround: Run mlnx_tune with python2 interpreter only.
	Keywords: mlnx_tune, python3, python2
	Discovered in Release: 4.7-1.0.0.1

Internal Ref. Number	Issue
1504785	Description: A lost interrupt issue in pass-through virtual machines may prevent the driver from loading, followed by printing managed pages errors to the dmesg.

Internal Ref. Number	Issue
	<p>Workaround: Restart the driver.</p> <p>Keywords: VM, virtual machine</p> <p>Discovered in Release: 4.6-1.0.1.1</p>
1764415	<p>Description: Unbinding PFs on LAG devices results in a "Failed to modify QP to RESET" error message.</p> <p>Workaround: N/A</p> <p>Keywords: RoCE LAG, unbind, PF, RDMA</p> <p>Discovered in Release: 4.6-1.0.1.1</p>
1806565	<p>Description: RoCE default GIDs v1 and v2 are derived from the MAC address of the corresponding netdevice's PCI function, and they resemble the IPv6 address. However, in systems where the IPv6 link local address generated does not depend on the MAC address, RoCEv2 default GID should not be used.</p> <p>Workaround: Use RoCEv2 default GID.</p> <p>Keywords: RoCE</p> <p>Discovered in Release: 4.6-1.0.1.1</p>
-	<p>Description: Aging is not functional on bond device in RHEL 7.6.</p> <p>Workaround: N/A</p> <p>Keywords: VF LAG, ASAP²</p> <p>Discovered in Release: 4.6-1.0.1.1</p>
1747774	<p>Description: In VF LAG mode, outgoing traffic in load balanced mode is according to the origin ring, thus, half of the rings will be coupled with port 1 and half with port 2. All the traffic on the same ring will be sent from the same port.</p> <p>Workaround: N/A</p> <p>Keywords: VF LAG, ASAP²</p> <p>Discovered in Release: 4.6-1.0.1.1</p>

Internal Ref. Number	Issue
1753629	<p>Description: A bonding bug found in Kernels 4.12 and 4.13 may cause a slave to become permanently stuck in BOND_LINK_FAIL state. As a result, the following message may appear in dmesg: bond: link status down for interface eth1, disabling it in 100 ms</p>
	<p>Workaround: N/A</p>
	<p>Keywords: Bonding, slave</p>
	<p>Discovered in Release: 4.6-1.0.1.1</p>
1712068	<p>Description: Uninstalling MLNX_OFED automatically results in the uninstallation of several libraries that are included in the MLNX_OFED package, such as InfiniBand-related libraries.</p>
	<p>Workaround: If these libraries are required, reinstall them using the local package manager (yum/dnf).</p>
	<p>Keywords: MLNX_OFED libraries</p>
	<p>Discovered in Release: 4.6-1.0.1.1</p>
-	<p>Description: Due to changes in libraries, MFT v4.11.0 and below are not forward compatible with MLNX_OFED v4.6-1.0.0.0 and above. Therefore, with MLNX_OFED v4.6-1.0.0.0 and above, it is recommended to use MFT v4.12.0 and above.</p>
	<p>Workaround: N/A</p>
	<p>Keywords: MFT compatible</p>
	<p>Discovered in Release: 4.6-1.0.1.1</p>
1730840	<p>Description: On ConnectX-4 HCAs, GID index for RoCE v2 is inconsistent when toggling between enabled and disabled interface modes.</p>
	<p>Workaround: N/A</p>
	<p>Keywords: RoCE v2, GID</p>
	<p>Discovered in Release: 4.6-1.0.1.1</p>
1717428	<p>Description: On kernels 4.10-4.14, MTUs larger than 1500 cannot be set for a GRE interface with any driver (IPv4 or IPv6).</p>
	<p>Workaround: Upgrade your kernel to any version higher than v4.14.</p>

Internal Ref. Number	Issue
	<p>Keywords: Fedora 27, gretap, ip_gre, ip_tunnel, ip6_gre, ip6_tunnel</p> <p>Discovered in Release: 4.6-1.0.1.1</p>
1748343	<p>Description: Driver reload takes several minutes when a large number of VFs exists.</p> <p>Workaround: N/A</p> <p>Keywords: VF, SR-IOV</p> <p>Discovered in Release: 4.6-1.0.1.1</p>
1733974	<p>Description: Running heavy traffic (such as 'ping flood') while bringing up and down other mlx5 interfaces may result in "INFO: rcu_preempt detected stalls on CPUs/tasks:" call traces.</p> <p>Workaround: N/A</p> <p>Keywords: mlx5</p> <p>Discovered in Release: 4.6-1.0.1.1</p>
-	<p>Description: On ConnectX-6 HCAs and above, an attempt to configure advertisement (any bitmap) will result in advertising the whole capabilities.</p> <p>Workaround: N/A</p> <p>Keywords: 200Gb/s, advertisement, Ethtool</p> <p>Discovered in Release: 4.6-1.0.1.1</p>

Internal Ref. Number	Issue
1699289	<p>Description: HW LRO feature is disabled OOB, which results in increased CPU utilization on the Receive side. On ConnectX-5 adapter cards and above, this causes a bandwidth drop for a few streams.</p> <p>Workaround: Make sure to enable HW LRO in the driver: ethtool -k <intf> lro ethtool --set-priv-flag <intf> hw_lro on</p> <p>Keywords: HW LRO, ConnectX-5 and above</p>

Internal Ref. Number	Issue
	Discovered in Release: 4.5-1.0.1.0
1403313	Description: Attempting to allocate an excessive number of VFs per PF in operating systems with kernel versions below v4.15 might fail due to a known issue in the Kernel.
	Workaround: Make sure to update the Kernel version to v4.15 or above.
	Keywords: VF, PF, IOMMU, Kernel, OS
	Discovered in Release: 4.5-1.0.1.0
-	<p>Description: NEO-Host is not supported on the following OSs:</p> <ul style="list-style-type: none"> • SLES12 SP3 • SLES12 SP4 • SLES15 • Fedora 28 • RHEL7.1 • RHEL7.4 ALT (Pegas1.0) • REL 7.5 • RHEL7.6 • XenServer 4.9
	Workaround: N/A
	Keywords: NEO-Host, operating systems
	Discovered in Release: 4.5-1.0.1.0
1521877	Description: On SLES 12 SP1 OSs, a kernel tracepoint issue may cause undefined behavior when inserting a kernel module with a wrong parameter.
	Workaround: N/A
	Keywords: mlx5 driver, SLES 12 SP1
	Discovered in Release: 4.5-1.0.1.0

User Manual

- [Introduction](#)
- [Installation](#)
- [Features Overview and Configuration](#)
- [Programming](#)
- [InfiniBand Fabric Utilities](#)
- [Troubleshooting](#)
- [Common Abbreviations and Related Documents](#)

Introduction

This manual is intended for system administrators responsible for the installation, configuration, management and maintenance of the software and hardware of VPI (InfiniBand, Ethernet) adapter cards. It is also intended for application developers.

NVIDIA OFED is a single Virtual Protocol Interconnect (VPI) software stack which operates across all NVIDIA network adapter solutions supporting the following uplinks to servers:

Uplink/Adapter Card	Driver Name	Uplink Speed
BlueField-2	mlx5	<ul style="list-style-type: none">• InfiniBand: SDR, FDR, EDR, HDR• Ethernet: 1GbE, 10GbE, 25GbE, 40GbE, 50GbE², 100GbE²
BlueField		<ul style="list-style-type: none">• InfiniBand: SDR, QDR, FDR, FDR10, EDR• Ethernet: 1GbE, 10GbE, 25GbE, 40GbE, 50GbE, 100GbE

Uplink/Adapter Card	Driver Name	Uplink Speed
ConnectX-7		<ul style="list-style-type: none"> • InfiniBand: EDR, HDR100, HDR, NDR200, NDR • Ethernet: 1GbE, 10GbE, 25GbE, 40GbE, 50GbE², 100GbE², 200GbE³
ConnectX-6 Lx		<ul style="list-style-type: none"> • Ethernet: 1GbE, 10GbE, 25GbE, 40GbE, 50GbE²
ConnectX-6 Dx		<ul style="list-style-type: none"> • Ethernet: 10GbE, 25GbE, 40GbE, 50GbE², 100GbE², 200GbE²
ConnectX-6		<ul style="list-style-type: none"> • InfiniBand: SDR, FDR, EDR, HDR • Ethernet: 10GbE, 25GbE, 40GbE, 50GbE², 100GbE², 200GbE²
ConnectX-5/ConnectX-5 Ex		<ul style="list-style-type: none"> • InfiniBand: SDR, QDR, FDR, FDR10, EDR • Ethernet: 1GbE, 10GbE, 25GbE, 40GbE, 50GbE, 100GbE
ConnectX-4 Lx		<ul style="list-style-type: none"> • Ethernet: 1GbE, 10GbE, 25GbE, 40GbE, 50GbE
ConnectX-4		<ul style="list-style-type: none"> • InfiniBand: SDR, QDR, FDR, FDR10, EDR • Ethernet: 1GbE, 10GbE, 25GbE, 40GbE, 50GbE, 56GbE¹, 100GbE

1. 56GbE is an NVIDIA proprietary link speed and can be achieved while connecting an NVIDIA adapter card to NVIDIA SX10XX switch series or when connecting an NVIDIA adapter card to another NVIDIA adapter card.
2. Speed that supports both NRZ and PAM4 modes in Force mode and Auto-Negotiation mode.
3. Speed that supports PAM4 mode only.


All NVIDIA network adapter cards are compatible with OpenFabrics-based RDMA protocols and software and are supported by major operating system distributions.

NVIDIA OFED is certified with the following products:

- NVIDIA Messaging Accelerator (VMA™) software: Socket acceleration library that performs OS bypass for standard socket-based applications. Please note, VMA support is provided separately from NVIDIA OFED support. For further information, please refer to the VMA documentation (docs.nvidia.com/networking/category/vma).
- NVIDIA Unified Fabric Manager (UFM®) software: Powerful platform for managing demanding scale-out computing fabric environments, built on top of the OpenSM industry standard routing engine.
- Fabric Collective Accelerator (FCA)—FCA is a NVIDIA MPI-integrated software package that utilizes CORE-Direct technology for implementing the MPI collectives communications.

Stack Architecture

The figure below shows a diagram of the NVIDIA OFED stack, and how upper layer protocols (ULPs) interface with the hardware and with the kernel and userspace. The application level also shows the versatility of markets that NVIDIA OFED applies to.

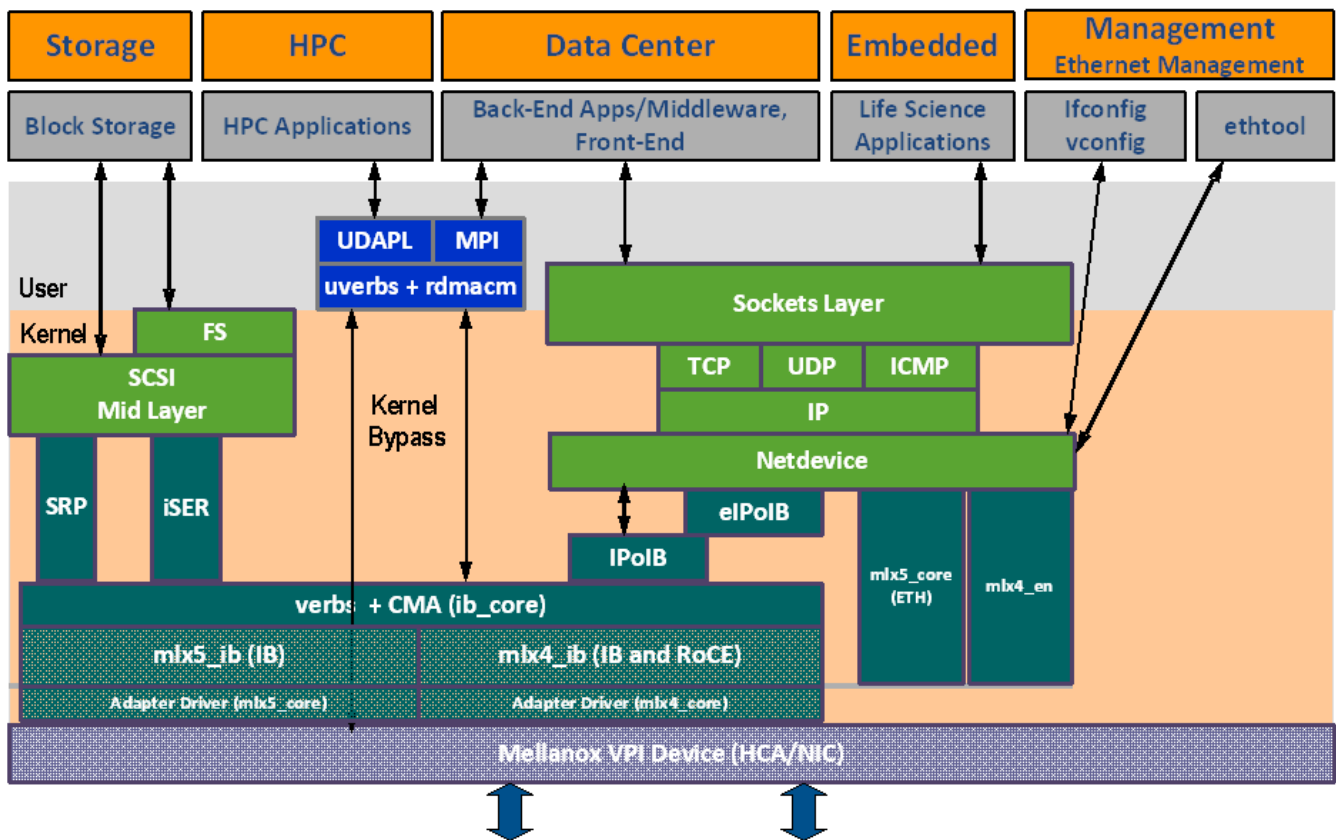

The following subsections briefly describe the various components of the NVIDIA OFED stack.

mlx4 VPI Driver

⚠ Warning

This driver is no longer supported in MLNX_OFED. To work with ConnectX-3® and ConnectX-3 Pro NICs, please refer to MLNX_OFED LTS version available on the web.

mlx5 Driver

mlx5 is the low-level driver implementation for the Connect-IB® and ConnectX-4 and above adapters designed by NVIDIA. ConnectX-4 and above adapter cards operate as a VPI adapter (Infiniband and Ethernet). The mlx5 driver is comprised of the following kernel modules:

Warning

Please note that Connect-IB card is no longer supported in MLNX_OFED. To work with this card, please refer to MLNX_OFED LTS version available on the web.

mlx5_core

Acts as a library of common functions (e.g. initializing the device after reset) required by ConnectX-4 and above adapter cards. mlx5_core driver also implements the Ethernet interfaces for ConnectX-4 and above. mlx5 drivers do not require the mlx5_en module as the Ethernet functionalities are built-in in the mlx5_core module.

mlx5_ib

Handles InfiniBand-specific functions and plugs into the InfiniBand mid layer.

libmlx5

libmlx5 is the provider library that implements hardware specific user-space functionality. If there is no compatibility between the firmware and the driver, the driver will not load and a message will be printed in the dmesg.

The following are the libmlx5 **Legacy** and **RDMA-Core** environment variables:

- MLX5_FREEZE_ON_ERROR_CQE
 - Causes the process to hang in a loop of completion with error, which is not flushed with error or retry exceeded occurs/
 - Otherwise disabled
- MLX5_POST_SEND_PREFER_BF
 - Configures every work request that can use blue flame will use blue flame
- Otherwise, blue flame depends on the size of the message and inline indication in the packet

- MLX5_SHUT_UP_BF
 - Disables blue flame feature
 - Otherwise, do not disable
- MLX5_SINGLE_THREADED
 - All spinlocks are disabled
 - Otherwise, spinlocks enabled
 - Used by applications that are single threaded and would like to save the overhead of taking spinlocks.
- MLX5_CQE_SIZE
 - 64—completion queue entry size is 64 bytes (default)
 - 128—completion queue entry size is 128 bytes
- MLX5_SCATTER_TO_CQE
 - Small buffers are scattered to the completion queue entry and manipulated by the driver. Valid for RC transport.
 - Default is 1, otherwise disabled

The following are libmlx5 **Legacy** only environment variables:

- MLX5_ENABLE_CQE_COMPRESSION
 - Saves PCIe bandwidth by compressing a few CQEs into a smaller amount of bytes on PCIe. Setting this variable enables CQE compression.
 - Default value 0 (disabled)
- MLX5_RELAXED_PACKET_ORDERING_ON
See “[Out-of-Order \(OOO\) Data Placement](#)” section.

Mid-layer Core

Core services include management interface (MAD), connection manager (CM) interface, and Subnet Administrator (SA) interface. The stack includes components for both user-mode and kernel applications. The core services run in the kernel and expose an interface to user-mode for verbs, CM and management.

Upper Layer Protocols (ULPs)

IP over IB (IPoIB)

The IP over IB (IPoIB) driver is a network interface implementation over InfiniBand. IPoIB encapsulates IP datagrams over an InfiniBand connected or datagram transport service. IPoIB pre-appends the IP datagrams with an encapsulation header and sends the outcome over the InfiniBand transport service. The transport service is Unreliable Datagram (UD) by default, but it may also be configured to be Reliable Connected (RC), in case RC is supported. The interface supports unicast, multicast and broadcast. For details, see [“IP over InfiniBand \(IPoIB\)”](#) section.

iSCSI Extensions for RDMA (iSER)

iSCSI Extensions for RDMA (iSER) extends the iSCSI protocol to RDMA. It permits data to be transferred directly into and out of SCSI buffers without intermediate data copies. For further information, please refer to [“iSCSI Extensions for RDMA \(iSER\)”](#) section.

SCSI RDMA Protocol (SRP)

SCSI RDMA Protocol (SRP) is designed to take full advantage of the protocol offload and RDMA features provided by the InfiniBand architecture. SRP allows a large body of SCSI software to be readily used on InfiniBand architecture. The SRP driver—known as the SRP Initiator—differs from traditional low-level SCSI drivers in Linux. The SRP Initiator does not control a local HBA; instead, it controls a connection to an I/O controller—known as the SRP Target—to provide access to remote storage devices across an InfiniBand fabric. The SRP Target resides in an I/O unit and provides storage services. See [“SRP—SCSI RDMA Protocol”](#) section.

User Direct Access Programming Library (uDAPL)

User Direct Access Programming Library (uDAPL) is a standard API that promotes data center application data messaging performance, scalability, and reliability over RDMA interconnects InfiniBand and RoCE. The uDAPL interface is defined by the DAT collaborative. This release of the uDAPL reference implementation package for both DAT 1.2 and 2.0 specification is timed to coincide with OFED release of the Open Fabrics (openfabrics.org) software stack.

MPI

Message Passing Interface (MPI) is a library specification that enables the development of parallel software libraries to utilize parallel computers, clusters, and heterogeneous networks. NVIDIA OFED includes the following MPI implementation over InfiniBand:

- Open MPI – an open source MPI-2 implementation by the Open MPI Project

NVIDIA OFED also includes MPI benchmark tests such as OSU BW/LAT, Intel MPI BeBenchmark and Presta.

InfiniBand Subnet Manager

All InfiniBand-compliant ULPs require a proper operation of a Subnet Manager (SM) running on the InfiniBand fabric, at all times. An SM can run on any node or on an IB switch. OpenSM is an InfiniBand-compliant Subnet Manager, and it is installed as part of NVIDIA OFED¹.

1. OpenSM is disabled by default. See "[OpenSM](#)" section for details on enabling it.

Diagnostic Utilities

NVIDIA OFED includes the following two diagnostic packages for use by network and data center managers:

- ibutils—NVIDIA diagnostic utilities
- infiniband-diags—OpenFabrics Alliance InfiniBand diagnostic tools

NVIDIA Firmware Tools (MFT)

The NVIDIA Firmware Tools package is a set of firmware management tools for a single InfiniBand node. MFT can be used for:

- Generating a standard or customized NVIDIA firmware image
- Burning a firmware image to a single InfiniBand node

MFT includes a set of tools used for performing firmware update and configuration, as well as debug and diagnostics, and provides MST service. For the full list of available tools within MFT, please refer to MFT documentation (docs.nvidia.com/networking/category/mft).

Package Contents

ISO Image

NVIDIA OFED for Linux (MLNX_OFED_LINUX) is provided as ISO images or as a tarball, one per supported Linux distribution and CPU architecture, that includes *source code* and *binary* RPMs, firmware, utilities, and documentation. The ISO image contains an installation script (called `mlnxofedinstall`) that performs the necessary steps to accomplish the following:

- Discover the currently installed kernel
- Uninstall any InfiniBand stacks that are part of the standard operating system distribution or another vendor's commercial stack
- Install the MLNX_OFED_LINUX binary RPMs (if they are available for the current kernel)
- Identify the currently installed InfiniBand HCAs and perform the required firmware updates

Software Components

MLNX_OFED_LINUX contains the following software components:

- NVIDIA Host Channel Adapter Drivers
 - `mlx5`
 - `mlx5_ib`
 - `mlx5_core` (includes Ethernet)
- Mid-layer core
 - Verbs, MADs, SA, CM, CMA, uVerbs, uMADs
- Upper Layer Protocols (ULPs)

- IPoIB, SRP Initiator and SRP
- MPI
 - Open MPI stack supporting the InfiniBand, RoCE and Ethernet interfaces
 - MPI benchmark tests (OSU BW/LAT, Intel MPI Benchmark, Presta)
- OpenSM: InfiniBand Subnet Manager
- Utilities
 - Diagnostic tools
 - Performance tests
 - Sysinfo (see [Sysinfo User Manual](#))
- Firmware tools (MFT)
- Source code for all the OFED software modules (for use under the conditions mentioned in the modules' LICENSE files)
- Documentation

Firmware

The ISO image includes the following firmware item:

- mlnx-fw-updater RPM/DEB package, which contains firmware binaries for supported devices (using mlxfwmanager tool).

Directory Structure

The ISO image of MLNX_OFED_LINUX contains the following files and directories:

- mlnxfedinstall—the MLNX_OFED_LINUX installation script.

- `ofed_uninstall.sh`—This is the `MLNX_OFED_LINUX` un-installation script.
- `<RPMS folders>`—Directory of binary RPMs for a specific CPU architecture.
- `src/`—Directory of the OFED source tarball.

Warning

`MLNX_OFED` includes the OFED source RPM packages used as a build platform for kernel code but does not include the sources of NVIDIA proprietary packages.

- `mlnx_add_kernel_support.sh`—Script required to rebuild `MLNX_OFED_LINUX` for customized kernel version on supported Linux Distribution
- RPM based—A script required to rebuild `MLNX_OFED_LINUX` for customized kernel version on supported RPM-based Linux Distribution
- `docs/`—Directory of NVIDIA OFED related documentation

Module Parameters

mlx5_core Module Parameters

The `mlx5_core` module supports a single parameter used to select the profile which defines the number of resources supported.

<i>prof_sel</i>	<p>The parameter name for selecting the profile. The supported values for profiles are:</p> <ul style="list-style-type: none"> • 0—for medium resources, medium performance • 1—for low resources
-----------------	---

	<ul style="list-style-type: none"> • 2—for high performance (int) (default)
guids	charp
node_guid	guids configuration. This module parameter will be obsolete!
debug_mask	debug_mask: 1 = dump cmd data, 2 = dump cmd exec time, 3 = both. Default=0 (uint)
probe_vf	probe VFs or not, 0 = not probe, 1 = probe. Default = 1 (bool)
num_of_groups	Controls the number of large groups in the FDB flow table. Default=4; Range=1-1024

ib_core Parameters

send_queue_size	Size of send queue in number of work requests (int)
recv_queue_size	Size of receive queue in number of work requests (int)
force_mr	Force usage of MRs for RDMA READ/WRITE operations (bool)
roce_v1_noncompat_gid	Default GID auto configuration (Default: yes) (bool)

ib_ipoib Parameters

max_nonsrq_conn_qp	Max number of connected-mode QPs per interface (applied only if shared receive queue is not available) (int)
mcast_debug_level	Enable multicast debug tracing if > 0 (int)
send_queue_size	Number of descriptors in send queue (int)
recv_queue_size	Number of descriptors in receive queue (int)
debug_level	Enable debug tracing if > 0 (int)
ipoib_Enhanced	Enable IPoIB enhanced for capable devices (default = 1) (0-1) (int)

Device Capabilities

Normally, an application needs to query the device capabilities before attempting to create a resource. It is essential for the application to be able to operate over different devices with different capabilities.

Specifically, when creating a QP, the user needs to specify the maximum number of outstanding work requests that the QP supports. This value should not exceed the queried capabilities. However, even when you specify a number that does not exceed the queried capability, the verbs can still fail since some other factors such as the number of scatter/gather entries requested, or the size of the inline data required, affect the maximum possible work requests. Hence an application should try to decrease this size (halving is a good new value) and retry until it succeeds.

Installation

This chapter describes how to install and test the NVIDIA OFED for Linux package on a single host machine with NVIDIA InfiniBand and/or Ethernet adapter hardware installed.

The chapter contains the following sections:

- [Hardware and Software Requirements](#)
- [Downloading the Drivers](#)
- [Installing MLNX_OFED](#)
- [Uninstall](#)
- [Updating Firmware After Installation](#)
- [UEFI Secure Boot](#)
- [Performance Tuning](#)

Features Overview and Configuration

Warning

It is recommended to enable the “above 4G decoding” BIOS setting for features that require large amount of PCIe resources.

Such features are: SR-IOV with numerous VFs, PCIe Emulated Switch, and Large BAR Requests.

The chapter contains the following sections:

- [Ethernet Network](#)
- [InfiniBand Network](#)
- [Storage Protocols](#)
- [Virtualization](#)
- [Resiliency](#)
- [Docker Containers](#)
- [HPC-X](#)
- [Fast Driver Unload](#)

- [OVS Offload Using ASAP² Direct](#)

Programming

Warning

This chapter is aimed for application developers and expert users that wish to develop applications over MLNX_OFED.

Raw Ethernet Programming

Raw Ethernet programming enables writing an application that bypasses the kernel stack. To achieve this, packet headers and offload options need to be provided by the application.

For a basic example on how to use Raw Ethernet programming, refer to the [Raw Ethernet Programming: Basic Introduction—Code Example](#) Community post.

Packet Pacing

Packet pacing is a raw Ethernet sender feature that enables controlling the rate of each QP, per send queue.

For a basic example on how to use packet pacing per flow over libibverbs, refer to [Raw Ethernet Programming: Packet Pacing—Code Example](#) Community post.

TCP Segmentation Offload (TSO)

TCP Segmentation Offload (TSO) enables the adapter cards to accept a large amount of data with a size greater than the MTU size. The TSO engine splits the data into separate packets and inserts the user-specified L2/L3/L4 headers automatically per packet. With the usage of TSO, CPU is offloaded from dealing with a large throughput of data.

To be able to program that on the sender side, refer to the [Raw Ethernet Programming: TSO—Code Example](#) Community post.

ToS Based Steering

ToS/DSCP is an 8-bit field in the IP packet that enables different service levels to be assigned to network traffic. This is achieved by marking each packet in the network with a DSCP code and appropriating the corresponding level of service to it.

To be able to steer packets according to the ToS field on the receiver side, refer to the [Raw Ethernet Programming: ToS—Code Example](#) Community post.

Flow ID Based Steering

Flow ID based steering enables developing a code that will steer packets using flow ID when developing Raw Ethernet over verbs. For more information on flow ID based steering, refer to the [Raw Ethernet Programming: Flow ID Steering—Code Example](#) Community post.

VXLAN Based Steering

VXLAN based steering enables developing a code that will steer packets using the VXLAN tunnel ID when developing Raw Ethernet over verbs. For more information on VXLAN based steering, refer to the [Raw Ethernet Programming: VXLAN Steering—Code Example](#) Community post.

Device Memory Programming

Warning

This feature is supported on ConnectX-5/ConnectX-5 Ex adapter cards and above only.

Device Memory is an API that allows using on-chip memory located on the device as a data buffer for send/receive and RDMA operations. The device memory can be mapped and accessed directly by user and kernel applications, and can be allocated in various sizes, registered as memory regions with local and remote access keys for performing the send/receive and RDMA operations.

Using the device memory to store packets for transmission can significantly reduce transmission latency compared to the host memory.

Device Memory Programming Model

The new API introduces a similar procedure to the host memory for sending packets from the buffer:

- `ibv_alloc_dm()/ibv_free_dm()` - to allocate/free device memory
- `ibv_reg_dm_mr` - to register the allocated device memory buffer as a memory region and get a memory key for local/remote access by the device
- `ibv_memcpy_to_dm` - to copy data to a device memory buffer
- `ibv_memcpy_from_dm` - to copy data from a device memory buffer
- `ibv_post_send/ibv_post_receive` - to request the device to perform a send/receive operation using the memory key

For examples, see [Device Memory](#).

RDMA-CM QP Timeout Control

RDMA-CM QP Timeout Control feature enables users to control the QP timeout for QPs created with RDMA-CM.

A new option in 'rdma_set_option' function has been added to enable overriding calculated QP timeout, in order to provide QP attributes for QP modification. To achieve that, `rdma_set_option()` should be called with the new flag `RDMA_OPTION_ID_ACK_TIMEOUT`.

Example:

```
rdma_set_option(cma_id, RDMA_OPTION_ID, RDMA_OPTION_ID_ACK_TIMEOUT,  
&timeout, sizeof(timeout));
```

RDMA-CM Application Managed QP

Applications which do not create a QP through `rdma_create_qp()` may want to postpone the ESTABLISHED event on the passive side, to let the active side complete an application-specific connection establishment phase. For example, modifying the init state of the QP created by the application to RTR state, or make some preparations for receiving messages from the passive side. The feature returns a new event on the active side: `CONNECT_RESPONSE`, instead of `ESTABLISHED`, if `id->qp==NULL`. This gives the application a chance to perform the extra connection setup. Afterwards, the new `rdma_establish()` API should be called to complete the connection and generate an ESTABLISHED event on the passive side.

In addition, this feature exposes the `'rdma_init_qp_attr'` function in `librdmacm` API, which enables applications to get the parameters for creating Address Handler (AH) or control QP attributes after its creation.

InfiniBand Fabric Utilities

This section first describes common configuration, interface, and addressing for all the tools in the package.

Common Configuration, Interface and Addressing

Topology File (Optional)

An InfiniBand fabric is composed of switches and channel adapter (HCA/TCA) devices. To identify devices in a fabric (or even in one switch system), each device is given a GUID (a MAC equivalent). Since a GUID is a non-user-friendly string of characters, it is better to alias it to a meaningful, user-given name. For this objective, the IB Diagnostic Tools can be provided with a “topology file”, which is an optional configuration file specifying the IB

fabric topology in user-given names.

For diagnostic tools to fully support the topology file, the user may need to provide the local system name (if the local hostname is not used in the topology file).

To specify a topology file to a diagnostic tool use one of the following two options:

1. On the command line, specify the file name using the option '`-t <topology file name>`'
2. Define the environment variable `IBDIAG_TOPO_FILE`

To specify the local system name to an diagnostic tool use one of the following two options:

1. On the command line, specify the system name using the option '`-s <local system name>`'
2. Define the environment variable `IBDIAG_SYS_NAME`

InfiniBand Interface Definition

The diagnostic tools installed on a machine connect to the IB fabric by means of an HCA port through which they send MADs. To specify this port to an IB diagnostic tool use one of the following options:

1. On the command line, specify the port number using the option '`-p <local port number>`' (see below)
2. Define the environment variable `IBDIAG_PORT_NUM`

In case more than one HCA device is installed on the local machine, it is necessary to specify the device's index to the tool as well. For this use one of the following options:

1. On the command line, specify the index of the local device using the following option: '`-i <index of local device>`'
2. Define the environment variable `IBDIAG_DEV_IDX`

Addressing

Warning

This section applies to the `ibdiagpath` tool only. A tool command may require defining the destination device or port to which it applies.

The following addressing modes can be used to define the IB ports:

- Using a Directed Route to the destination: (Tool option `'-d'`)
This option defines a directed route of output port numbers from the local port to the destination.
- Using port LIDs: (Tool option `'-l'`):
In this mode, the source and destination ports are defined by means of their LIDs. If the fabric is configured to allow multiple LIDs per port, then using any of them is valid for defining a port.
- Using port names defined in the topology file: (Tool option `'-n'`)
This option refers to the source and destination ports by the names defined in the topology file. (Therefore, this option is relevant only if a topology file is specified to the tool.) In this mode, the tool uses the names to extract the port LIDs from the matched topology, then the tool operates as in the `'-l'` option.

Diagnostic Utilities

The diagnostic utilities described in this chapter provide means for debugging the connectivity and status of InfiniBand (IB) devices in a fabric.

Diagnostic Utilities

Utility	Description
<code>dump_fts</code>	Dumps tables for every switch found in an <code>ibnetdiscover</code> scan of the subnet. The dump file format is compatible with loading into OpenSM using the <code>-R file -U /path/to/dump-file</code> syntax. For further information, please refer to the tool's man page.

Utility	Description
ibaddr	Can be used to show the LID and GID addresses of the specified port or the local port by default. This utility can be used as simple address resolver. For further information, please refer to the tool's man page.
ibcheedit	Allows users to edit an ibnetdiscover cache created through the --cache option in ibnetdiscover(8). For further information, please refer to the tool's man page.
ibccconfig	Supports the configuration of congestion control settings on switches and HCAs. For further information, please refer to the tool's man page.
ibccquery	Supports the querying of settings and other information related to congestion control. For further information, please refer to the tool's man page.
ibcongest	Provides static congestion analysis. It calculates routing for a given topology (topo-mode) or uses extracted lst/fdb files (lst-mode). Additionally, it analyzes congestion for a traffic schedule provided in a "schedule-file" or uses an automatically generated schedule of all-to-all-shift. To display a help message which details the tool's options, please run <code>"/opt/ibutils2/bin/ibcongest -h"</code> . For further information, please refer to the tool's man page.
ibdev2netdev	Enables association between IB devices and ports and the associated net device. Additionally it reports the state of the net device link. For further information, please refer to the tool's man page.
ibdiagnet (of ibutils2)	Scans the fabric using directed route packets and extracts all the available information regarding its connectivity and devices. An ibdiagnet run performs the following stages: <ul style="list-style-type: none"> • Fabric discovery • Duplicated GUIDs detection • Links in INIT state and unresponsive links detection • Counters fetch • Error counters check • Routing checks • Link width and speed checks

Utility	Description
	<ul style="list-style-type: none"> • Alias GUIDs check • Subnet Manager check • Partition keys check • Nodes information <p>Note: This version of ibdiagnet is included in the ibutils2 package, and it is run by default after installing NVIDIA OFED. To use this ibdiagnet version, run: ibdiagnet. For further information, either:</p> <ol style="list-style-type: none"> 1. Run ibdiagnet -H <p>Or</p> <ol style="list-style-type: none"> 2. Refer to https://docs.mellanox.com/display/ibdiagnetUserManualv10
ibdi agp ath	<p>Traces a path between two end-points and provides information regarding the nodes and ports traversed along the path. It utilizes device specific health queries for the different devices along the path.</p> <p>The way ibdiagpath operates depends on the addressing mode used in the command line. If directed route addressing is used (--dr_path flag), the local node is the source node and the route to the destination port is known apriori (for example: ibdiagpath --dr_path 0,1). On the other hand, if LID-route addressing is employed, --src_lid and --dest_lid, then the source and destination ports of a route are specified by their LIDs. In this case, the actual path from the local port to the source port, and from the source port to the destination port, is defined by means of Subnet Management Linear Forwarding Table queries of the switch nodes along that path. Therefore, the path cannot be predicted as it may change.</p> <p>Example: ibdiagpath --src_lid 1 --dest_lid 28</p> <p>For further information, please refer to the tool's -help flag.</p>
ibd um p	<p>Dump InfiniBand traffic that flows to and from NVIDIA's ConnectX® family adapters InfiniBand ports.</p> <p>Note the following:</p> <ul style="list-style-type: none"> • ibdump is not supported for Virtual functions (SR-IOV) • Infiniband traffic sniffing is supported on all HCAs <p>The dump file can be loaded by the Wireshark tool for graphical traffic analysis. The following describes a workflow for local HCA (adapter) sniffing:</p> <ol style="list-style-type: none"> 1. Run ibdump with the desired options 2. Run the application that you wish its traffic to be analyzed 3. Stop ibdump (CTRL-C) or wait for the data buffer to fill (in --mem-mode)

Utility	Description
	<p>4. Open Wireshark and load the generated file</p> <p>To download Wireshark for a Linux or Windows environment go to www.wireshark.org.</p> <p>Notes:</p> <ul style="list-style-type: none"> • Although ibdump is a Linux application, the generated .pcap file may be analyzed on either operating system. • If one of the HCA's ports is configured as InfiniBand, ibdump requires IPoIB DMFS to be enabled. For further information, please refer to Flow Steering Configuration section. <p>For further information, please refer to the tool's man page.</p>
iblinkinfo	<p>Reports link info for each port in an InfiniBand fabric, node by node. Optionally, iblinkinfo can do partial scans and limit its output to parts of a fabric.</p> <p>For further information, please refer to the tool's man page.</p>
ibnetdiscover	<p>Performs InfiniBand subnet discovery and outputs a human readable topology file. GUIDs, node types, and port numbers are displayed as well as port LIDs and node descriptions. All nodes (and links) are displayed (full topology).</p> <p>This utility can also be used to list the current connected nodes. The output is printed to the standard output unless a topology file is specified.</p> <p>For further information, please refer to the tool's man page.</p>
ibnetsplit	<p>Automatically groups hosts and creates scripts that can be run in order to split the network into sub-networks containing one group of hosts.</p> <p>For further information, please refer to the tool's man page.</p>
ibnodes	<p>Uses the current InfiniBand subnet topology or an already saved topology file and extracts the InfiniBand nodes (CAs and switches).</p> <p>For further information, please refer to the tool's man page.</p>
ibping	<p>Uses vendor mads to validate connectivity between InfiniBand nodes. On exit, (IP) ping like output is show. ibping is run as client/server. The default is to run as client. Note also that a default ping server is implemented within the kernel.</p> <p>For further information, please refer to the tool's man page.</p>
ibportstate	<p>Enables querying the logical (link) and physical port states of an InfiniBand port. It also allows adjusting the link speed that is enabled on any InfiniBand port.</p> <p>If the queried port is a switch port, then ibportstate can be used to:</p>

Utility	Description
	<ul style="list-style-type: none"> • disable, enable or reset the port • validate the port's link width and speed against the peer port <p>In case of multiple channel adapters (CAs) or multiple ports without a CA/ port being specified, a port is chosen by the utility according to the following criteria:</p> <ul style="list-style-type: none"> • The first ACTIVE port that is found. • If not found, the first port that is UP (physical link state is LinkUp). <p>For further information, please refer to the tool's man page.</p>
ibqueryerrors	<p>The default behavior is to report the port error counters which exceed a threshold for each port in the fabric. The default threshold is zero (0). Error fields can also be suppressed entirely.</p> <p>In addition to reporting errors on every port, <code>ibqueryerrors</code> can report the port transmit and receive data as well as report full link information to the remote port if available.</p> <p>For further information, please refer to the tool's man page.</p>
ibroute	<p>Uses SMPs to display the forwarding tables—unicast (LinearForwarding- Table or LFT) or multicast (MulticastForwardingTable or MFT)—for the specified switch LID and the optional lid (mlid) range. The default range is all valid entries in the range 1 to FDBTop.</p> <p>For further information, please refer to the tool's man page.</p>
ibstat	<p><code>ibstat</code> is a binary which displays basic information obtained from the local IB driver. Output includes LID, SMLID, port state, link width active, and port physical state.</p> <p>For further information, please refer to the tool's man page.</p>
ibstats	<p>Displays basic information obtained from the local InfiniBand driver. Output includes LID, SMLID, port state, port physical state, port width and port rate. For further information, please refer to the tool's man page.</p>
ibswitches	<p>Traces the InfiniBand subnet topology or uses an already saved topology file to extract the InfiniBand switches.</p> <p>For further information, please refer to the tool's man page.</p>
ibsysstat	<p>Uses vendor mads to validate connectivity between InfiniBand nodes and obtain other information about the InfiniBand node. <code>ibsysstat</code> is run as client/ server. The default is to run as client.</p>

Utility	Description
	For further information, please refer to the tool's man page.
ibtopdiff	<p>Compares a topology file and a discovered listing of <code>subnet.lst/ibdiagnet.lst</code> and reports mismatches.</p> <p>Two different algorithms provided:</p> <ul style="list-style-type: none"> • Using the <code>-e</code> option is more suitable for MANY mismatches it applies less heuristics and provide details about the match • Providing the <code>-s</code>, <code>-p</code> and <code>-g</code> starts a detailed heuristics that should be used when only small number of changes are expected <p>For further information, please refer to the tool's man page.</p>
ibtracert	<p>Uses SMPs to trace the path from a source GID/LID to a destination GID/ LID. Each hop along the path is displayed until the destination is reached or a hop does not respond. By using the <code>-m</code> option, multicast path tracing can be performed between source and destination nodes.</p> <p>For further information, please refer to the tool's man page.</p>
ibv_asyncwatch	<p>Display asynchronous events forwarded to userspace for an InfiniBand device.</p> <p>For further information, please refer to the tool's man page.</p>
ibv_devices	<p>Lists InfiniBand devices available for use from userspace, including node GUIDs.</p> <p>For further information, please refer to the tool's man page.</p>
ibv_devinfo	<p>Queries InfiniBand devices and prints about them information that is available for use from userspace.</p> <p>For further information, please refer to the tool's man page.</p>
mstflint	<p>Queries and burns a binary firmware-image file on non-volatile (Flash) memories of NVIDIA InfiniBand and Ethernet network adapters. The tool requires root privileges for Flash access.</p> <p>To run <code>mstflint</code>, you must know the device location on the PCI bus.</p> <p>Note: If you purchased a standard NVIDIA network adapter card, please download the firmware image from nvidia.com/en-us/networking/ Support Support Firmware Download. If you purchased a non-standard card from a vendor other than NVIDIA, please contact your vendor.</p>

Utility	Description
	For further information, please refer to the tool's man page.
perquery	Queries InfiniBand ports' performance and error counters. Optionally, it displays aggregated counters for all ports of a node. It can also reset counters after reading them or simply reset them. For further information, please refer to the tool's man page.
saquery	Issues the selected SA query. Node records are queried by default. For further information, please refer to the tool's man page.
sminfo	Issues and dumps the output of an sminfo query in human readable format. The target SM is the one listed in the local port info or the SM specified by the optional SM LID or by the SM direct routed path. Note: Using sminfo for any purpose other than a simple query might result in a malfunction of the target SM. For further information, please refer to the tool's man page.
smquery	Sends SMP query for adaptive routing and private LFT features. For further information, please refer to the tool's man page.
smdump	A general purpose SMP utility which gets SM attributes from a specified SMA. The result is dumped in hex by default. For further information, please refer to the tool's man page.
smquery	Provides a basic subset of standard SMP queries to query Subnet management attributes such as node info, node description, switch info, and port info. For further information, please refer to the tool's man page.

Link Level Retransmission (LLR) in FDR Links

With the introduction of FDR 56 Gbps technology, NVIDIA enabled a proprietary technology called LLR (Link Level Retransmission) to improve the reliability of FDR links.

This proprietary LLR technology adds additional CRC checking to the data stream and retransmits portions of packets with CRC errors at the local link level. Customers should be aware of the following facts associated with LLR technology:

- Traditional methods of checking the link health can be masked because the LLR technology automatically fixes errors. The traditional IB symbol error counter will show no errors when LLR is active.
- Latency of the fabric can be impacted slightly due to LLR retransmissions. Traditional IB performance utilities can be used to monitor any latency impact.
- Bandwidth of links can be reduced if cable performance degrades and LLR retransmissions become too numerous. Traditional IB bandwidth performance utilities can be used to monitor any bandwidth impact.

Due to these factors, an LLR retransmission rate counter has been added to the `ibdiagnet` utility that can give end users an indication of the link health.

➤ *To monitor LLR retransmission rate:*

1. Run `ibdiagnet`, no special flags required.
2. If the LLR retransmission rate limit is exceeded it will print to the screen.
3. The default limit is set to 500 and requires further investigation if exceeded.
4. The LLR retransmission rate is reflected in the results file `/var/tmp/ibdiagnet2/ibdiagnet2.pm`.

The default value of 500 retransmissions/sec has been determined by NVIDIA based on the extensive simulations and testing. Links exhibiting a lower LLR retransmission rate should not raise special concern.

Performance Utilities

The performance utilities described in this chapter are intended to be used as a performance micro-benchmark.

Utility	Description
ib_atom	Calculates the BW of RDMA Atomic transactions between a pair of machines. One acts as a server and the other as a client. The client RDMA sends atomic operation to the server and calculate the BW by sampling the CPU each time it

Utility	Description
ic_bw	<p>receive a successful completion. The test supports features such as Bidirectional, in which they both RDMA atomic to each other at the same time, change of MTU size, tx size, number of iteration, message size and more. Using the "-a" flag provides results for all message sizes.</p> <p>For further information, please refer to the tool's man page.</p>
ib_atomic_latency	<p>Calculates the latency of RDMA Atomic transaction of message_size between a pair of machines. One acts as a server and the other as a client. The client sends RDMA atomic operation and sample the CPU clock when it receives a successful completion, in order to calculate latency.</p> <p>For further information, please refer to the tool's man page.</p>
ib_read_bw	<p>Calculates the BW of RDMA read between a pair of machines. One acts as a server and the other as a client. The client RDMA reads the server memory and calculate the BW by sampling the CPU each time it receive a successful completion. The test supports features such as Bidirectional, in which they both RDMA read from each other memory's at the same time, change of MTU size, tx size, number of iteration, message size and more.</p> <p>Read is available only in RC connection mode (as specified in IB spec). For further information, please refer to the tool's man page.</p>
ib_read_latency	<p>Calculates the latency of RDMA read operation of message_size between a pair of machines. One acts as a server and the other as a client. They perform a ping pong benchmark on which one side RDMA reads the memory of the other side only after the other side have read his memory. Each of the sides samples the CPU clock each time they read the other side memory , in order to calculate latency. Read is available only in RC connection mode (as specified in IB spec).</p> <p>For further information, please refer to the tool's man page.</p>
ib_send_bw	<p>Calculates the BW of SEND between a pair of machines. One acts as a server and the other as a client. The server receive packets from the client and they both calculate the throughput of the operation. The test supports features such as Bidirectional, on which they both send and receive at the same time, change of MTU size, tx size, number of iteration, message size and more. Using the "-a" provides results for all message sizes.</p> <p>For further information, please refer to the tool's man page.</p>
ib_send_latency	<p>Calculates the latency of sending a packet in message_size between a pair of machines. One acts as a server and the other as a client. They perform a ping pong benchmark on which you send packet only if you receive one. Each of the</p>

Utility	Description
	sides samples the CPU each time they receive a packet in order to calculate the latency. Using the "-a" provides results for all message sizes. For further information, please refer to the tool's man page.
ib_write_bw	Calculates the BW of RDMA write between a pair of machines. One acts as a server and the other as a client. The client RDMA writes to the server memory and calculates the BW by sampling the CPU each time it receives a successful completion. The test supports features such as Bidirectional, in which they both RDMA write to each other at the same time, change of MTU size, tx size, number of iteration, message size and more. Using the "-a" flag provides results for all message sizes. For further information, please refer to the tool's man page.
ib_write_lat	Calculates the latency of RDMA write operation of message_size between a pair of machines. One acts as a server and the other as a client. They perform a ping pong benchmark on which one side RDMA writes to the other side memory only after the other side wrote on his memory. Each of the sides samples the CPU clock each time they write to the other side memory, in order to calculate latency. For further information, please refer to the tool's man page.
raw_ethernet_bw	Calculates the BW of SEND between a pair of machines. One acts as a server and the other as a client. The server receive packets from the client and they both calculate the throughput of the operation. The test supports features such as Bidirectional, on which they both send and receive at the same time, change of MTU size, tx size, number of iteration, message size and more. Using the "-a" provides results for all message sizes. For further information, please refer to the tool's man page.
raw_ethernet_lat	Calculates the latency of sending a packet in message_size between a pair of machines. One acts as a server and the other as a client. They perform a ping pong benchmark on which you send packet only if you receive one. Each of the sides samples the CPU each time they receive a packet in order to calculate the latency. Using the "-a" provides results for all message sizes. For further information, please refer to the tool's man page.

Troubleshooting

You may be able to easily resolve the issues described in this section. If a problem persists and you are unable to resolve it yourself, please contact your NVIDIA

representative or NVIDIA Support at networking-support@nvidia.com.

The chapter contains the following sections:

- [General Issues](#)
- [Ethernet Related Issues](#)
- [InfiniBand Related Issues](#)
- [Installation Related Issues](#)
- [Performance Related Issues](#)
- [SR-IOV Related Issues](#)
- [PXE \(FlexBoot\) Related Issues](#)
- [RDMA Related Issues](#)
- [Debugging Related Issues](#)
- [OVS Offload Using ASAP2 Direct Related Issues](#)

Common Abbreviations and Related Documents

Common Abbreviations and Acronyms

Abbreviation/ Acronym	Description
B	(Capital) 'B' is used to indicate size in bytes or multiples of bytes (e.g., 1KB = 1024 bytes, and 1MB = 1048576 bytes)
b	(Small) 'b' is used to indicate size in bits or multiples of bits (e.g., 1Kb = 1024 bits)

Abbreviation/ Acronym	Description
FW	Firmware
HCA	Host Channel Adapter
HW	Hardware
IB	InfiniBand
iSER	iSCSI RDMA Protocol
LSB	Least significant <i>byte</i>
lsb	Least significant <i>bit</i>
MSB	Most significant <i>byte</i>
msb	Most significant <i>bit</i>
NIC	Network Interface Card
SW	Software
VPI	Virtual Protocol Interconnect
IPoIB	IP over InfiniBand
PFC	Priority Flow Control
PR	Path Record
RoCE	RDMA over Converged Ethernet
SL	Service Level
SRP	SCSI RDMA Protocol
MPI	Message Passing Interface
QoS	Quality of Service
ULP	Upper Layer Protocol
VL	Virtual Lane
vHBA	Virtual SCSI Host Bus Adapter
uDAPL	User Direct Access Programming Library

Glossary

The following is a list of concepts and terms related to InfiniBand in general and to Subnet Managers in particular. It is included here for ease of reference, but the main reference remains the *InfiniBand Architecture Specification*.

Term	Description
Channel Adapter (CA), Host Channel Adapter (HCA)	An IB device that terminates an IB link and executes transport functions. This may be an HCA (Host CA) or a TCA (Target CA)
HCA Card	A network adapter card based on an InfiniBand channel adapter device
IB Devices	An integrated circuit implementing InfiniBand compliant communication
IB Cluster/Fabric/Subnet	A set of IB devices connected by IB cables
In-Band	A term assigned to administration activities traversing the IB connectivity only
Local Identifier (ID)	An address assigned to a port (data sink or source point) by the Subnet Manager, unique within the subnet, used for directing packets within the subnet
Local Device/Node/System	The IB Host Channel Adapter (HCA) Card installed on the machine running IBDIAG tools
Local Port	The IB port of the HCA through which IBDIAG tools connect to the IB fabric
Master Subnet Manager	The Subnet Manager that is authoritative, that has the reference configuration information for the subnet
Multicast Forwarding Tables	A table that exists in every switch providing the list of ports to forward received multicast packet. The table is organized by MLID
Network Interface Card (NIC)	A network adapter card that plugs into the PCI Express slot and provides one or more ports to an Ethernet network
Standby Subnet Manager	A Subnet Manager that is currently quiescent, and not in the role of a Master Subnet Manager, by the agency of the master SM
Subnet Administrator (SA)	An application (normally part of the Subnet Manager) that implements the interface for querying and manipulating subnet management data

Term	Description
Subnet Manager (SM)	One of several entities involved in the configuration and control of the IB fabric
Unicast Linear Forwarding Tables (LFT)	A table that exists in every switch providing the port through which packets should be sent to each LID
Virtual Protocol Interconnect (VPI)	An NVIDIA technology that allows NVIDIA channel adapter devices (ConnectX®) to simultaneously connect to an InfiniBand subnet and a 10GigE subnet (each subnet connects to one of the adapter ports)

Related Documentation

Document Name	Description
InfiniBand Architecture Specification, Vol. 1, Release 1.2.1	The InfiniBand Architecture Specification that is provided by IBTA
IEEE Std 802.3ae™-2002 (Amendment to IEEE Std 802.3-2002) Document # PDF: SS94996	Part 3: Carrier Sense Multiple Access with Collision Detection (CSMA/CD) Access Method and Physical Layer Specifications Amendment: Media Access Control (MAC) Parameters, Physical Layers, and Management Parameters for 10 Gb/s Operation
Firmware Release Notes for NVIDIA adapter devices	See the Release Notes relevant to your adapter device
MFT User Manual and Release Notes	NVIDIA Firmware Tools (MFT) User Manual and Release Notes documents
WinOF User Manual	Mellanox WinOF User Manual describes the installation, configuration, and operation of NVIDIA Windows driver
VMA User Manual	NVIDIA VMA User Manual describes the installation, configuration, and operation of NVIDIA VMA driver

Documentation History

- [Release Notes History](#)
- [User Manual Revision History](#)

Release Notes History

- [Release Notes Change Log History](#)
- [Bug Fixes History](#)

User Manual Revision History

Release	Date	Description
5.7	August 2022	<ul style="list-style-type: none">• Added Out of Order (OOO) under RoCE section• Added section describing Dumping Steering Info
	June 2023	Added an important note to IPsec Crypto Offload
5.6	April 2022	<ul style="list-style-type: none">• Added OpenFlow Meters section• Added Installation on Community Operating Systems section
5.5	December 2021	<ul style="list-style-type: none">• Added "Forward to Multiple Destinations" section• Added "Open vSwitch Metering" section• Added "Multiport eSwitch Mode" section• Added "Bridge Offload" section• Added "TC Configuration for ConnectX-6 Dx and Above" subsection

Release	Date	Description
5.4-3	October 2021	<ul style="list-style-type: none"> Removed LASH Routing Algorithm
5.4-2	August 2021	<ul style="list-style-type: none"> Added CT CT NAT section Added Representor Metering section Updated VF Metering section Removed sysfs VXLAN portion of the Enabling VXLAN Hardware Stateless Offloads section
5.4	June 2021	<ul style="list-style-type: none"> Updated SR-IOV Live Migration
5.3-1	March 31,2021	<ul style="list-style-type: none"> Added PTP Cyc2time Hardware Translation Offload section Added Connection Tracking Performance Tuning section Added VF Metering section Added note under OVS-DPDK Hardware Offloads section Updated Persistent Naming section Updated command under Connection Tracking Offload section Added sFlow description under OVS-DPDK Hardware Offloads section
5.2	February 14, 2021	<ul style="list-style-type: none"> Added Setting up MLNX_OFED YUM Repository Using --add-kernel-support section Added Setting up MLNX_OFED apt-get Repository Using -add-kernel-support section
	January 19, 2021	Added OpenSSL with kTLS Offload section
	January 4, 2021	<ul style="list-style-type: none"> Added Offloaded Traffic Sniffer section Added Tx Port Time-Stamping section Added VLAN Push/Pop section Added sFLOW section Added E2E Cache section Added Geneve Encapsulation/Decapsulation section Added Parallel Offloads section Updated SR-IOV VF LAG section

Release	Date	Description
		<ul style="list-style-type: none"> Removed Installing MLNX_OFED on Innova™ IPsec Adapter Cards section Removed Updating Firmware and FPGA Image on Innova IPsec Cards section
5.1-2	September 17, 2020	Added Packet Pacing for Hairpin Queues section
5.1	July 28, 2020	Updated the content of the entire document following the removal of support for ConnectX-3, ConnectX-3 Pro and Connect-IB adapter cards, as well as the deprecation of RDMA experimental verbs library (mlx_lib)
		Added SR-IOV Live Migration section
		Added SR-IOV VF LAG section
5.0-2	April 23, 2020	Added Interrupt Request (IRQ) Naming section
	April 6, 2020	Added Kernel Transport Layer Security (kTLS) Offloads section
5.0	March 3, 2020	<ul style="list-style-type: none"> Added IPSec Crypto Offload section Added OVS-DPDK Hardware Offloads section Updated OVS Hardware Offloads Configuration section
4.7	December 29, 2019	<ul style="list-style-type: none"> Added Configuring Uplink Representer Mode section
	December 13, 2019	<ul style="list-style-type: none"> Added Performance Tuning Based on Traffic Patterns section Added "num_of_groups" entry to table mlx5_core Module Parameters Added .Mediated Devices v5.4-0.5.1.1-Beta section
	September 29, 2019	<ul style="list-style-type: none"> Updated Additional Installation Procedures section
4.6	May 13, 2019	<ul style="list-style-type: none"> ethtool section updates: Added description of -f flashing option to Ethtool Supported Options table
	April 30, 2019	<ul style="list-style-type: none"> ethtool section updates:

Release	Date	Description
		<ul style="list-style-type: none"> ○ Updated the description of ethtool -s eth<x> advertise <N> autoneg on counter under Ethtool ○ Added the following counters under Ethtool: <ul style="list-style-type: none"> ▪ ethtool --show-fec eth<x> ▪ ethtool --set-fec eth<x> encoding auto off rs baser ● Added Devlink Parameters section ● Added Limit Bandwidth per Group of VFs section ● Added Disabling RoCE section ● Added RDMA-CM QP Timeout Control section ● Added RDMA-CM Application Managed QP section
4.5	December 19, 2018	<ul style="list-style-type: none"> ● Reorganized Chapter 2, "Installation": Consolidated the separate installation procedures under Installing NVIDIA OFED and Additional Installation Procedures ● Added Installing NEO-Host Using mlnxofedinstall Script
	November 29, 2018	<p>Added the following sections:</p> <ul style="list-style-type: none"> ● Local Loopback Disable ● Offsweep Balancing

© Copyright 2023, NVIDIA. PDF Generated on 06/05/2024